

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Frame Structure to Support Relay Node Operations	
Date Submitted	2007-01-08	
Source(s)	<p>Hang Zhang, Mark Naden, Wen Tong, Peiying Zhu, Derek Yu David Steer, Gamini Senarath, G.Q. Wang</p> <p>Nortel 3500 Carling Avenue Ottawa, Ontario K2H 8E9</p> <p>Kanchei (Ken) Loa, Yung-Ting Lee, Yi-Hsueh Tsai, Heng-Iang Hsu, Shiann-Tsong Sheu</p> <p>Institute for Information Industry 8F, No. 218, Sec. 2, Dunhua S. Rd., Taipei City 106, Taiwan, ROC</p>	<p>Voice: +1 613 7631315 [mailto:wentong@nortel.com]</p> <p>loa@nmi.iii.org.tw</p>
Re:	A response to a Call for Technical Proposal, http://wirelessman.org/relay/docs/80216j-06_034.pdf	
Abstract	Frame structures of MMR-BS and RS shall be defined to enable backward compatibility and efficient R-link operation. This contribution proposes frame structure design for both MMR-BS and RS.	
Purpose	To incorporate the proposed text into the P802.16j Baseline Document (IEEE 802.16j-06/026r1)	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	

Patent
Policy and
Procedures

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://ieee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

Frame Structure to Support Relay Node Operations

Hang Zhang, Mark Naden, Wen Tong, Peiying Zhu, Derek Yu David Steer, Gamini Senarath, and
G.Q. Wang

Nortel

Kanchei (Ken) Loa, Yung-Ting Lee, Yi-Hsueh Tsai, Heng-Iang Hsu, Shiann-Tsong Sheu

Institute for Information Industry

1. Introduction

The frame structure for the MMR-BS and RS shall be defined to enable backward compatibility and efficient R-link operation. This contribution proposes frame structure design for both MMRBS and RS.

The design for the MMRBS and RS frame structures are:

- Backward compatibility such that no changes are required for MS operation;
- Efficient R-link operation;
- Support for both in-band and out-band relays;
- Minimize delay;
- Minimize changes needed from the current frame structure;
- A single unified frame structure supporting both single-hop and multi-hop relaying
- Preferably a single frame structure to handle all usage scenarios;
- Flexibility to accommodate variable traffic flow
- Support for both centralized scheduler and distributed scheduler

This contribution proposes a frame structure for in-band relay operation. For out-band relay, the existing .16e frame structure can be used without any modifications.

The following assumptions are made for the frame structure design:

For the range extension usage scenario, the MS may not be able to see the BS's preamble; in this case, a RS is required to transmit a preamble and broadcast information to allow the MS to synchronize to the system. In this case, the RS is required to transmit the .16e preamble and broadcast information at the same location in the frame as the BS. Therefore, control information from the MMRBS to the RS must be transmitted in a different location in the frame, since a RS may not be able to transmit and receive at the same time. In our proposal, a Relay Zone (R-Zone) is introduced for communication between the MMRBS and the RS (and similarly for communication between a RS to its child RS).

The frame structure should support simultaneous transmission between MMRBS and RS, MMRBS and MS, RS and RS, and RS and MS to maximize the spatial multiplexing gain. With this consideration, each RS should have a unique cell-ID. In the case where a spatial multiplexing is not required, a group of RS can share the same Cell-IDs (see contribution C802.16j-06/234).

2. MMRBS frame structure and RS frame structure

The IEEE 802.16e frame structure can be adapted for use with RSs by allocating different Zones of the DL and UL sub-frames for BS and RS transmissions.

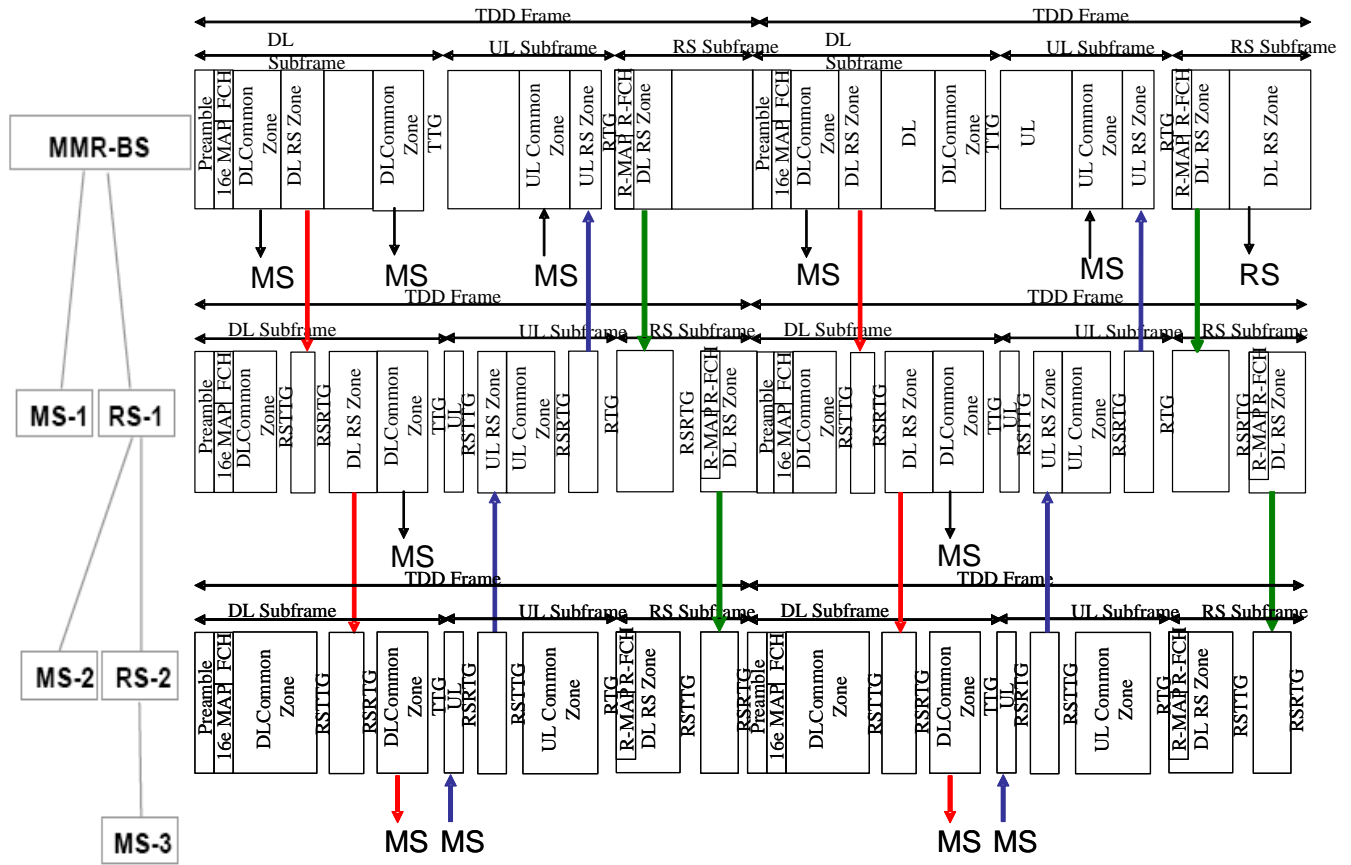


Figure 1 shows the proposed MMRBS frame structure using a 3 hop relay system as an example. The same frame structure applies to a RS located at any hop in a multihop path.

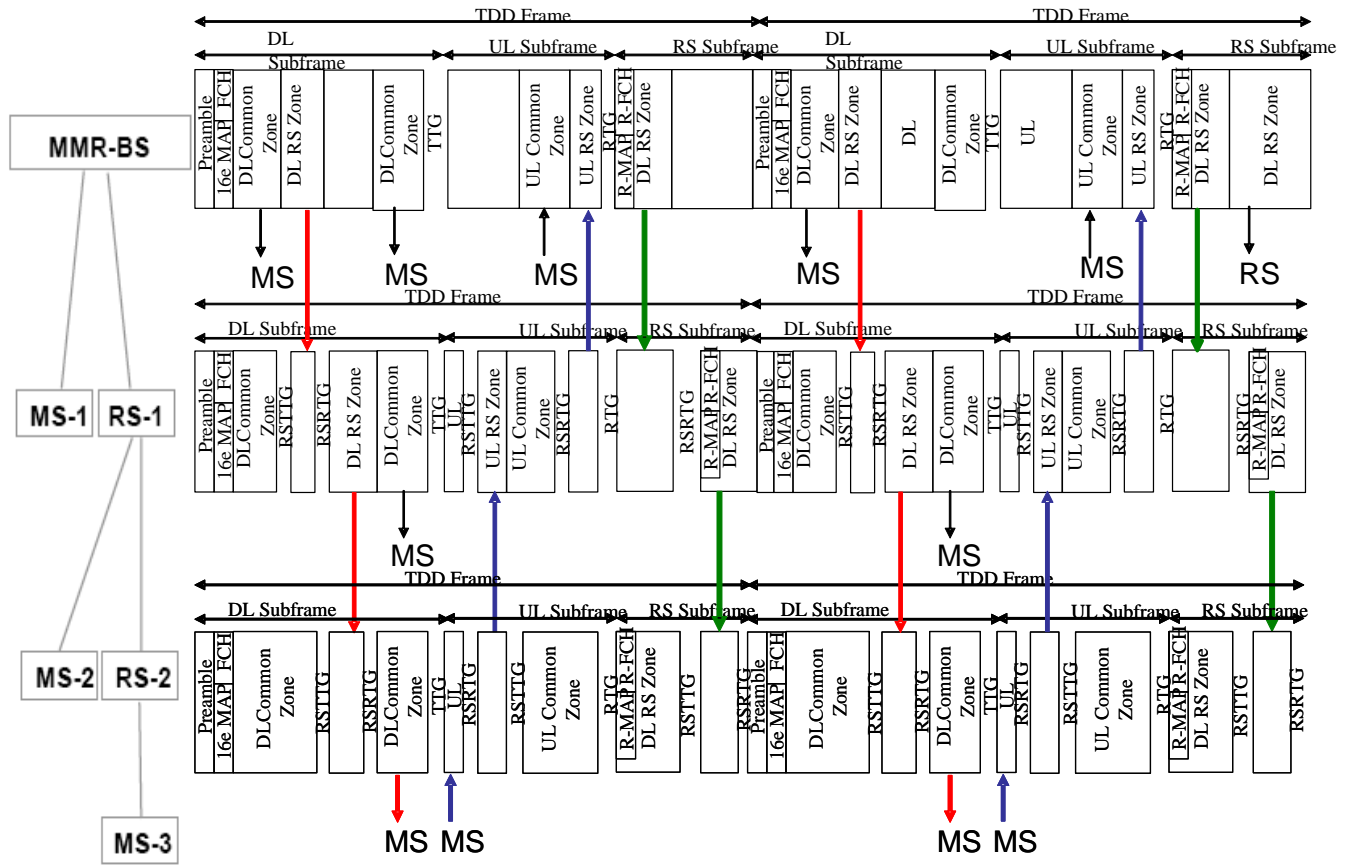


Figure 1 Proposed frame structure for an exemplary 3 hop relay system

2.1 MMR-BS Frame Structure

The MMRBS frame structure proposed is shown in **Error! Reference source not found.**.

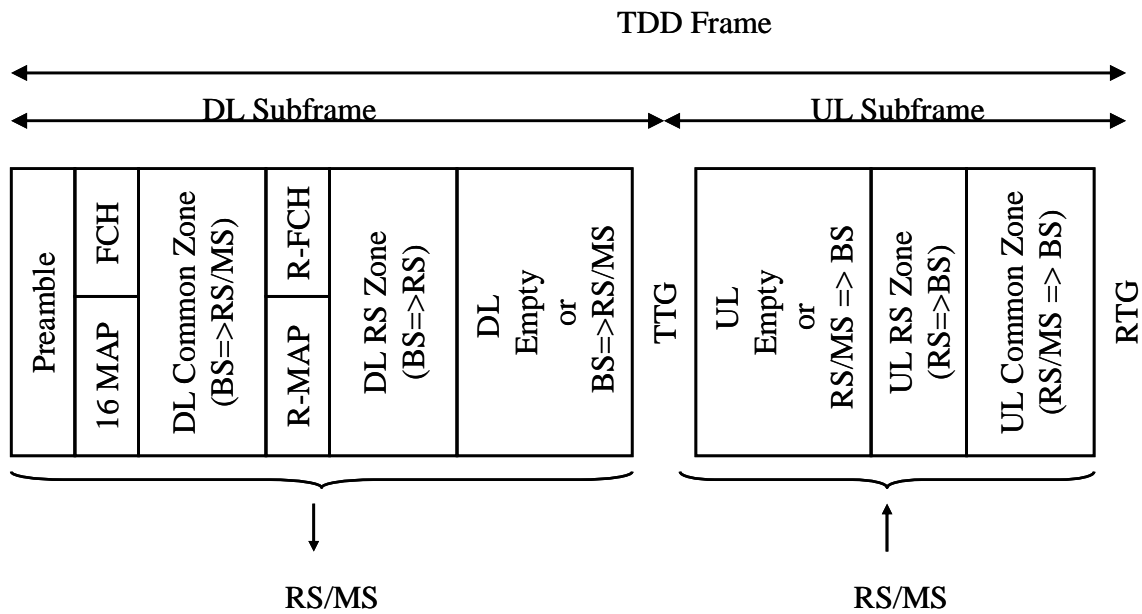


Figure 2 MMR-BS frame structure

In this frame structure, we introduced several zones:

- DL Common_Zone
- DL RS_Zone
- UL Common_Zone
- UL RS_Zone

The DL sub-frame may contain a DL Common_Zone, which is a portion of the DL sub-frame used by an MMR BS for transmission to an MS(s) and/or to an RS(s) that is not required to transmit a preamble, FCH and MAPs at the beginning of the frame. The DL sub-frame may contain zero or one or multiple DL Common Zones.

The DL sub-frame may contain a DL RS_Zone, which is a portion of the DL sub-frame used by an MMR-BS for transmission to an RS(s). The DL RS_Zone is dedicated for the purpose of communication between an MMR-BS and RSs between which it is possible to establish a radio link, and is introduced for the following reasons:

- To enable a serving RS with single radio to transmit an 802.16e preamble, FCH and perhaps MAPs (when needed) to ensure normal operation of an 802.16e MS;
- The control signaling such as resource assignment (R-MAP) between an MMRBS and an RS within the RS_Zone may be transmitted using a more efficient format than that of the 16e MAP IEs to save MAC overhead;
- The data between an MMRBS and an RS within the RS_Zone may be transmitted using more efficient modulation/coding rate and antenna technologies;
- More efficient sub-channelization within RS_Zone may be implemented.

The DL RS_Zone contains R-FCH and R-MAP. R-FCH is used to indicate the R-MAP transmit format and R-MAP is used for the similar functions as DL/UL-MAP.

The rest of the DL sub-frame may be left empty (i.e., no data transmission) if a MMRBS scheduler decides to work with the RS in TDM fashion to reduce the interference, i.e., the duration is reserved for RSs serving their MSs. Alternatively, a MMRBS scheduler may schedule data transmission to an MS(s) in this part of the DL sub-frame, at the same time as RS transmissions, assuming that interference is properly managed.

To reduce the scheduling latency, an optional RS Subframe may be created to include one or multiple DL RS_Zone, as shown in Figure 3. From a MS perspective, RS Subframe is part of the UL Subframe.

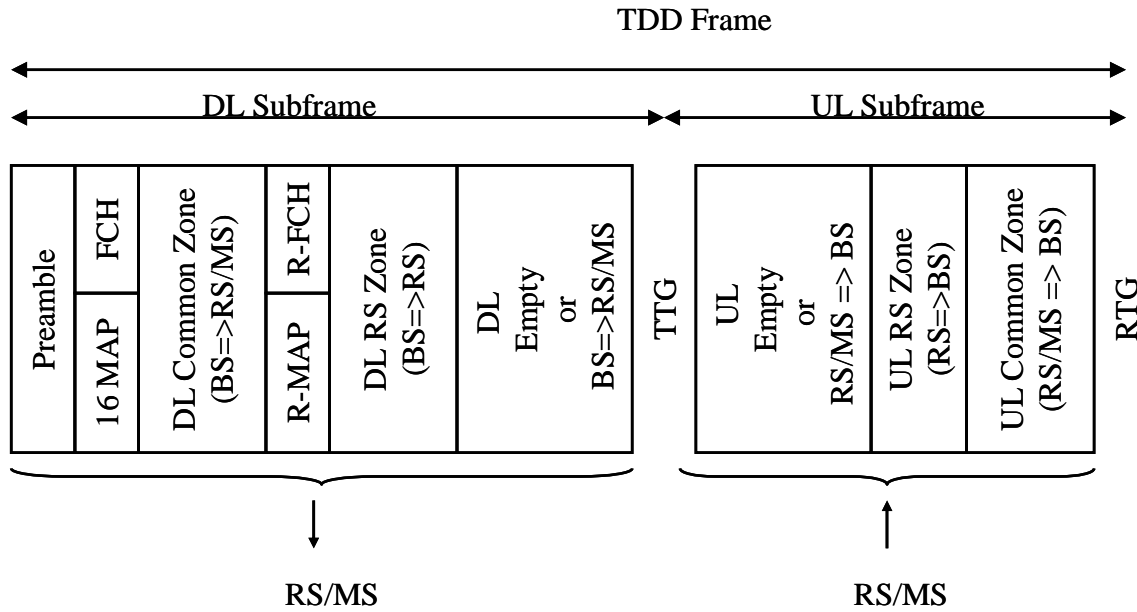


Figure 3 MMR-BS frame structure

2.2 RS Frame Structure

The proposed RS frame structure is shown in Figure 4.

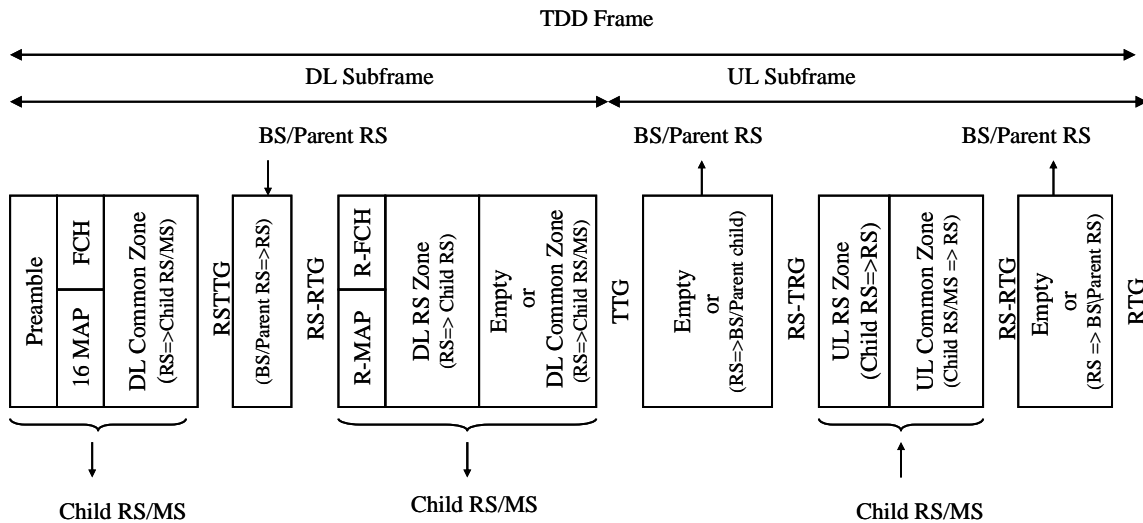


Figure 4 RS frame structure

The frame structure of a serving RS is similar to that of a MMR-BS, except that there may be more than one TTG and more one RTG included for a RS to turn around between transmission and receiving

An RS(s) may use a DL Common_Zone, present in the DL sub-frame, for transmission to MS(s) and or to child RS(s) that are not required to transmit a preamble, FCH and MAPs at the beginning of the frame. RS(s) may use zero or one or multiple DL Common Zones. A RS(s) may use a DL RS_Zone, present in the DL sub-frame, for transmission to child RS(s) that are required to transmit a preamble, FCH and MAPs at the beginning of the frame. RS(s) may use zero or one or multiple DL RS Zones.

The UL sub-frame may contain an UL Common Zone, which is a portion of the UL sub-frame used by an MS(s) for transmission to an MMR BS and or an RS(s). The UL sub-frame may contain zero or one or multiple UL Common Zones.

The UL sub-frame may contain an UL RS Zone, which is a portion of the UL sub-frame used by an RS for transmission to an MMRBS and or an RS(s). The UL sub-frame may contain zero or one or multiple UL RS Zones.

To reduce the scheduling latency, an optional RS Subframe may be created to include one or multiple DL RS_Zone, as shown in Figure 5. From a MS perspective, RS Subframe is part of the UL Subframe.

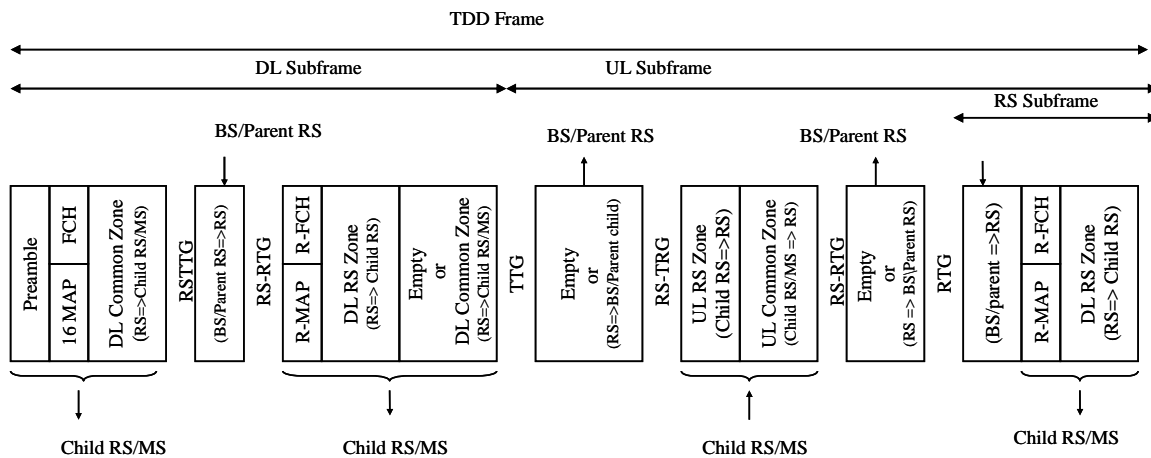


Figure 5 RS frame structure

3. RS_Zone Configuration

RS_Zone (DL/UL) position within a frame can be configured either by a parent RS (distributed) or by the MMRBS (centralized). For centralized RS_Zone configuration, MMRBS shall use RS configuration request/response messages (RS_config-REQ/RSP) to configure each associated RSs' RS_Zone. Once the configurations of RS_Zones of MMRBS or any parent RS are made, the MMRBS or a parent RS should multicast the configuration to its child RSs. Two methods regarding the declaration of the RS_Zone configuration to child RS are proposed:

- **Employment of FCH and R-FCH**

The FCH in each frame is used to indicate the location of the DL RS_Zone within the same frame. The R-FCH is used to indicate the DL RS_Zone within the following frame. The UL RS_Zone location is described by a R-MAP IE

- **Using RS configuration description (RS_CD) broadcast message**

The MMRBS or a parent RS can multicast its RS-Zone configuration through a MAC control message (e.f., RS_CD) message. The information shall include

- RS_Zone superframe length (in unit of frame)
- Description of DL/UL RS_Zones in each frame within the superframe (location/duration)
- Frame number for this configuration to take effect

4. Proposed text change

+++++ Start Text ++++++

4.1 Proposed text change for description of frame structure

[Replace 8.4.4.7 by the following text on Page 370]

8.4.4.7 Frame structure of MMRBS and RS

This section describes the frame structure for a MMRBS and a serving RS.

8.4.4.7.1 MMRBS frame structure

When implementing a TDD system, the MMRBS frame structure is shown in Figure XXX.

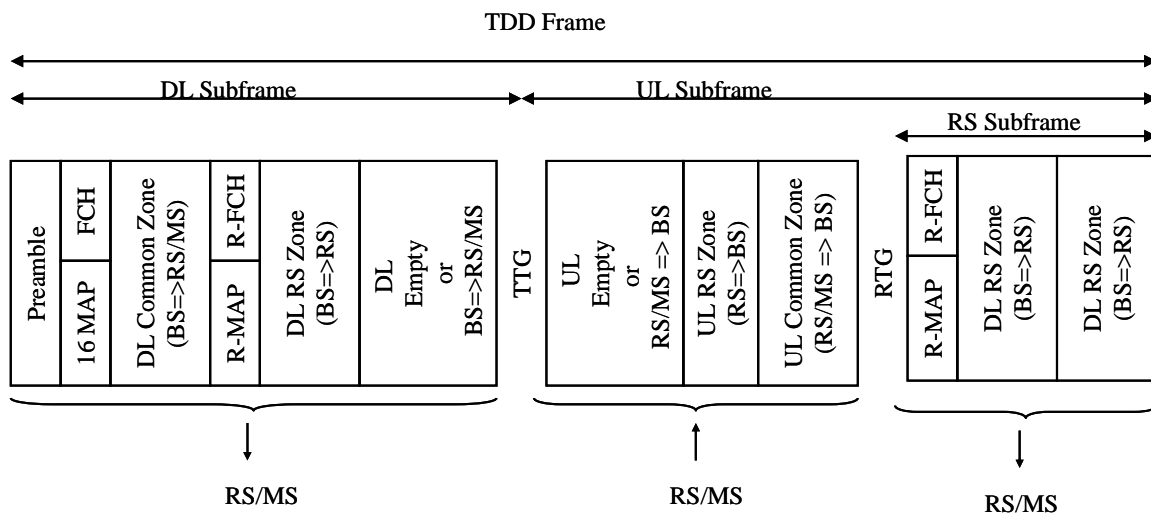


Figure XXX. MMRBS frame structure.

Each MMRBS frame begins with preamble followed by a DL sub-frame and an UL sub-frame, and an optional RS sub-frame.

The frame may contain the following zones:

- **DL Common Zone:** a fraction of DL sub-frame used by an MMR-BS for transmission to an MS(s) and or to an RS(s) that is not required to transmit a preamble, FCH and MAPs at the beginning of the frame;
- **UL Common Zone:** a fraction of UL sub-frame or RS sub-frame (if exists) used for the transmission of 802.16e MS(s)/RS(s) to MMR-BS;
- **DL RS Zone:** a fraction of DL sub-frame used by an MMRBS for transmission to an RS(s);
- **UL RS Zone:** a fraction of UL sub-frame used for receiving from RS(s).

The DL sub-frame may include one or multiple Common Zones and zero or one or multiple DL RS Zones. The UL sub-frame may include zero or one or multiple UL Common Zones and zero or one or multiple UL RS Zones. The RS sub-frame may include one or more DL RS Zones.

In each frame, the TTG and RTG shall be inserted between DL sub-frame and UL sub-frame and at the end of each frame, respectively to allow a MMRBS to turn around.

The first DL RS Zone within a frame shall include R-FCH and may include R-MAP for the purpose to signal the resource assignment for RSs and may include resource assigned to RS(s).

An MMR-BS uses 802.16e MAPs to signal the resource assignments to 802.16e MS(s) and RS(s), which are not required to transmit an 802.16e preamble, FCH and MAPs and uses R-MAP to signal the resource assignment to RS(s) that need to transmit the 802.16e preamble.

8.4.4.7.2 Frame structure of RS

When implementing a TDD system, the frame structure of a RS with preamble transmission is shown in Figure XXX.

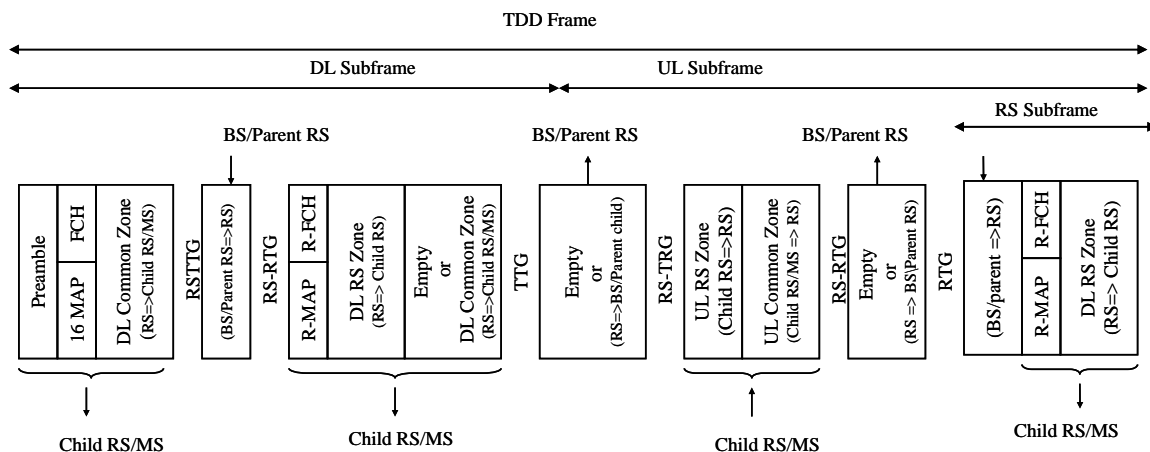


Figure XXX. Frame structure of RS with preamble transmission.

The frame of RS with preamble transmission (serving RS) begins with 802.16e preamble followed by a DL sub-frame, a UL sub-frame, and an optional RS sub-frame.

The frame may contain the following zones:

- **DL Common Zone:** a fraction of DL sub-frame used for the transmission of a serving RS to 802.16e MSs and/or its child RSs, if any, which are not required to transmit 802.16e preamble
- **UL Common Zone:** a fraction of UL sub-frame used for receiving from 802.16e MS(s) and child RS (if any)
- **DL RS Zone:** a fraction of DL sub-frame used for transmission of a serving RS to its child RS(s), if any, which are required to transmit preamble.
- **UL RS Zone:** a fraction of UL sub-frame used for receiving from child RS(s)

The frame structure of a serving RS is similar to that of a MMRBS, except that there may be more than one RS-TTG and more one RS-RTG included for a RS to turn around between transmission and receiving.

4.2 Proposed text change for R-FCH to enable indication of RS_Zone location in the following frame

[Insert section 8.4.4.7.3]

8.4.4.7.3 R-FCH channel

If a DL RS_Zone contains a R-FCH channel, the R-FCH channel shall be transmitted in the first sub-channel. The R_FCH shall be transmitted using QPSK rate ½ with four repetitions. The R-FCH contains the RS-Zone Prefix as described in 8.4.4.7.4. The location of first DL RS_Zone is described by FCH in the same frame as described in 8.4.4.3 and by R-FCH of the previous frame. A RS, during network entry, to identify the location of the first DL RS_Zone based on FCH. A RS, during normal operation, identifies the location of the first DL RS_Zone based on the R-FCH transmitted in the previous frame.

RS-Zone prefix

The RS-Zone prefix is a data structure transmitted on R-FCH of a DL RS_Zone. The RS-Zone prefix includes information regarding the location of RS_Zone in the next frame, information required for decoding R-MAP and etc. Table XXX defines the format of RS_Zone prefix.

<u>Syntax</u>	<u>Size(bits)</u>	<u>Notes</u>
<u>RS_Zone_Prefix_format () {</u>		
<u>RS_Zone location</u>	<u>6</u>	<u>The field indicates the OFDM symbol index reference to the beginning of next frame in unit of 2 OFDM symbols</u>
<u>R-MAP length</u>	<u>5</u>	<u>Length in unit of sub-channel</u>
<u>MCS index used for R-MAP</u>	<u>4</u>	<u>Modulation and coding index</u>
<u>RS_Zone/Common_Zone indicator</u>	<u>1</u>	<u>1: the following zone is a Common_Zone, i.e., this RS_Zone only includes OFDM symbols containing the R-FCH and R-MAP</u> <u>0: the following zone is a RS_Zone, i.e., this RS_Zone includes more OFDM symbols (rather than only symbols containing the R-FCH and R-MAP) for RS related bursts</u>
<u>}</u>		

RS_Zone location

An indicator regarding the location of RS_Zone in the next frame. The first OFDM symbol in each frame is indexed as 0. The RS_Zone location indicates the OFDM symbol index relative to the first OFDM symbol in next frame. The unit is 2 OFDM symbols.

R-MAP length

The length in sub-channels of R-MAP message that immediately follows the RS_Zone prefix.

MCS index used for R-MAP

An indicator indicating the modulation and code rate used for R-MAP message.

RS_Zone/Common_Zone indicator

An indicator indicating whether this RS_Zone only includes OFDM symbols containing R-FCH and R-MAP and is followed by a Common_Zone or this R-FCH is the beginning of a longer RZ-Zone, i.e., this RS_Zone includes more OFDM symbols (rather than only symbols containing the R-FCH and R-MAP) for RS related bursts.

4.3 Proposed text change for FCH to enable indication of the location of DL RS_Zone

[Change row 9 in Table 268 in Page 359 as indicated]

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
Reserved <u>RS_Zone Prefix location</u>	<u>4 bits</u>	Shall be set to zero <u>Indicates the OFDM symbol index relative to the beginning of current frame in unit of 2 OFDM symbols.</u>

[Insert the following sentence at end of page 359]

RS_Zone Prefix location

Indicates the OFDM symbol index relative to the beginning of current frame in unit of 2 OFDM symbols.

4.4. Proposed text change for enabling RS_Zone configuration superframe

[Add new sections 6.3.2.3.62 after section 6.3.2.3.61 in page 172]

6.3.2.3.63 RS configuration description message

This message is a broadcast/multicast message among all or group of associated RSs of a MMRBS. This message is transmitted by a MMRBS and forwarded by intermediate RSs or transmitted by a parent RS. This message is used by a MMRBS to broadcast description of configuration specific to all of its associated RSs to enable RSs' operations, such as network entry, initialization, and 802.16e traffic forwarding.

Table XXX. RS configuration description (RS-CD) message format.

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>RS_CD format {</u>		
<u>Management message type = 67</u>	<u>8 bits</u>	
<u>TLVs</u>	<u>Variable</u>	<u>Configuration TLV</u>

<u>1</u>		
----------	--	--

[Add new sections 11.20]

11.20 RS CD encodings

Name	Type	Length	Value
RS_Zone superframe configuration	1	Variable	Bits #0-3: superframe length (in frames) For each frame (for loop) Number of DL RS_Zone For each DL RS_Zone Location (OFDM symbol index relative to the beginning of the frame and duration in OFDM symbols Number of UL RS_Zone For each UL RS_Zone Location (OFDM symbol index relative to the beginning of the UL sub-frame and duration in OFDM symbols
Effective time in frame number	1	1	8 LSB of frame number

+++++++ End Text ++++++

Reference

[1] “Relay Grouping and PUSC Segment Selection for FCH/MAP Transmission”, Hang Zhang, Derek Yu, Peiying Zhu, Wen Tong, David Steer, Gamini Senarath, Mark Naden, G.Q. Wang, C802-16j_06/234