

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	Space Time Coding (STC) with Antenna Selection	
Date Submitted	<b>2007-11-11</b>	
Source(s)	Sang G. Kim, Shu Wang, Li-Hsiang Sun and Ki-Dong Lee LG Mobile Research U.S.A.* San Diego, CA 92131	Voice: 858-635-5294 E-mail:sanggook@lge.com * <a href="http://standards.ieee.org/faqs/affiliationFAQ.html">http://standards.ieee.org/faqs/affiliationFAQ.html</a> >
Re:	[Cite the specific document number of the appropriate Call for Contributions, the ballot number, etc. Contributions that are not responsive to this section of the template, may be refused or assigned a low priority for review.]	
Abstract	Space time coding provides transmit diversity gain while antenna selection gives highest signal-to-interference-plus noise ratio (SINR) when the instantaneous channel status is available at the transmit side and channel varies slowly. We propose the architecture for joint transmit diversity based on space time coding (STC) and antenna selection based on the channel status information	
Purpose	To be discussed and adopted by TGM for use in the 802.16m SDD	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < <a href="http://standards.ieee.org/guides/bylaws/sect6-7.html#6">http://standards.ieee.org/guides/bylaws/sect6-7.html#6</a> > and < <a href="http://standards.ieee.org/guides/opman/sect6.html#6.3">http://standards.ieee.org/guides/opman/sect6.html#6.3</a> >. Further information is located at < <a href="http://standards.ieee.org/board/pat/pat-material.html">http://standards.ieee.org/board/pat/pat-material.html</a> > and < <a href="http://standards.ieee.org/board/pat">http://standards.ieee.org/board/pat</a> >.	

# Space Time Coding with Antenna Selection

*Sang G. Kim, Shu Wang, Li-Hsiang Sun and Ki-Dong Lee*

*LG Electronics*

**Suggested ToC Topic for IEEE 802.16m SDD:** Support of Advanced Antenna Techniques

**Title:** Space Time Coding with Antenna Selection

**Description:** We propose the architecture for joint transmit diversity based on space time coding (STC) and antenna selection based on the channel status information. Space time coding scheme includes space-time block code (STBC), cyclic shift diversity, cyclic delay diversity (CDD), precoding, and etc. However, we mainly focus and describe STBC and CDD. It is known that antenna selection gives highest signal-to-interference-plus noise ratio (SINR) when the instantaneous channel status is available at the transmit side and channel varies slowly. Hence, it performs well in the case of low mobility like indoor application. However, the performance degradation manifests when the channel varies relatively faster than the time required to feedback the channel status to the transmitter. Transmit diversity on the space time coding and inherently assume no channel status information. Hence, they provide relatively robust operation in medium to high mobility case, e.g., cellular application. By combining transmit diversity with antenna selection in a unified manner, we provide architectures that gives antenna selection gain to stationary to low-speed users and diversity gain to medium to high-speed users. Transmit diversity combined with antenna selection is considered in [1] in the context of single carrier transmission. In this contribution, multiple band operation with basic unit of bandwidth  $N$  Hz is assumed. It may assume that the channel coherence bandwidth is  $N$  Hz. The total bandwidth is  $M \times N$  Hz. The transmission is assumed to happen over one sub-band out of  $M$  sub-bands. The receiver may equip with more than one antenna element. Figure 1 and Figure 2 show the proposed architectures for STC with antenna selection and CDD with antenna selection, respectively.

[1] Dhananjay A. Gore and Arogyaswami J. Paulraj, "MIMO Antenna Subset Selection with Space-Time Coding", IEEE Trans. On Signal processing, vol. 50, No.10, October 2002

**Related Area(s) in SRD:** Section 5.7: Support advanced antenna techniques, Section 7.1: User throughput, Section 7.2: Sector throughput and VoIP capacity, Section 7.4: Cell coverage

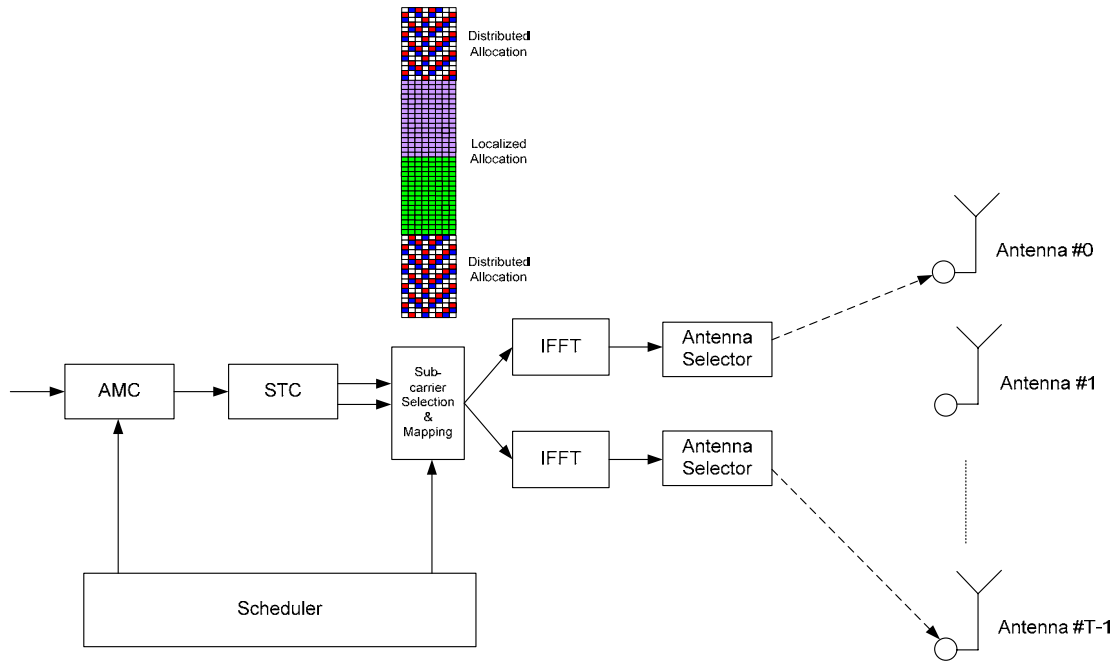


Figure 1: Architecture for Transmit Diversity Combined with Antenna Selection and OFDM for Transmission

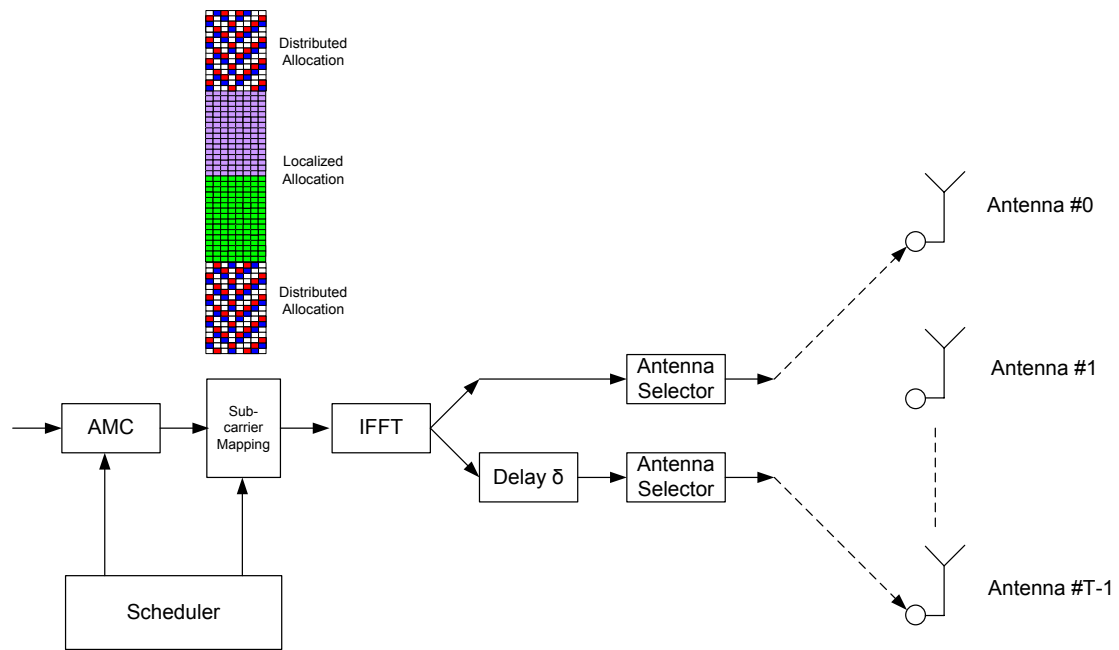


Figure 2: Architecture for Cyclic Delay Diversity Combined with Antenna Selection and OFDM for Transmission