

# Downlink MIMO Schemes for IEEE 802.16m

## IEEE 802.16 Presentation Submission Template (Rev. 9)

Document Number:

S80216m-08\_285

Date Submitted:

2008-05-05

Source:

David Mazzaresse, Taeyoung Kim, Eun Yong Kim                      d.mazzaresse@samsung.com

Jerry Pi, Hokyu Choi, Heewon Kang

Samsung Electronics

Bruno Clerckx

bruno.clerckx@samsung.com

Samsung Advanced Institute of Technology

Venue:

Call for Contributions on IEEE 802.16m-08/003r1 System Description Document (SDD)

Topic: Downlink MIMO schemes

Base Contribution:

C80216m-08\_285

Purpose:

Discussion and approval

Notice:

*This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups.* It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and <<http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <<http://standards.ieee.org/board/pat/pat-material.html>> and <<http://standards.ieee.org/board/pat>>.


# Scope of MIMO Proposal for May 2008

- DL MIMO schemes
- UL control structures (related to MIMO)


# Proposed Scope of Downlink MIMO

Scope of support	Method of support
Support of robust MIMO on traffic channels	Downlink single-user open-loop MIMO
Support of high downlink user throughput	Downlink single-user open-loop MIMO Downlink single-user closed-loop MIMO
Support of high downlink sector throughput	Downlink multiuser MIMO (SDMA) for fixed and nomadic users
Flexible MIMO CQI and CSI Feedback	Unquantized and quantized CSI feedback CQI (CINR and ESINR, wideband and differential) Adapted to MS conditions and duplexing mode
Support of various cell configurations	Optimized for robustness in channel with correlated, uncorrelated, cross-polarized BS antennas

# MIMO Architecture

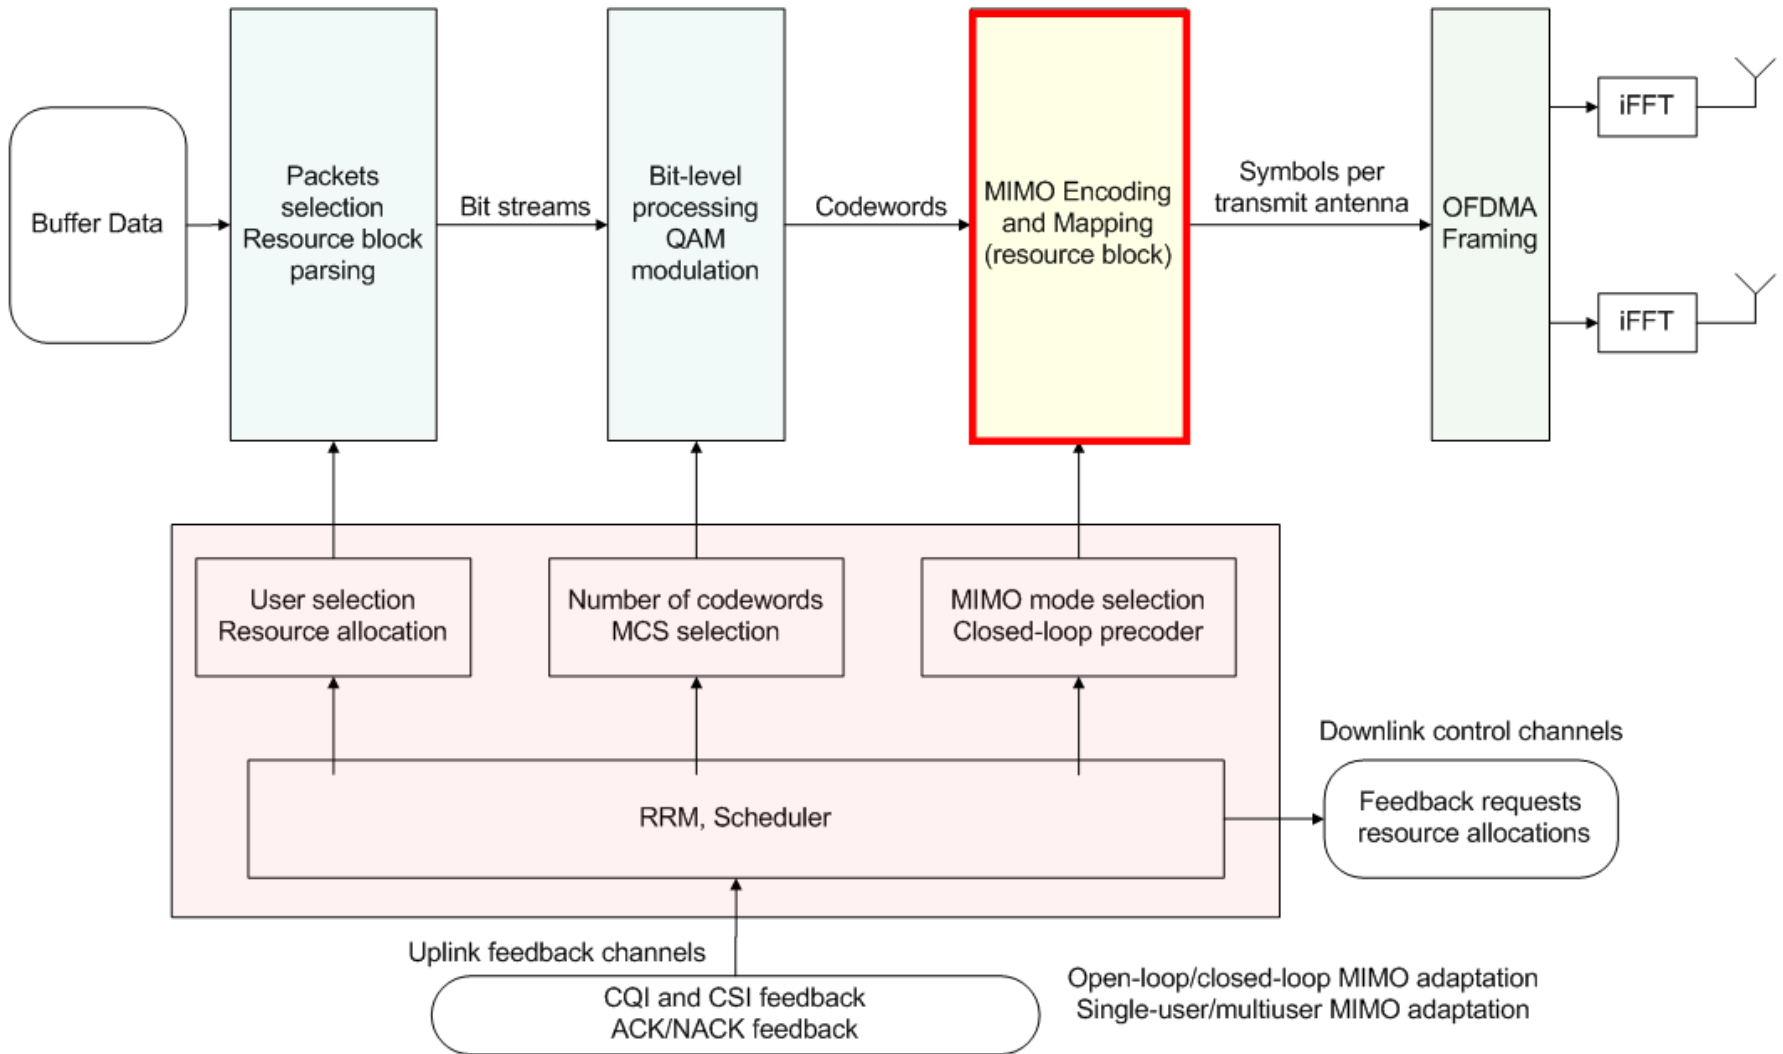

# MIMO Processing

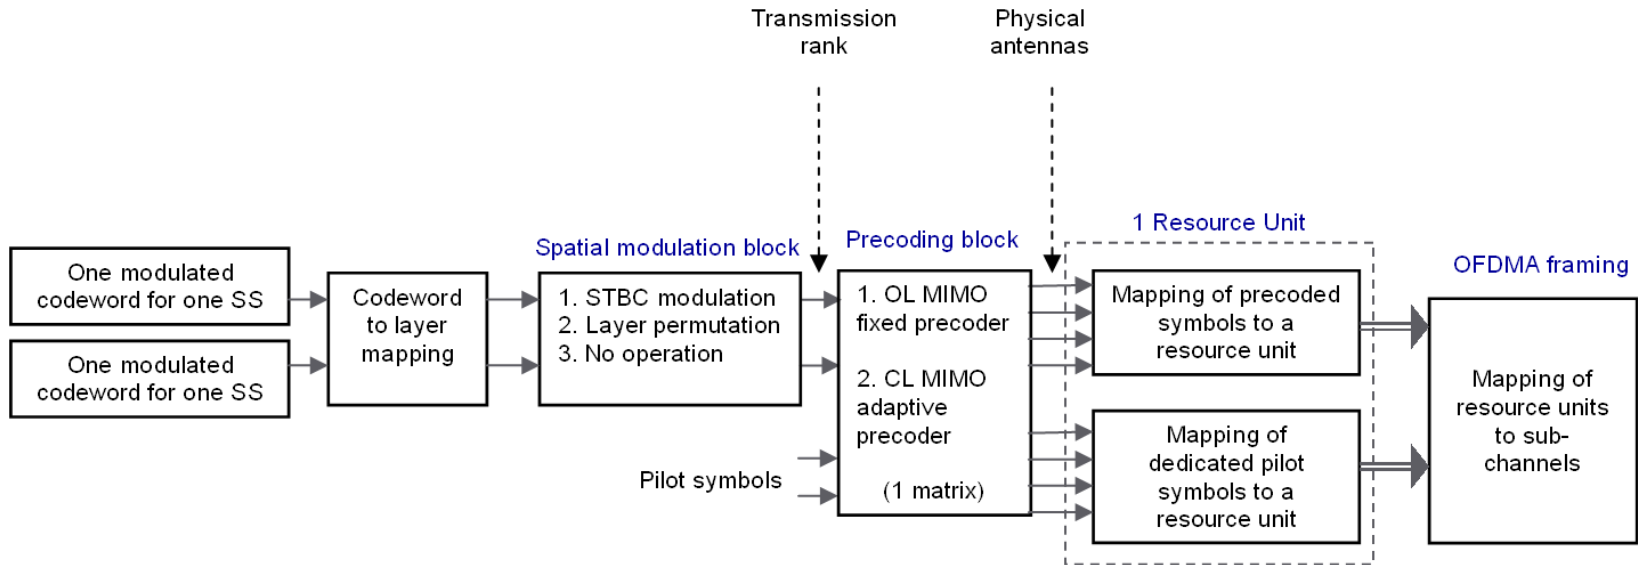

Note 1: optional layer permutation block for spatial multiplexing and single-user precoding

Note 2: the precoder is never applied to measurement pilots (i.e. MIMO CQI pilots)

Note 3: the number of codewords per MS, the transmission rank per MS, and the number of MS per resource unit are configurable

# Definitions

- **Transmission rank in SU MIMO**
  - Number of columns of the precoder
  - i.e. number of dedicated pilots in a Resource Unit
- **Fixed pre-determined precoder in OL MIMO**
  - To set the transmission rank in SU OL MIMO
- **Adaptive closed-loop precoder in CL MIMO**
  - Adapted to feedback of channel state information (CSI)  
(i.e. with uplink sounding, codebook feedback)

# Usage of Precoders

- MIMO precoder
  - Fixed pre-determined “open-loop” precoder
    - For transmit power balance among physical antennas
    - For transmission rank adaptation in SU OL MIMO
  - Adaptive closed-loop precoder
    - For matching beams to the actual channel condition
    - Inherent rank adaptation in SU and MU CL MIMO
- Both precoders are supported by a single precoding block
  - Fixed precoder is not applied to the measurement (MIMO CQI) pilots
  - Fixed and closed-loop precoders are never concatenated

# Downlink MIMO Modes

BS transmit antennas	Transmission scheme	Rank	Precoder
N 2, 4, 8	OL MIMO (SU)	$r \leq 4$	$r \times N$ fixed precoder  Frequency-dependent known at MS unitary constant modulus matrix
N 2, 4, 8	CL precoding (SU, MU)	1 to 4	Adaptive precoder

In diversity sub-channels: maximum rank is 2 supported by common pilots, so closed-loop precoding is not allowed



# Downlink Open-Loop MIMO Schemes

- Transmission of downlink control channels
  - Using baseline 2 transmit antennas
  - Baseline transmit diversity scheme is TBD
  - For more than 4 transmit antennas at the BS
    - the fixed pre-determined precoder shall be applied to common pilots and data in diversity sub-channels to enable the use of the baseline TBD transmit diversity scheme
- Transmission of downlink traffic channels
  - Fixed precoder (+ open-loop spatial multiplexing)
  - Fixed precoder (+ transmit diversity scheme TBD)

# Closed-Loop Precoding

## single-user and multiuser

- TDD with DL/UL channel reciprocity
  - Feedback: uplink sounding
  - Precoding: implementation-dependent
- FDD
  - Feedback: index of precoder in a codebook
  - Precoding: unitary precoding matrix
- Codebook size
  - Simple codebook that reduce as much as possible the complexity of codebook search and CQI calculation
  - Small memory size requirements

# Closed-Loop Precoding

BS transmit antennas	Single-user MIMO Scheme Codebook size	Multiuser MIMO Scheme Codebook size
2 Tx	3 bits	2 bits
4 Tx	4 bits	3 bits
8 Tx	3 bits	2 bits

- Codebook-based unitary precoding with rank adaptation
- Consider the use of differential codebooks to reduce the feedback overhead or to decrease the quantization error

# SU MIMO Unitary Precoding

Feature	Properties
Codebook = set of unitary matrices	<ul style="list-style-type: none"><li>• DFT matrices for robustness in correlated and uncorrelated channels</li><li>• Additional unitary matrices for cross-polarized channels</li><li>• Constant modulus for power balance of transmit power amplifiers</li></ul>
Feedback = MS preferred precoder index (PCI) and CQI	<ul style="list-style-type: none"><li>• Determine the preferred precoder among all possible unitary precoders (whose size vary from <math>[N_t \times 1]</math> to <math>[N_t \times r]</math> with <math>r = \min\{N_t, N_r\}</math>)</li><li>• Feedback one or more CQIs</li><li>→ Accurate ESINR prediction</li></ul>
BS precoding	Downlink transmission using selected columns from a unitary matrix of the codebook

# MU MIMO Unitary Precoding

Feature	Properties
Codebook = set of unitary matrices Same codebook at BS and MS	<ul style="list-style-type: none"><li>• DFT matrices for robustness in correlated and uncorrelated channels</li><li>• Constant modulus for power balance of transmit power amplifiers</li></ul>
Feedback = MS preferred precoder index (PCI) and CQI	<ul style="list-style-type: none"><li>• Determine the preferred column in preferred unitary matrix (PCI)</li><li>• Assume interference from other columns of the same unitary matrix in the CQI feedback</li></ul> → Accurate ESINR prediction
BS precoding	<ul style="list-style-type: none"><li>• Downlink transmission using columns from the same unitary matrix of the same codebook</li><li>• Transmit to several MS with 1 beam per MS</li></ul>

# Downlink Pilots

- Measurement (CQI) pilots
  - For MIMO feedback (MIMO scheme, CQI, PCI)
  - Scattered common pilots in one subframe every frame (5 ms)
  - Not precoded by fixed precoder
  - Support up to 2, 4 and 8 transmit antennas at the BS
  - 1.11 % overhead to support MIMO measurements (4, 8 Tx)
- Demodulation pilots
  - The downlink dedicated pilots shall be processed by the same precoding matrix as used on the data (either the fixed or adaptive precoder)

# Feedback Information

Feedback information	Features
Full channel state information (TDD with channel reciprocity)	BS measure downlink channel from uplink sounding signals Support any implementation-dependent solution
Index of precoder from a codebook	Codebook search required at MS Accurate prediction of CQI (i.e. ESINR) at MS

# Uplink Control Structures

## Feedback Channels

Uplink control channel	Properties
Uplink Sounding Symbol	An uplink sounding OFDM symbol shall be supported
CQICH	Uplink physical CQICH <ul style="list-style-type: none"><li>• Very robust modulation and coding scheme</li><li>• Distributed fractional resource units</li></ul>
Feedback header	Efficient feedback method with allocated of uplink resource outside CQICH with adaptive MCS
Feedback sub-header	Sending control information in traffic channels <ul style="list-style-type: none"><li>• Efficient feedback method with allocated uplink resource for traffic</li></ul>




# Simulation Conditions

Transmission bandwidth	20 MHz
Centre frequency	2.5 GHz
Subframe duration	0.6171 ms
Subcarrier spacing	10.938 kHz
FFT size	1024
Number of occupied subcarriers	1008
Number of OFDM symbols per subframe	6
Number of subcarriers per Resource Unit	18
Spatial channel environment	<p>Modified PedB channel, 3 km.h, uncorrelated at MS</p> <ul style="list-style-type: none"> <li>- Uncorrelated case: 4 wavelengths spacing and 15 degree angular spread at the base</li> <li>- Correlated case: <math>\frac{1}{2}</math> wavelength spacing and 3 degree angular spread at the base</li> <li>- Dual polarized case: <math>\pm 45^\circ \rightarrow</math> V-H, <math>\frac{1}{2}</math> wavelength spacing and 3 degree angular spread at the base</li> </ul>
CQI feedback	6 subframes delay, error-free
Uplink sounding	18 dB power difference between DL and UL
Feedback load	Full feedback (for every resource unit), 10 users
Downlink pilot overhead	2 Tx: 11.11%, 4 Tx: 22.22%
Channel estimation	Ideal
MIMO detection method	Linear MMSE
Modulation and coding	10 MCS levels
HARQ	Chase Combining, non-adaptive, 8 subframes retransmission delay, maximum 4 retransmissions

# Multi-User Closed-loop MIMO


Feedback: uplink sounding

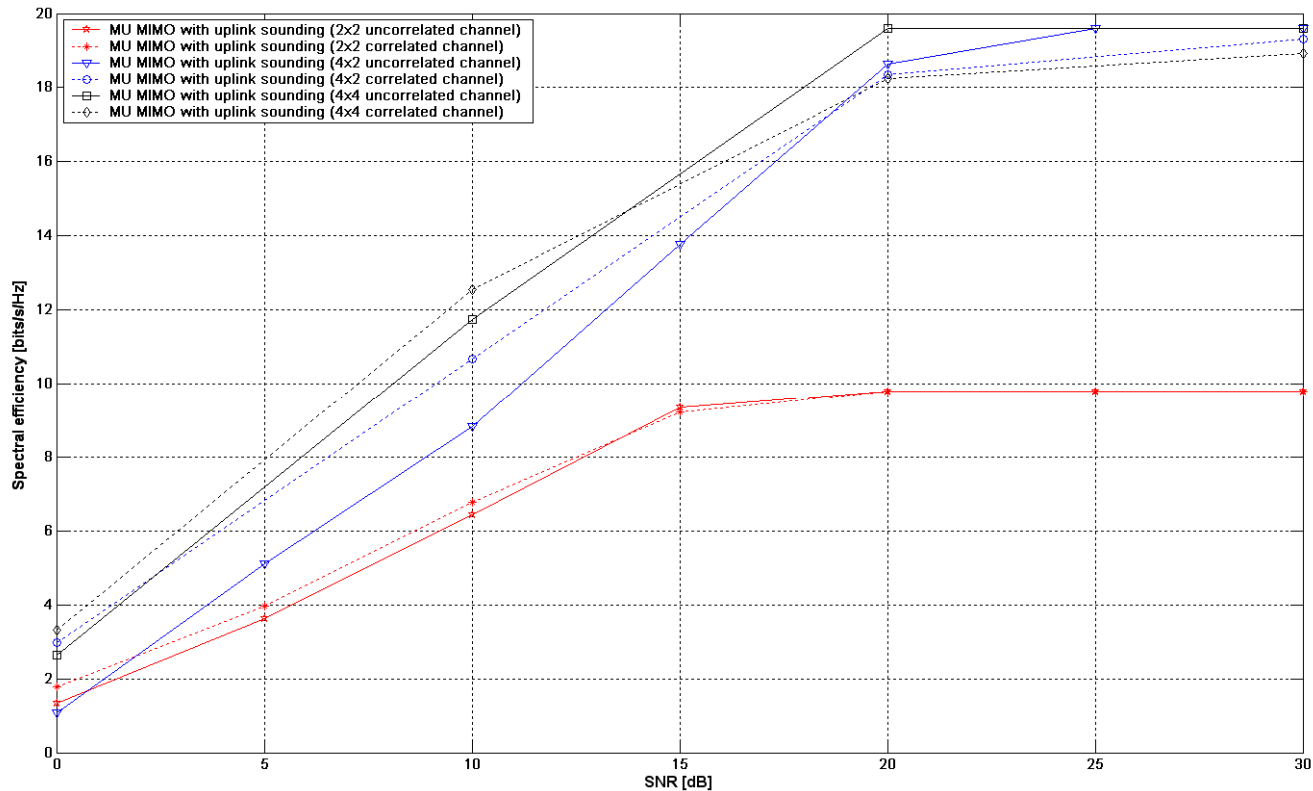

- Uplink sounding allows to achieve the highest spectral efficiency at high SNR

# Multi-User Closed-loop MIMO


Feedback: codebook-based

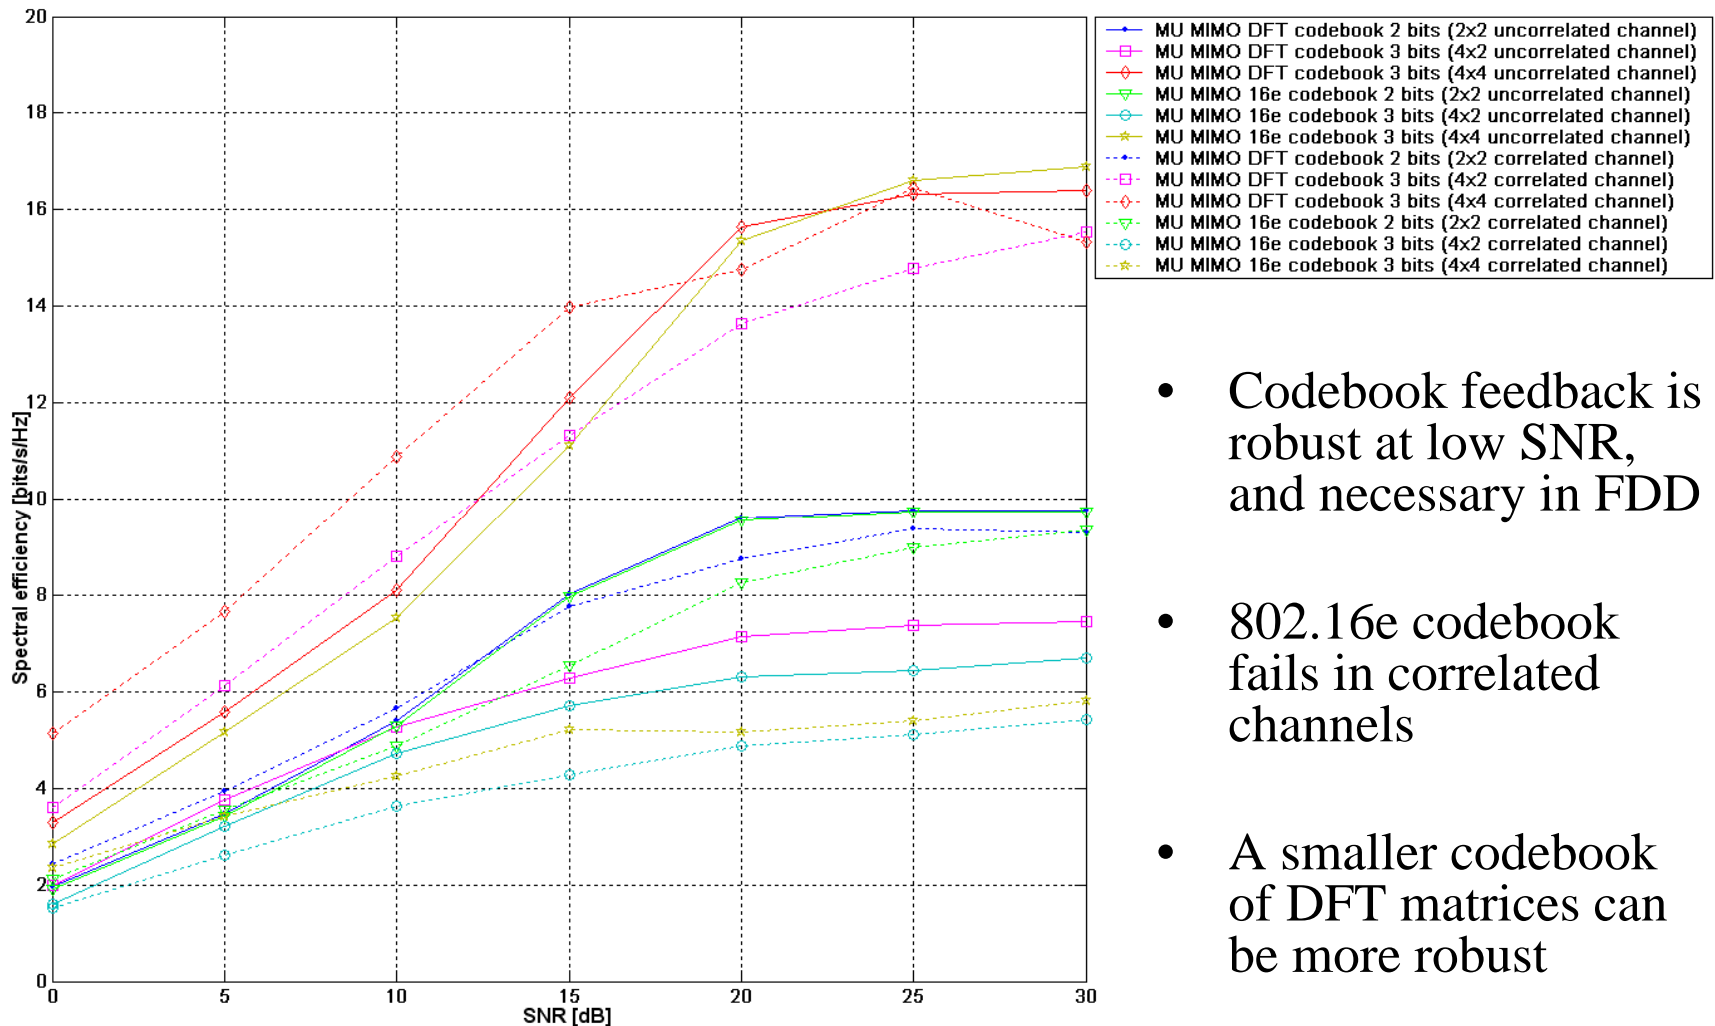

- Codebook feedback is robust at low SNR, and necessary in FDD
- 802.16e codebook fails in correlated channels
- A smaller codebook of DFT matrices can be more robust

# Single-User Closed-loop MIMO


Feedback: uplink sounding

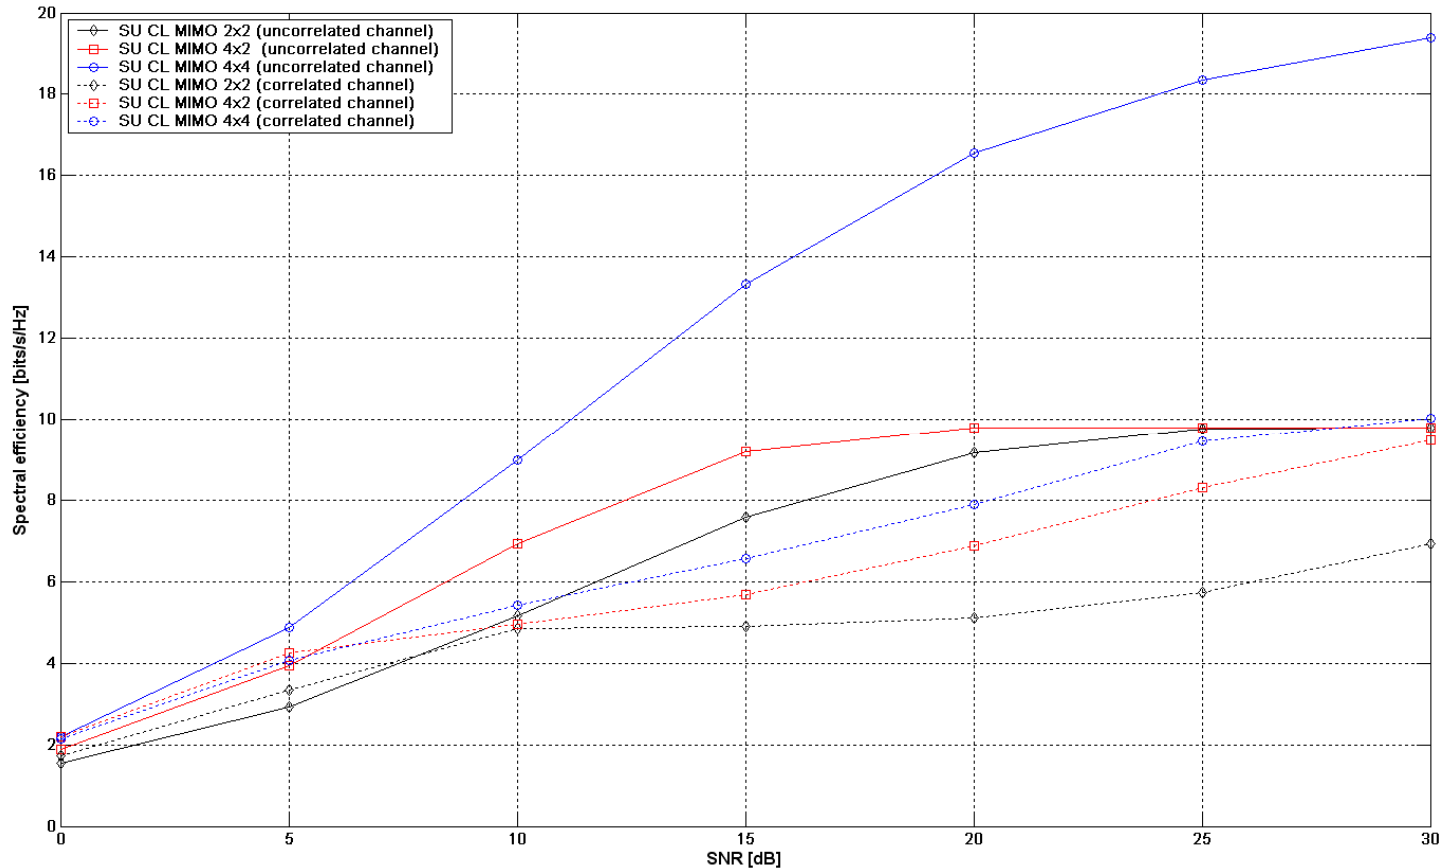

- Uplink sounding allows to achieve a higher spectral efficiency at medium to high SNR than with codebook-based feedback

# Single-User Closed-loop MIMO

Feedback: codebook-based

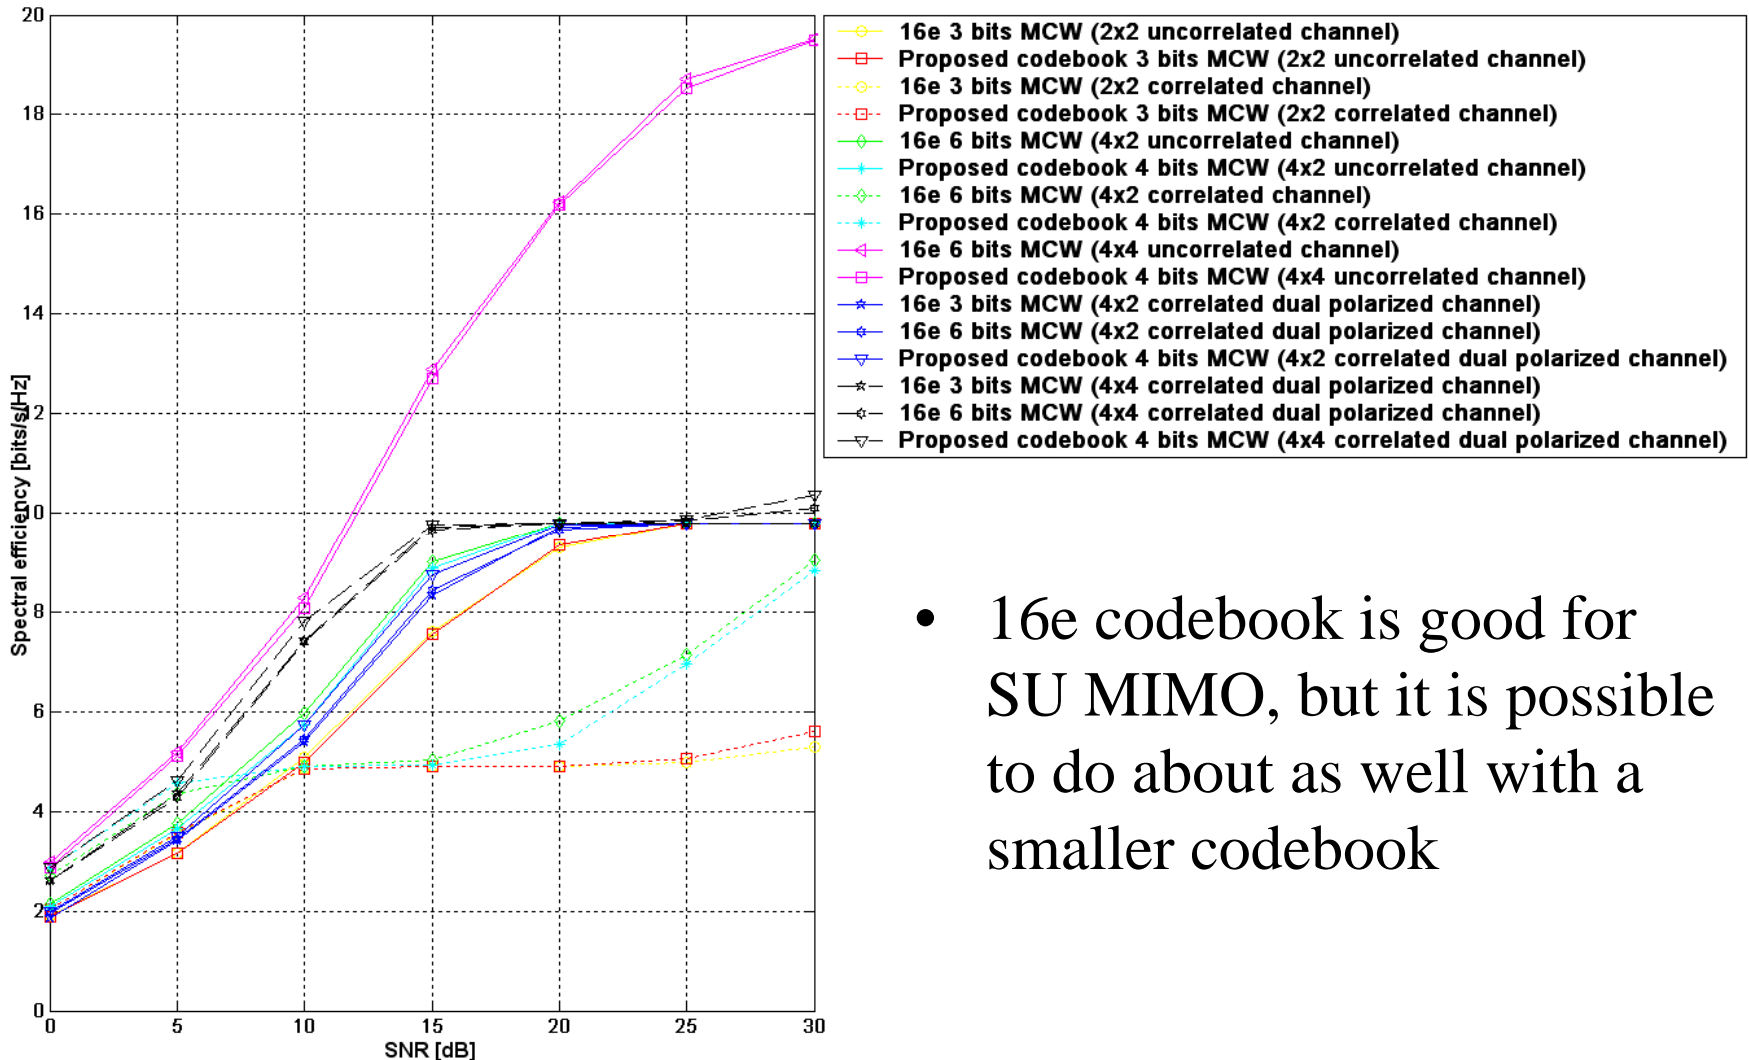

- 16e codebook is good for SU MIMO, but it is possible to do about as well with a smaller codebook