

Reply Comments to C802.16m-08/073

Document Number: 80216m-08/115r1

Date Submitted: Jan. 21, 2008

Source:

Hongming Zheng

hongming.zheng@intel.com,

Yang-seok Choi

yang-seok.choi@intel.com,

May Wu

may.wu@intel.com,

Nageen Himayat

nageen.himayat@intel.com

Intel Corporation

Venue:

TGm Call for comments on EVM, IEEE 802.16m-07/048, Levi FI

Base Contribution:

C80216-08/115

Purpose:

Reply comments to contribution C802.16m-08/073 and MMIB performance evaluation

Notice:

This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and <<http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <<http://standards.ieee.org/board/pat/pat-material.html>> and <<http://standards.ieee.org/board/pat>>.

Outline

- Reply to Comments in C802.16m-08/073
- MMIB Performance Evaluation

Reply to Comments 1-4 in C802.16m-08/073

- Comments 1-4 highlight discrepancies between the expected and calculated RBIR values from the tables provided for specific channel matrices.
- Observations:
 - Computation of the RBIR metric for horizontal encoding involves a numerical approximation to calculate (AVE, VAR) and the parameter 'a'
 - RBIR has been optimized for horizontal encoding
 - Vertical encoding is an extension of horizontal encoding with the addition of parameters p1 and p2. This approximation is suboptimal.
 - The accuracy in the RBIR values can be improved by
 - Using a better numerical approximation for (AVE, VAR)
 - Determining the parameter 'a' with finer granularity
 - Determining p1 and p2 with finer granularity

Reply to Comments 5-7 in C802.16m-08/073

- Reply to Comment 5: Although RBIR requires calculation of parameters for a number of different code rates, this leads to improved accuracy in prediction of PER as a function of code rate. For unspecified code rates in the Tables, the parameters can be interpolated.
- Reply to Comment 6: An improved approximation is provided in contribution C80216m-08/67
- Reply to Comment 7: A simplified, but suboptimal search for parameters p_1 and p_2 can be used.
 - The range of k and λ_{\min} over which the search is performed is first quantized to a set of values
 - For a given range of k and λ_{\min} , pick a value of p_1 and search for p_2 . Now use this value of p_2 to determine p_1 . Repeat this process iteratively until the values of p_1 and p_2 converge. For this reason, the same numerical approximation as the horizontal encoding case may be used and the constraint $p_1 + p_2 = 1$ is not necessary.
 - Repeat this process for all chosen ranges of k and λ_{\min}

Horizontal Encoding not Supported by MMIB

- The current formulation of the MMIB method can not be used for horizontal encoding. According to the equation below, the MI metric cannot be divided into two metrics, one for each stream. MMIB supports only vertical encoding. The current text in the EM is incomplete.

$$[\gamma(1), \gamma(2), \gamma(3)] = \text{sort}_{asc} \{ \lambda_{\max} p_a + \lambda_{\min} (1 - p_a), \lambda_{\min} p_a + \lambda_{\max} (1 - p_a), \\ \lambda_{\max} (1 - 2\sqrt{p_a(1-p_a)}) + \lambda_{\min} (1 + 2\sqrt{p_a(1-p_a)}) \}$$

- The RBIR method supports both vertical and horizontal encoding

MMIB as a Bit Level Metric

The final MI value is an approximation that is an average of all bit level metrics per symbol in any modulation constellation.

$$QPSK: I_2^{(2 \times 2)}(\lambda_{\min}, \lambda_{\max}, P_a) = \frac{1}{2} J(a\sqrt{\gamma(1)}) + \frac{1}{2} J(b\sqrt{\gamma(2)}), \quad a = 0.85, b = 1.19$$

$$16QAM / 64QAM: I_m^{(2 \times 2)}(\lambda_{\min}, \lambda_{\max}, p_a) = \frac{1}{3} \left[J(a\sqrt{\gamma(1)}) + J(b\sqrt{\gamma(2)}) + J(c\sqrt{\gamma(3)}) \right]$$

MMIB is therefore not a true bit-level metric

Inaccuracies in MMIB (1)

16 QAM	$1 < \kappa \leq 10$	$10 < \kappa \leq 100$	$\kappa > 100$
$-10dB < \lambda_{\min} < 8dB$	$a = 0.48, b = 0.27$ $c = 0.69$	$a = 0.40, b = 0.21$ $c = 0.56$	$a = 0.32, b = 0.13$ $c = 0.37$
$\lambda_{\min} > 8dB$	$a = 0.35, b = 0.43$ $c = 0.59$	$a = 0.37, b = 0.33$ $c = 100$	$a = 0.42, b = 0.11$ $c = 100$

64 QAM	$1 < \kappa \leq 10$	$10 < \kappa \leq 100$	$\kappa > 100$
$-10dB < \lambda_{\min} < 8dB$	$a = 0.23, b = 0.16$ $c = 0.59$	$a = 0.12, b = 0.12$ $c = 0.38$	$a = 0.08, b = 0.07$ $c = 0.17$
$\lambda_{\min} > 8dB$	$a = 0.20, b = 0.21$ $c = 0.62$	$a = 0.22, b = 0.13$ $c = 100$	$a = 0.24, b = 0.08$ $c = 100$

- In Tables 30 and 31, parameters a, b, c for $\lambda_{\min} < -10dB$ are not specified
- For MIMO channels with 0.5 correlation, the probability of having $\lambda_{\min} < -10dB$ can be as high as 30%. This can lead to significant inaccuracy.

For better accuracy, parameters a, b and c need to be specified with finer granularity.

Inaccuracies in MMIB (2)

Consider the following example for the channel matrix, H

$$(H) = \begin{bmatrix} -0.9683 + 0.0706i & -0.0317 + 0.0003i; \\ 0.1129 - 0.2085i & -0.0009 - 0.0155i; \end{bmatrix}$$


From equation (63), (64) and (65), the MMIB of the MIMO symbol is

$$[\gamma(1), \gamma(2), \gamma(3)] = \text{sort}_{asc} \{ \lambda_{\max} p_a + \lambda_{\min} (1 - p_a), \lambda_{\min} p_a + \lambda_{\max} (1 - p_a), \lambda_{\max} (1 - 2\sqrt{p_a(1-p_a)}) + \lambda_{\min} (1 + 2\sqrt{p_a(1-p_a)}) \}$$

$$QPSK: I_2^{(2 \times 2)}(\lambda_{\min}, \lambda_{\max}, p_a) = \frac{1}{2} J(a\sqrt{\gamma(1)}) + \frac{1}{2} J(b\sqrt{\gamma(2)}), \quad a = 0.85, b = 1.19$$

$$16QAM / 64QAM: I_m^{(2 \times 2)}(\lambda_{\min}, \lambda_{\max}, p_a) = \frac{1}{3} [J(a\sqrt{\gamma(1)}) + J(b\sqrt{\gamma(2)}) + J(c\sqrt{\gamma(3)})]$$



It can be seen that MMIB does not satisfy the basic property that the bit-level information metric should decrease with increasing modulation level.

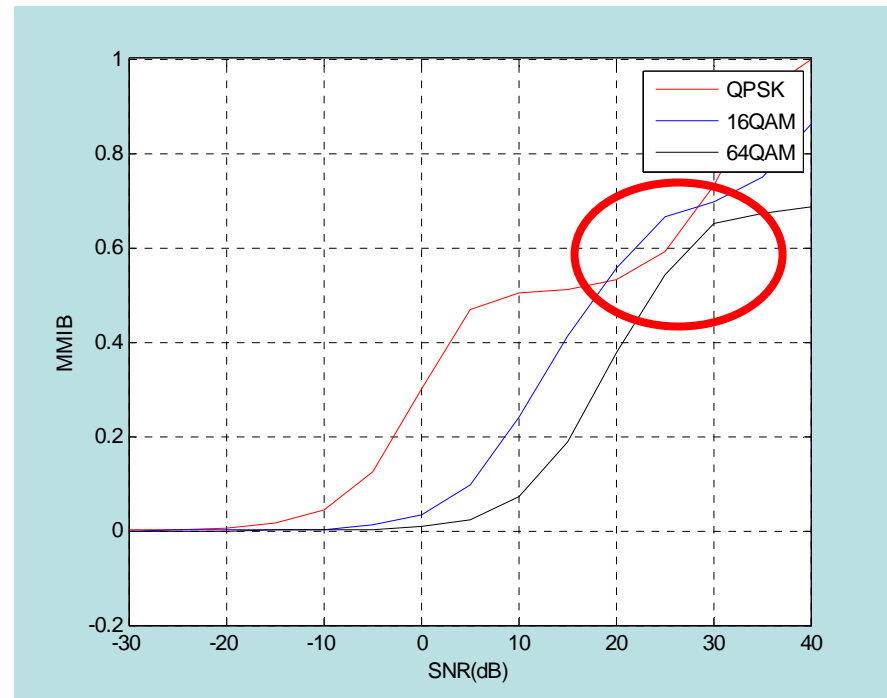

Inaccuracies Between MMIB and True MI (3)


16QAM MMIB vs. RBIR SNR=10dB

64QAM MMIB vs. RBIR SNR=10dB

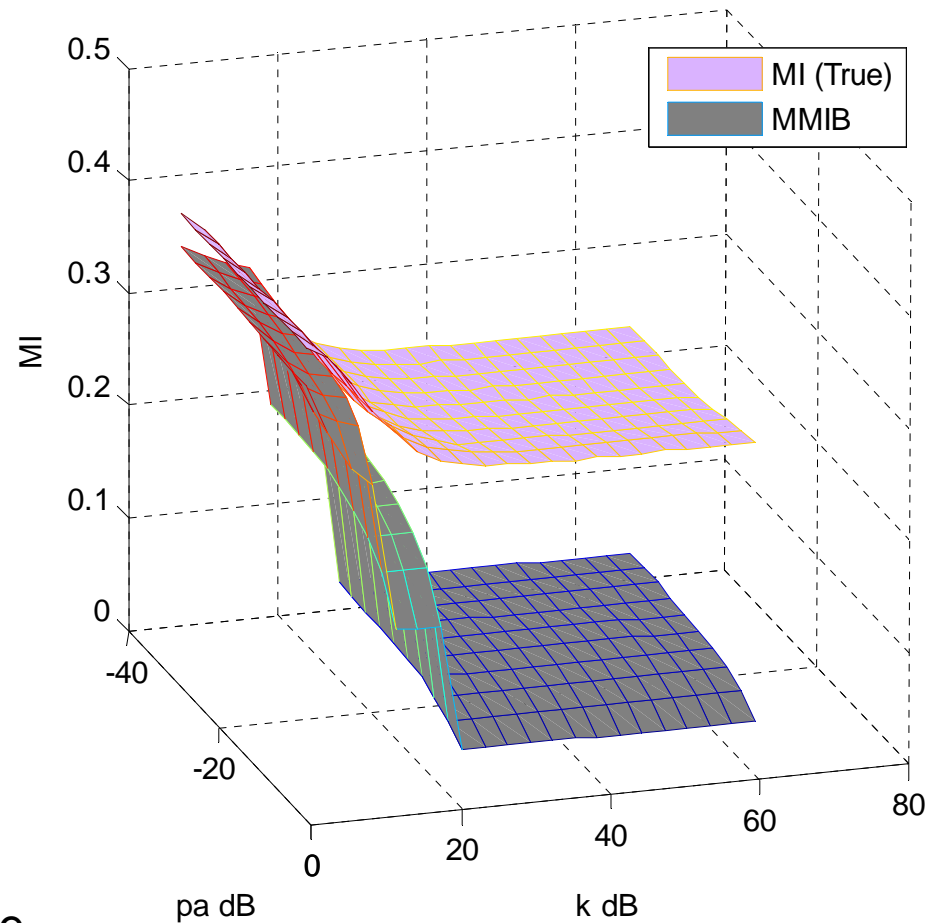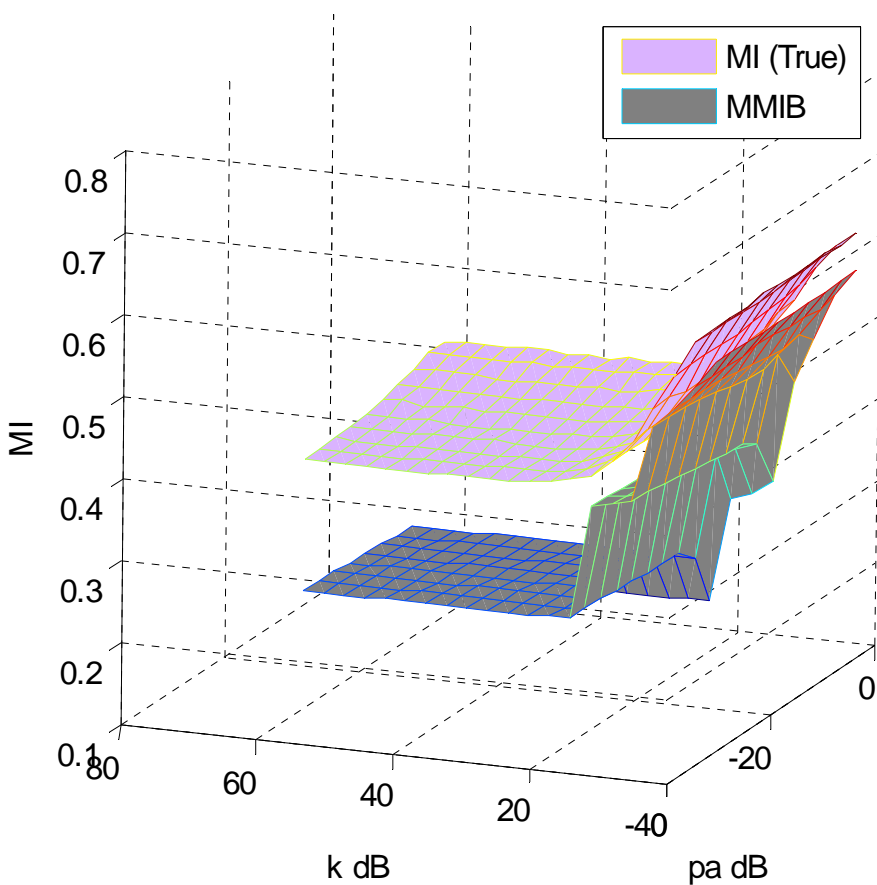

- MMIB PHY abstraction is inaccurate
- Different offsets may be needed for different k/pa and MCS levels

Inaccuracies in MMIB (4)

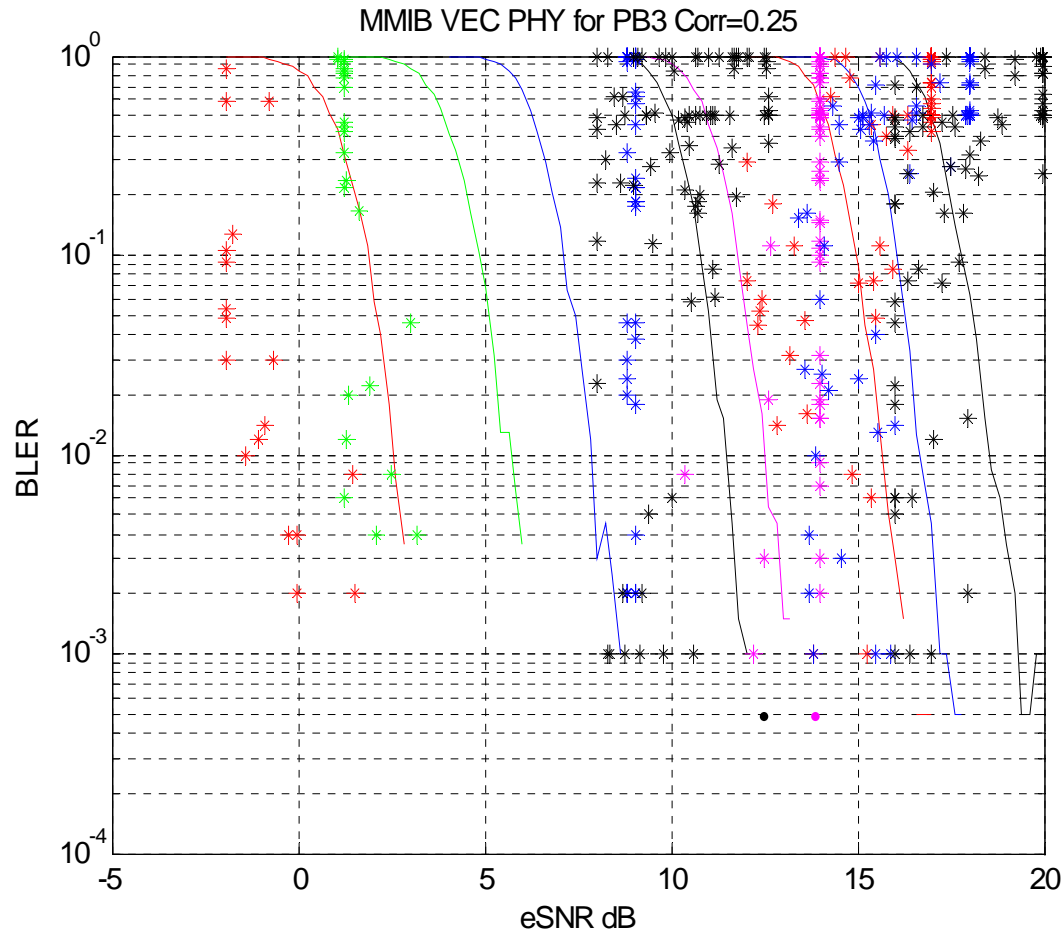

- MMIB PHY abstraction is inaccurate, especially for higher MCS levels
- Each MCS may need different offset

