

# Proposal for IEEE 802.16m UL Access and Resource Request Channels

Document Number: IEEE C802.16m-08/352r1

Date Submitted: 2008-05-12

## Source:

Robert Novak, Mo-Han Fong, Sophie Vrzic, Dongsheng Yu, Jun Yuan, Hang Zhang, Sang-Youb Kim, Kathiravetpillai Sivanesan

Nortel Networks

E-mail: [rnovak@nortel.com](mailto:rnovak@nortel.com), [mhfong@nortel.com](mailto:mhfong@nortel.com)

\*<http://standards.ieee.org/faqs/affiliationFAQ.html>>

Re: IEEE 802.16m-08/016r1 – Call for Contributions on Project 802.16m System Description Document (SDD), on the topic of “Uplink Control Structures”

Purpose: Adopt the proposal into the IEEE 802.16m System Description Document

## Notice:

*This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the “Source(s)” field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.*

## Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE’s name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE’s sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

## Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and <http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <http://standards.ieee.org/board/pat/pat-material.html>> and <http://standards.ieee.org/board/pat>>.

# Scope

- This contribution proposes UL Initial/handover access, and resource request/renewal channels for IEEE 802.16m


# Introduction

- The following aspects of UL control channels for access and resource requests are proposed in this contribution:
  - Initial access and handover access to system
  - Resource request
  - Trigger continuation (renewal) of negotiated service
  - Allocation re-configuration header
- Other types of UL control channels and control structure for non-random access signaling are given in contribution C802.16m-08/351 or latest version.

# UL Resource Used for Different Types of Signaling

UL resource	Contention based Random Access Region	Non-Contention based Random Access Region	MS specific UL control resources	MAC header sent in conjunction with UL traffic
Signaling types	<ul style="list-style-type: none"> <li>• Initial access</li> <li>• Handover access</li> <li>• Resource renewal request</li> </ul>	<ul style="list-style-type: none"> <li>• Periodic ranging</li> </ul>	<ul style="list-style-type: none"> <li>• Resource request</li> <li>• Resource renewal request</li> </ul>	<ul style="list-style-type: none"> <li>• Resource request</li> <li>• Resource renewal request</li> <li>• Additional service requirements/requests</li> </ul>

# MS Access and UL Resource allocation Flow

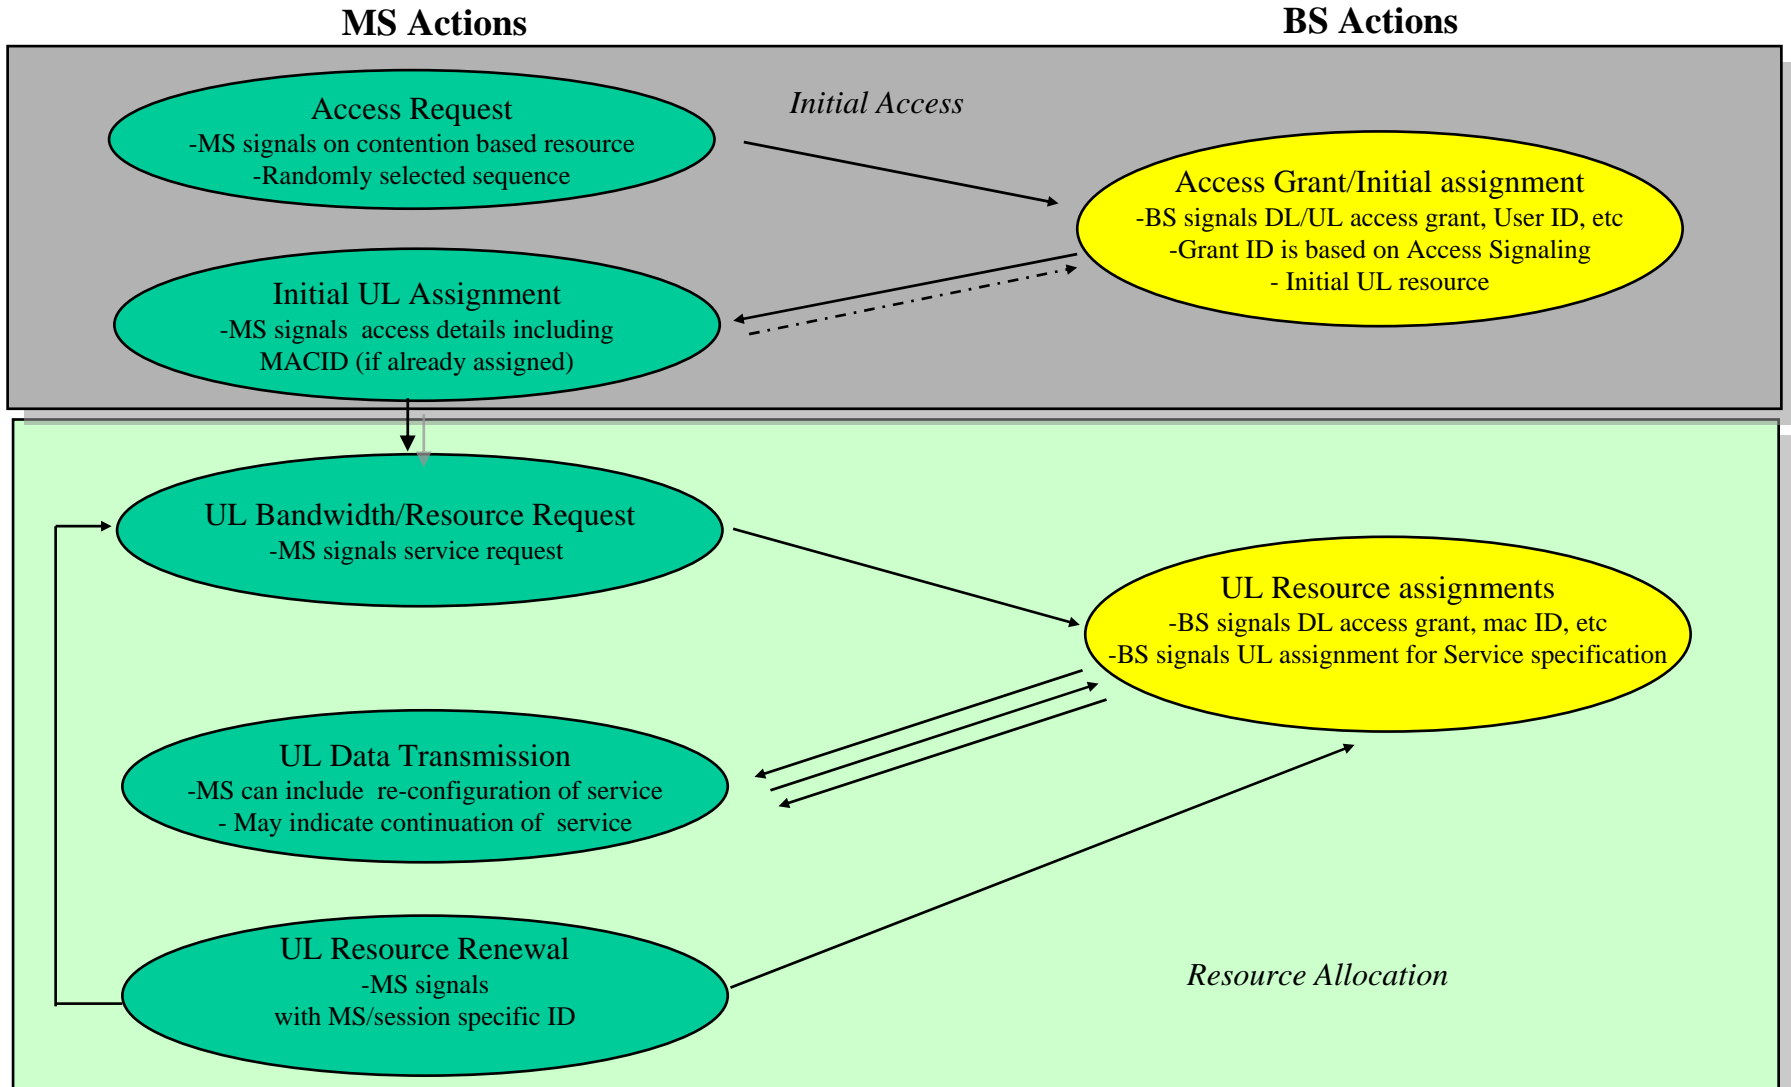

# Overview of Random Access

- Define two different regions:
  - Contention based region for random access for bandwidth/resource request, initial access and handover access.
    - An MS picks a random index which is associated with a random location within the region and a random sequence (e.g. m-sequence).
    - Bandwidth/resource request for bandwidth/resource renewal using pre-assigned region and code.
  - Non-contention based and is pre-assigned periodic ranging region to each MS for MS that does not have dedicated UL control channel(s) assigned
    - Base station assigns MS sequence and periodic locations within the region for ranging

# Overview of Access/Request Channel Structure

- Initial access channel (ACH)
  - Located in a defined resource for contention based signaling within each frame
  - For initial access and handover access
- Resource request channel (RRCH)
  - Resource request :
    - Located in MS specific UL resources
  - Resource renewal request:
    - Located in a defined resource for contention based signaling within each frame
    - Located in MS specific UL resources

# Initial Access Channel


- The mobile attempts to access the system. At this point the mobile has already synchronized with a serving sector. Access to the system may provide the mobile with a User ID, and allow the user to receive resource allocations (UL and/or DL) from the base station.
- The access channel (ACH) is used for the user to initially access the system.
- A mobile randomly selects a ACH signaling ID. An ACH signaling ID uniquely identify the spreading sequence, time-frequency location, and sub frame.
  - The set of signaling ID options are known to users, and also the index associated with each signaling ID option.
- When BS receives the transmission from MS on the ACH,, the base station assigns the following:
  - An UL Control message
    - The FL control segment message sent to the MS from the BS identifies the MS based on the randomly selected ACH signaling ID option selected by the MS for initial access.
    - A user ID to the user (embedded in UL control channel)
    - Resource allocation for mobile to begins communicating capabilities, resource request, etc
  - The base station can further give a DL resource assignment requesting information from the mobile, and additional details



# UL Initial Access Channel

## (1/2)

- UL random access channel is a contention based channel for multiple MSs to gain initial access
  - A designated resource is allocated for initial access
  - The request is spread across the  $N$  resources tiles (e.g.  $N = 3$ ) used for Initial access
  - Spread in frequency domain over OFDM resources allows for frequency diversity
  - Spreading length over  $N$  resources is  $L$
- Selection of access channel signaling ID:
  - The MS randomly selects from one sequence  $L$  sequences
  - The MS randomly selects from  $M$  locations within the subframe, and  $F$  subframes (eg. A, B, C etc)
- The number of distinct codes/resource/subframes per subframe is  $N = LMF$ .  $M$  and  $F$  are configurable by the base station

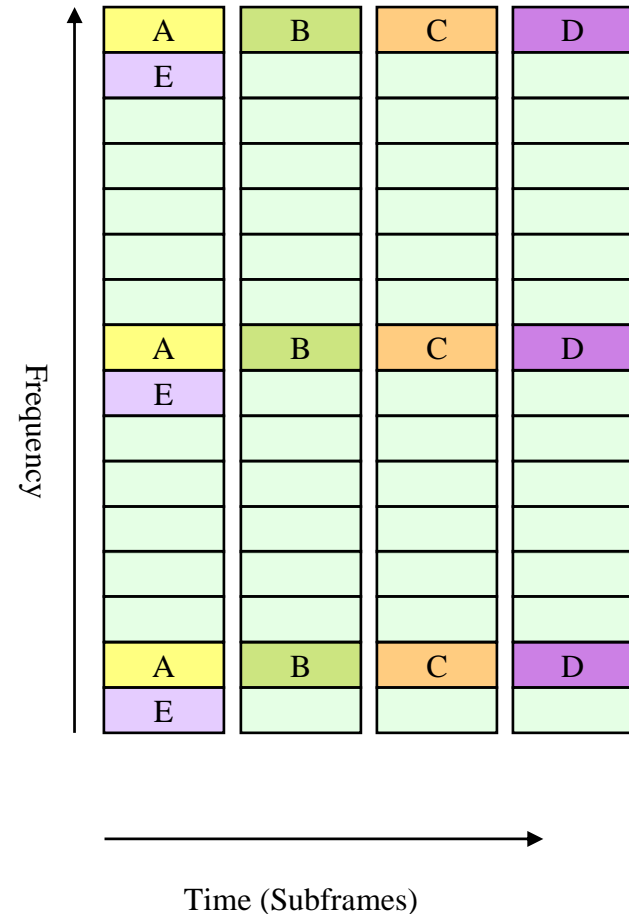

# UL Initial Access Channel

## (2/2)

- Sequences are scrambled by sector ID and access/request type
  - For Initial access channel, the access type specifies whether an MS has already been assigned a User ID, such as user in handoff
- Sequences are FFS.

# UL Resource Request (1/2)

- The MS sends a resource request requires to obtain an uplink resource allocation. Two types of UL resource requests are defined:
  1. Resource renewal request. An indication is sent to the base station specifying that the MS requires a resource assignment.
    - The BS responds with an allocation of a preconfigured resource assignment, and continuation of an existing service, or a default allocation.
    - The further configuration of the resource request can be specified in a MAC message embedded in the transmissions
    - Indication occurs using assigned random access signaling ID's
    - Can also be sent on the user specific UL resources

# UL Resource Request (1/2)

## 2. Resource request

- An message is sent to the base station specifying that the MS requires a resource assignment along with some parameters of the assignment (delay constraints, QoS, packet backlog, resource size, etc)
  - This message is sent on the user specific UL control resources
- 
- The mobile can choose the form (and location) of the message
    - In some cases, if the mobile's assigned UL control resources may occur infrequently
  - Sequences are scrambled by sector ID and access/request type
    - For resource request channel, the request type specifies a request for a pre-configured service or assignment.

# UL Resource Request on MS specific UL Control Resource (1/1)

- In basic operation, the request by the mobile for UL resources is made on resources within UL control tiles
- The UL control resources are specified persistently for each MS (see contribution IEEE C80216m-08/351 or latest version for further details)
  - These resources sizes may be different for different frames according to a pre-determined pattern. This sizes are known at the mobile and base station and do not need to be signaled after configuration
- The resource request occupies a field provisioned for some other message (CQI, ACK/NAK, precoder index etc).
  - The presence of a request is specified by the UL control message type.
  - The mobile sets this type to a message configuration that includes space for a resource assignment. Therefore, the size of the message is not changed from the specified size for that subframe.
  - The presence of the request field is dynamic, but does not affect the pre-determined size of the user's UL control.
- Resource request is encoded with other UL control data for user so that resource request can be reliably received

# UL Resource Request on MS specific UL Control Resource (2/2)

- Two types of resource requests are specified dynamically by control message type:
  - Resource renewal request: continuation or renewal of existing or configured allocation
    - Low impact or messages “replaced” in UL assignment
  - Resource request: containing further details of the resource request
    - delay constraints, QoS, packet backlog, resource size, etc are indicated
    - Further details of assignment can be given in a re-configuration message, or known from previous or default configurations.

# UL Resource Allocation and Re-Configuration via MAC Header

- After a mobile has been assigned a UL resource, assignment can be further configured through additional MAC message encoded with data packet
  - Parameters for first transmission are specified by BW request, set to default based on capability negotiation, set to previous configuration based on renewal, or set in some other manner
  - The mobile can change the assignment parameters by including additional re-configuration message encoded with data, to take effect at the start of the next packet transmission
    - Takes advantage of HARQ for this control message
- ACK/NAK of packet transmission provides mobile with indication that re-configuration message was correctly received

# Summary

- Channels for initial access and resource requests are proposed.
- Resources request are defined allowing for different amounts of information, and different urgencies in the request
  - Resource renewal requests may use random access channels or UL control resources.
    - Multiplexing of initial access and resource requests regions is FFS.
  - Resource requests are multiplexed with UL control



# Proposed SDD Text (1/2)

## 11.x. UL Control

### 11.x.x UL Access and Allocation

*[Add content of slides 4 and 5 to this section]*

#### 11.x.x.1 Initial Access

Initial access uses a contention based resource.

*[Add figure of slide 9 to this section]*

#### 11.x.x.2. Resource Request Renewal

Resource renewal request uses a contention based resource. The signaling is sent over a set of resource tiles, which are distributed in frequency . A IEEE 802.16m mobile is assigned a specific sequence and location for requests.

# Proposed SDD Text (2/2)

## 11.x.x.3. Periodic Ranging

Periodic ranging uses a non-contention based resource. The signaling is sent over a set of resource tiles, which are distributed in frequency. A IEEE 802.16m mobile is assigned a specific sequence, and periodic location.

## 11.x.y. UL Dedicated Control Channel

### 11.x.y.y Resource request

An IEEE 802.16m mobile can use UL control resources to send a resource request. The mobile can indicate that the UL control message contains a resource request by the message type.

A resource renewal request is also supported in the UL dedicated control channel.