

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	Correction to Rx SNR, Rx sensitivity, and Tx Relative Constellation Error for OFDM and OFDMA systems.	
Date Submitted	<b>2005-09-22</b>	
Source(s)	Darcy Poulin [SiGe Semiconductor], Paul Pigginn [Cygnus Communications], Ran Yaniv [Alvarion], Dov Andelman [Intel]	Voice: [613-820-9244 x274] Fax: [Fax Number] <a href="mailto:dp@sigecom.com">[dp [at] sigecom.com]</a> , <a href="mailto:ppigginn@cygnuscom.com">ppigginn [at] cygnuscom.com]</a>
Re:	IEEE P80216_Cor1_D4	
Abstract	Correction to Rx SNR, Rx sensitivity, and Relative Constellation Error for OFDM and OFDMA systems.	
Purpose	The Rx SNR values in 802.16-2004 are incorrect. As a result, relative constellation error (EVM) and Rx sensitivity are also in error. In addition, there are many inconsistencies throughout section 8.3, 8.4, and 12.4 specifying EVM and Rx SNR. This submission attempts to resolve these inconsistencies.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

## **Introduction**

The current 802.16-2004 standard derives the Rx sensitivity based on the SNR of an ideal receiver needed to achieve a BER of  $1e-6$  in AWGN. It takes this ideal Rx SNR, then adds 5 dB for implementation loss and 7 dB for the receiver noise figure. Finally, it accounts for the channel bandwidth. The SNR of the ideal receiver is incorrect; it is approximately 3.4 dB higher than it should be, so the required sensitivity is 3.4 dB higher (easier to meet) than it should be. We wish to correct these errors in SNR, and hence errors in Rx sensitivity.

There is also a problem with the Tx relative constellation error (EVM). The Tx EVM was initially defined to be 10 dB lower than the Rx SNR so that the overall link SNR would not degrade more than 0.5 dB due to the transmitter. Since EVM is tied to the receive SNR, then the errors in Rx SNR have also resulted in an error in required Tx EVM. We wish to correct required Tx EVM so that it is consistent with the corrected Rx SNR.

In addition, there are a number of inconsistencies in the 802.16-2004 standard in specifying Tx EVM requirements. For example, table 264 (OFDM-PHY) specifies that the Tx EVM for 64-QAM-3/4 must be -31 dB. Table 336 (OFDMA-PHY) specifies that the EVM must be -31.4. Table 413 (minimum performance requirement for OFDMA in the Systems Profiles chapter) calls for a minimum EVM of -34.4 dB. As part of this submission, we will correct all of these inconsistencies.

Finally, we are therefore proposing that the Tx EVM be capped at -30 dB for subscriber stations, and -31 dB for base stations.

## 1.0 Discussion of Rx SNR and relative constellation Error for OFDM

The Rx SNR in the 802.16-2004 standard for OFDM is incorrect. The correct values for an ideal OFDM receiver, in order to decode OFDM with a BER of  $1e-6$  in AWGN can be found in an earlier submission by Tal Kaitz and Naftali Chayat in C80216d-03\_44. The correct values are approximately 3.4 dB lower than they are in Table 266 of the current 802.16-2004 standard. This correction was also noted in 80216-03\_18r12, comment 151. This comment was accepted, but the change to the Rx SNR table was not implemented due to an editorial error. To show this, note that P802\_16d\_D3 (Sept 3, 2003), table 212, shows the corrected Rx SNR values. The next version of the draft, P80216-REVD\_D1.pdf (Sept 27, 2003) shows the incorrect values for Rx SNR again. The fact that this was simply an editorial error was discovered after tracking through the commentary files used to generate both versions of the draft standard.

As a result of this error, the Rx sensitivity is incorrect, since sensitivity is derived wholly from the required Rx SNR. The sensitivity is given by equation 98 in section 8.3.11.1. It is calculated assuming that there is a 5 dB implementation loss (which includes non-ideal receiver effects such as channel estimation errors, tracking errors, quantization errors, and phase noise) and a 7 dB noise figure. As a result of this error, the sensitivity will be about 3.4 dB lower (harder to achieve) when these corrections are applied. In order to partially offset the fact that the sensitivity is being made 3.4 dB harder to achieve, we are proposing that the allowed noise figure be increased from 7 dB to 8 dB. For example, the sensitivity for a 3.5MHz channel bandwidth with 64QAM-3/4 is currently -72.6 dBm. When the correct value for the receiver SNR is applied with an 8 dB noise figure, this value becomes -75 dBm.

The transmitter relative constellation error (EVM) must also be changed as a result of this error correction. The Tx EVM is computed so that it is 10 dB below the Rx SNR (not including implementation loss). This is done to ensure that the transmitter has minimal effect on the overall link. For example, for 16QAM-1/2, the Rx SNR is 11.5 dB. Therefore, the required Tx EVM will be  $-(11.5 + 10) = -21.5$  dB, and the Tx EVM only degrades the overall SNR by 0.4 dB (the 11.5 dB SNR will be degraded to an SNR of 11.1 dB when the transmitted signal with a EVM of -21.5 dB is applied).

For subscriber stations, we are also proposing that we cap the EVM at -30 dB. Applying a cap at -30 dB means that for the worst case 64QAM-3/4 modulation, the transmitter will degrade the overall SNR by 1.5 dB.

For base stations, we will not put a cap on EVM, so it remains at -31 dB. This will result in a worst case degradation of the SNR of 1.2 dB for 64QAM-3/4.

To summarize:

SS EVM = BS SNR + 10 dB.

This is capped at -30 dB.


BS EVM = SS SNR + 10 dB

By capping the SS EVM at -30 dB, this will allow SS radios to use lower cost, and less complex radios and amplifiers. We also note that a 5 dB implementation loss is very conservative. We anticipate that SS and BS

vendors will achieve implementation losses significantly better than this, and this will improve the overall link SNR.

## 2.0 Discussion of Rx SNR and Tx Relative Constellation Error for OFDMA

The Rx SNR in the 802.16-2004 standard for OFDMA is incorrect. The correct values for an ideal OFDMA receiver, in order to decode OFDMA with a BER of  $1e-6$ , can be derived from **Figure 1**.

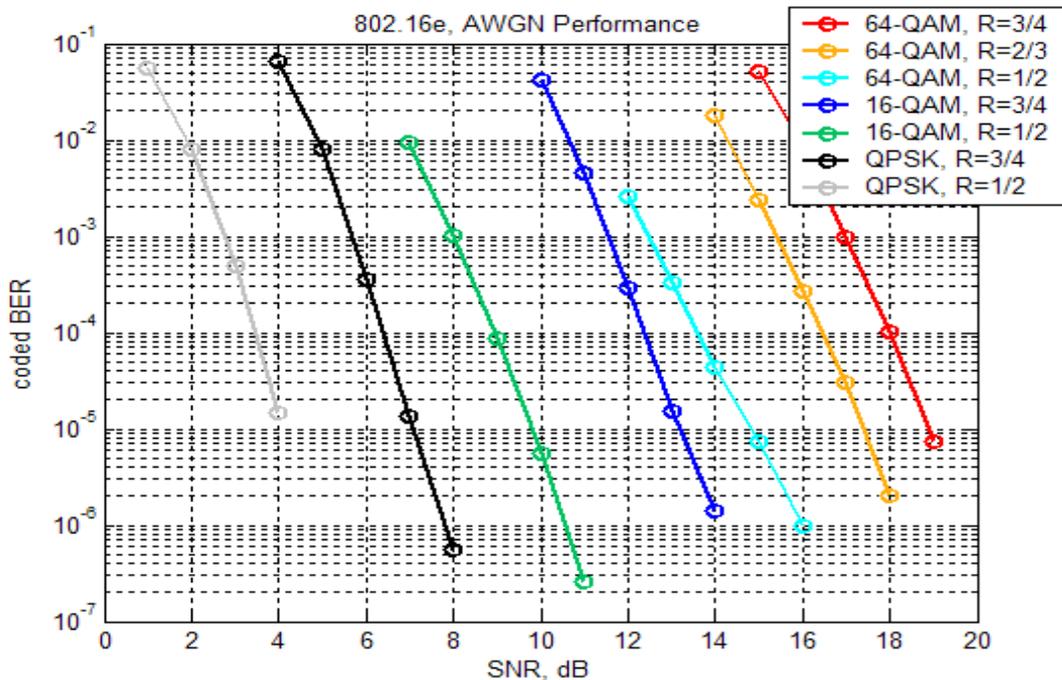

**Figure 1: Theoretical BER for OFDMA in AWGN**

The correct values of Rx SNR are approximately 4.4 dB lower than they are in Table 338 of the current 802.16-2004 standard.

As a result of this error, the Rx sensitivity is incorrect, since sensitivity is derived wholly from the required Rx SNR. It is calculated assuming that there is a 5 dB implementation loss (which includes non-ideal receiver effects such as channel estimation errors, tracking errors, quantization errors, and phase noise) and a 7 dB noise figure. As a result of this error, the sensitivity will be about 4.4 dB lower (harder to achieve) when these corrections are applied. In order to partially offset the fact that the sensitivity is being made 4.4 dB harder to achieve, we are proposing that the noise figure be increased from 7 dB to 8 dB. For example, the sensitivity for a 3.5MHz channel bandwidth with 64QAM-3/4 is currently -72.6 dBm. When the correct value for the receiver SNR is applied with a 9 dB noise figure, this value becomes -76 dBm.

The transmit relative constellation error (EVM) must also be changed as a result of this error correction. The Tx EVM is computed so that it is 10 dB below the Rx SNR (not including implementation loss). This is done to ensure that the transmitter has minimal effect on the overall link. For example, for 16QAM-1/2, the Rx SNR is 10.5 dB. This means that the required Tx EVM will be  $-(10.5 + 10) = -20.5$  dB. At this level, the Tx EVM only

degrades the overall SNR by 0.4 dB (the 10.5 dB SNR will be degraded to an SNR of 10.1 dB when the transmitted signal with an EVM of -20.5 dB is applied).

To summarize:

SS EVM = BS SNR + 10 dB

BS EVM = SS SNR + 10 dB

**Editorial direction for corrections to 802.16-2004:**

*In section 8.3.10.1.2 (page 102, line 30) make the following editorial changes to the table.*

**8.3.10.1.2 Transmitter constellation error and test method**

Table 264- Allowed relative constellation error versus data rate

Burst type	Relative Constellation Error <u>for SS</u> (dB)	<u>Relative Constellation Error for</u> <u>BS (dB)</u>
BPSK-1/2	-13	<u>-13</u>
QPSK-1/2	-16	<u>-16</u>
QPSK-3/4	-18.5	<u>-18.5</u>
16QAM-1/2	-21.5	<u>-21.5</u>
16QAM-3/4	-25	<u>-25</u>
64QAM-2/3	<del>-28.5</del> <u>-29</u>	<u>-29</u>
64QAM-3/4	<del>-31.0</del> <u>-30</u>	<u>-31</u>

In section 8.3.11.1 (page 102, line 51) make the following editorial changes.

### 8.3.11.1 Receiver sensitivity

The BER measured after FEC shall be less than  $10^{-6}$  at the power levels given by Equation (98) for standard message and test conditions. If the implemented bandwidth is not listed, then the values for the nearest smaller listed bandwidth shall apply. The minimum input levels are measured as follows:

- Using the defined standardized message packet formats, and
- Using an AWGN channel.

The receiver minimum input level sensitivity ( $R_{SS}$ ) shall be (assuming 5 dB implementation margin and ~~7~~8 dB Noise Figure):

$$R_{SS} = \del{-102}\u{-101} + SNR_{RX} + 10 \log (F_S * N_{used} / N_{FFT} * N_{subchannels} / 16) \quad (98)$$

where

$SNR_{RX}$  the receiver SNR as per Table 267 in dB

$F_S$  sampling frequency in MHz as defined in 8.3.2.2

$N_{subchannels}$  the number of allocated subchannels (default 16 if no subchannelization is used)

Table 266: Receiver SNR assumptions

Modulation	Coding rate	Receiver SNR (dB)
BPSK	1/2	<del>6.4</del> <u>3</u>
QPSK	1/2	<del>9.4</del> <u>6</u>
	3/4	<del>11.2</del> <u>8.5</u>
16QAM	1/2	<del>16.4</del> <u>11.5</u>
	3/4	<del>18.2</del> <u>15</u>
64QAM	2/3	<del>22.7</del> <u>19</u>
	3/4	<del>24.4</del> <u>21</u>

Note that these SNR values are derived in an AWGN environment, and assume that Reed-Solomon convolutional coding (RS-CC) is used.

In section 12.3.2 (page 243, line 2) make the following editorial changes to the table. Note this is one row in the table with a split to consider BS and SS requirements.

### 12.3.2 WirelessMAN-OFDM and WirelessHUMAN(-OFDM) Physical Layer Profiles

Table 404 – Minimum Performance basic requirements

Capability	Minimum performance	
Tx relative constellation error:	<u>SS</u>	<u>BS</u>
BPSK-1/2	≤ -13 dB	≤ -13 dB
QPSK-1/2	≤ -16 dB	≤ -16 dB
QPSK-3/4	≤ -18.5 dB	≤ -18.5 dB
16QAM-1/2	≤ -21.5 dB	≤ -21.5 dB
16QAM-3/4	≤ -25.0 dB	≤ -25 dB
64QAM-2/3	≤ <del>-28.5dB</del> -29 dB	≤ -29 dB
64QAM-3/4	≤ <del>-31dB</del> -30.0dB	≤ -31 dB

In section 8.4.12.3 (page 195, line 61) make the following editorial changes to the table.

#### 8.4.12.3: Transmitter constellation error and test method

Table 336-Allowed relative constellation error versus data rate

Burst type	Relative Constellation Error <u>for</u> <u>SS</u> (dB)	<u>Relative Constellation Error for</u> <u>BS</u> (dB)
QPSK-1/2	<del>-16.4</del> <u>-15</u>	<u>-15</u>
QPSK-3/4	<del>-18.2</del> <u>-18</u>	<u>-18</u>
16QAM-1/2	<del>-23.4</del> <u>-20.5</u>	<u>-20.5</u>
16QAM-3/4	<del>-25.2</del> <u>-24</u>	<u>-24</u>
<u>64QAM-1/2</u>	<u>-26</u>	<u>-26</u>
64QAM-2/3	<del>-29.7</del> <u>-28</u>	<u>-28</u>
64QAM-3/4	<del>-31.4</del> <u>-30</u>	<u>-30</u>

In section 8.4.13.1 (page 198, line 17) make the following editorial changes.

#### 8.4.13.1: Receiver sensitivity

The BER measured [after FEC](#) shall be less than  $10^{-6}$  at the power levels ~~shown in Table 337~~ [given by Equation \(xxxxy\)](#) for standard message and test conditions. ~~If the implemented bandwidth is not listed, then the values for the nearest smaller listed bandwidth shall apply.~~ The minimum input levels are measured as follows:

- Using the defined standardized message formats, and
- Using an AWGN channel.

~~Table 337—Receiver minimum input level sensitivity (dBm)~~

Bandwidth (MHz)	QPSK		16-QAM		64-QAM	
	1/2	3/4	1/2	3/4	2/3	3/4
1.5	-91	-89	-84	-82	-78	-76
1.75	-90	-87	-83	-81	-77	-75
3	-88	-86	-81	-79	-75	-73
3.5	-87	-85	-80	-78	-74	-72
5	-86	-84	-79	-77	-72	-71
6	-85	-83	-78	-76	-72	-70
7	-84	-82	-77	-75	-71	-69
10	-83	-81	-76	-74	-69	-68
12	-82	-80	-75	-73	-69	-67
14	-81	-79	-74	-72	-68	-66
20	-80	-78	-73	-71	-66	-65

~~Table 337 (as well as Table 336) are derived assuming 5 dB implementation loss, a Noise Figure of 7 dB and receiver SNR and Eb/N0 values as listed in Table 338.~~

The receiver minimum sensitivity level,  $R_{SS}$ , is derived according to the following equation:

$$R_{SS} = -114 + SNR_{Rx} - 10 \cdot \log_{10}(R) + 10 \log_{10}(F_s \cdot N_{used} / N_{FFT}) + ImpLoss + NF \quad (\text{eq. xxxxy})$$

Where:

$SNR_{Rx}$  = the receiver SNR as per table 338

$R$  = repetition factor, as described in section 8.4.9

$F_s$  = sampling frequency in MHz as defined in section 8.4.2.4

$ImpLoss$  = implementation loss, which includes non-ideal receiver effects such as channel estimation errors, tracking errors, quantization errors, and phase noise. The assumed value is 5 dB.

$NF$  = receiver noise figure, referenced to the antenna port. The assumed value is 8 dB.

Table 338-Receiver SNR ~~and Eb/No~~ assumptions

Modulation	<del>Eb/No</del> (dB)	Coding rate	Receiver SNR (dB)
QPSK	<del>10.5</del>	1/2	<del>9.4</del> <u>5</u>
		3/4	<del>11.2</del> <u>8</u>
16QAM	<del>14.5</del>	1/2	<del>16.4</del> <u>10.5</u>
		3/4	<del>18.2</del> <u>14</u>
64QAM	<del>19.0</del>	<u>1/2</u>	<u>16</u>
		2/3	<del>22.7</del> <u>18</u>
		3/4	<del>24.4</del> <u>20</u>

Note that these SNR values are derived in an AWGN environment, and assume that a tail-biting convolutional code (CC) is used.

*In section 12.4.3.1.5 (page 246, line 55) make the following editorial changes to the table. Note this is one row in the table with a split to consider BS and SS requirements.*

12.4.3.1.5 Minimum performance requirements

Table 413 – Minimum Performance basic requirements for all profiles

Capability	Minimum performance	
Tx relative constellation error:	<u>SS</u>	<u>BS</u>
QPSK-1/2	< <del>-19.4 dB</del> <u>-15 dB</u>	≤ <u>-15 dB</u>
QPSK-3/4	< <del>-21.2 dB</del> <u>-18 dB</u>	≤ <u>-16 dB</u>
16QAM-1/2	< <del>-26.4 dB</del> <u>-20.5 dB</u>	≤ <u>-20.5 dB</u>
16QAM-3/4	< <del>-28.2 dB</del> <u>-24 dB</u>	≤ <u>-24 dB</u>
<u>64QAM-1/2</u>	≤ <u>-26 dB</u>	≤ <u>-26 dB</u>
64QAM-2/3 (if 64-QAM supported)	< <del>-32.7 dB</del> <u>-28 dB</u>	≤ <u>-28 dB</u>
64QAM-3/4 (if 64-QAM supported)	< <del>-34.4 dB</del> <u>-30 dB</u>	≤ <u>-30 dB</u>

*In table 414, requirements of Tx relative constellation error are listed. These requirements are covered in table 413, and should be removed in table 414.*

*In section 12.4.3.2 (page 247, line 54) make the following editorial changes to the table.*

#### 12.4.3.2 WirelessMAN-OFDMA 1.25MHz channel basic PHY Profile

Table 414 – Minimum performance requirements for OFDMA\_ProfP1

Capability	Minimum performance
<del>Tx relative constellation error:</del>	
<del>QPSK-1/2</del>	<del>≤ -22.4 dB</del>
<del>16QAM-3/4</del>	<del>≤ -28.2 dB</del>