

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Enhancement of handoff capability and procedures	
Date Submitted	2004-05-17	
Source:	Wen Tong, Peiying Zhu, Jianglei Ma, Ming Jia, Hang Zhang and Mo-Han Fong, Nortel Networks 3500 Carling Avenue Ottawa, ON. K2H 8E9 CANADA	Voice: (613)-763-1315 Fax: (613)-765-7723 wentong@nortelnetworks.com
Re:	IEEE 802.16e D2 Draft	
Abstract	Enhancement of handoff capability and procedures	
Purpose	To incorporate the changes here proposed into the 802.16e D2 draft.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Enhancement of handoff capability and procedures

1 Background

In this contribution, two physical layer enhancements for the handoff operation are proposed for a frequency reuse-one OFDMA multi-cell system. These enhancements are based on the MIMO/MISO capabilities for both BS and MSS to exploit the macro-diversity. The first is joint BS soft-handoff based on the space time coding structure to enhance the user data rate in the very poor geometry users. The second is to allow the minimum data rate connection during the very low geometry handoff process. It should be noted that the proposed handoff solutions are also applicable to the MBS service.

2 MIMO Soft Handoff

MIMO-OFDMA soft handoff (SHO) scheme is configured with multiple BS transmissions in division in frequency domain, and the space-time coding (STTD/SM) associated with each BS antenna. The packet delivering to SHO MSS is duplicated to all the active SHO-BS. Two SHO transmission are allowed: (3-way SHO example)

1. *Joint* multiple BS transmission division in frequency domain.
 - Data packet is divided into three sub-packets, and each BS transmits one sub-packet, each BS organizes the space-time coding for two antennas and mapped onto OFDM time-frequency AMC sub-channel while 2/3 of the band is empty without signal transmission. Each transmitted AMC sub-channel is power boosted by $10\log_{10}(3)$ dB to realize the full power transmission. The MSS receives the entire frequency band and performs space-time decoding to retrieve the packet data.
 - The same data packet is space-time encoded by each BS, each BS's transmission is mapped into different AMC sub-channel in frequency domain. The 2/3 of the band is empty without signal transmission. Each transmitted AMC sub-band is power boosted by $10\log_{10}(3)$ dB. The MSS receives the entire frequency band and performs diversity combining for each sub-bands and space-time decoding to retrieve the packet data.
2. *Joint* multiple BS antenna space-time coding transmission division in frequency domain.
 - Data packet is divided into three sub-packets. BS-1 antenna α and BS-2 antenna β performs the space-time encoding for the 1st sub-packet; BS-2 antenna α and BS-3 antenna α performs the space-time encoding for the 2nd sub-packet; BS-3 antenna β and BS-1 antenna β performs the space-time encoding for the 3rd sub-packet. Each antenna pair transmits one sub-packet, i.e. mapped onto one OFDM time-frequency sub-band accordingly, see Figure 1, the 2/3 of the band is empty without signal transmission. Each transmitted sub-band is power boosted by $10\log_{10}(3)$ dB. The SS receives the entire frequency band and performs space-time decoding to retrieve the packet data.
 - Data packet is encoded by 3 versions of space-time coding combinations (i) BS-1 antenna α and BS-2 antenna β (ii) BS-2-antenna α and BS-3 antenna α (iii) BS-3 antenna β and BS-1 antenna β antenna. Each combination transmits the same data packet. Each antenna pair is mapped onto one OFDM time-frequency sub-band accordingly and the 2/3 of the band is empty without signal transmission. Each transmitted sub-band is power boosted by $10\log_{10}(3)$ dB. The MSS receives the entire frequency band and performs diversity combining for each sub-bands and space-time decoding to retrieve the packet data.

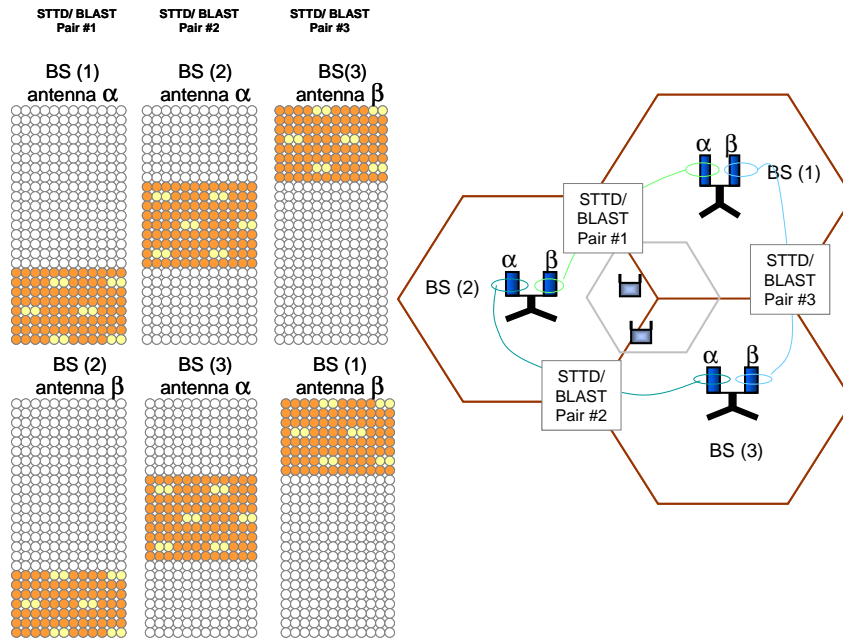


Figure 1 MIMO-soft-handoff

The MIMO-OFDMA soft-handoff is determined by the network and mapped onto AMC sub-channel. The AMC sub-channel allocation for SHO is scheduled in the round robin. Based on the same principle, the solution can be applied to the MSS with single antenna by employing 2x1 STTD.

2.1 Differential STC for non-coherent demodulation to improve the range

In the very low SNR level, the coherent reception of OFDM signal becomes very difficult due to unreliable channel estimation. In the case of limited link budget, the range is limited, in order to extend the range, in addition to the repetition coding, non-coherent demodulation will allow the reception of OFDM signal in the very low signal to noise level. We propose to introduce recursive type differential modulation for both MIMO and non-MIMO modes they are applicable to QPSK constellation. The STC code based differential modulation preserves fully the space-time coding gain, with only 3dB penalty compared to the coherent STC code. The encoding is

$$Z_i = \frac{1}{\sqrt{2}} Z_{i-1} X_i \quad \text{where} \quad X_i = \begin{bmatrix} x_1 & x_2 \\ -x_2^* & x_1^* \end{bmatrix}$$

and the element x_1, x_2, \dots is the input symbol. The decoding is

$$S_i = \frac{1}{\sqrt{2}} S_{i-1} Y_i$$

where Y_i is the receiver matrix stacked from the received signal vectors, as we can see, both

encoding and decoding is very simple. This is another advantage for the differential STC coding. The typical gain for differential can improve the range dramatically, even with single receive antenna for MSS.

2.2 Specific text changes

[Add the following text into section 8.4.9.2]

-----Start text proposal-----

[Additional differential modulations for MIMO, SISO and SIMO are listed in table zzz-1](#)

Table zzz-1 differential space time code for 1, 2 and 4 transmit antennas

<u>Antenna Configuration</u>	<u>Modulation Rule</u>	<u>X_i</u>
<u>1-transmit antenna</u>	<u>$Z_i = \frac{1}{\sqrt{2}} Z_{i-1} X_i$</u>	<u>Table xxx-2</u>
<u>2-transmit antenna</u>	<u>$Z_i = \frac{1}{\sqrt{2}} Z_{i-1} X_i$</u>	<u>$X_i = \begin{bmatrix} x_1 & x_2 \\ -x_2^* & x_1^* \end{bmatrix}$</u>
<u>4-transmit antenna</u>	<u>$Z_i = \frac{1}{\sqrt{2}} Z_{i-1} X_i$</u>	<u>$X_i = \begin{bmatrix} x_1 & x_2 & \frac{x_3}{\sqrt{2}} & \frac{x_3}{\sqrt{2}} \\ -x_2^* & x_1^* & \frac{x_3}{\sqrt{2}} & -\frac{x_3}{\sqrt{2}} \\ \frac{x_3^*}{\sqrt{2}} & \frac{x_3^*}{\sqrt{2}} & \frac{-x_1 - x_1^* + x_2 - x_2^*}{2} & \frac{x_1 - x_1^* - x_2 - x_2^*}{2} \\ \frac{x_3^*}{\sqrt{2}} & -\frac{x_3^*}{\sqrt{2}} & \frac{x_1 - x_1^* + x_2 + x_2^*}{2} & \frac{-x_1 - x_1^* - x_2 + x_2^*}{2} \end{bmatrix}$</u>

For single antenna transmission the input bit and symbol mapping is shown in Table zzz-2

Table zzz-2 $\pi/4$ -DQPSK modulation

<u>Codeword $b_0 b_1$</u>	<u>Modulation symbol X_i</u>
<u>00</u>	<u>1</u>
<u>01</u>	<u>j</u>
<u>11</u>	<u>-1</u>
<u>10</u>	<u>-j</u>

-----End text proposal-----