

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	A method of scanning neighbor BSs periodically	
Date Submitted	2004-06-07	
Source(s)	Kihyoung Cho, Yongho Kim, Changjae Lee LG Electronics, Inc. 533, Hogue-1dong, Dongan-gu, Anyang-shi, Kyongki-do, Korea	Voice: 82-31-450-2945 Fax: 82-31-450-7912 [mailto:kiyoung@lge.com, ronnykim@lge.com, cjlee16@lge.com]
Re:	This is a response to a Call for Comments IEEE802.16e Handover Adhoc.	
Abstract	In this contribution, a method of supporting periodic scanning is provided.	
Purpose	This document is submitted for review by 802.16e Working Group members	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

A method of scanning neighbor BSs periodically

Kihyoung Cho , Yongho(Ronny) Kim, and Changjae Lee

LG Electronics

1. Introduction

In current IEEE802.16e specification, handover procedure is defined to support the mobility of an MSS. The CINR is the main basis for either MSS or BS to determine handover. To provide reliable CINR information, an MSS should continuously measure CINR of the neighbor BSs and average the measured CINR for a given duration. The consecutive CINR measurement of an MSS is inevitable in all handover schemes such as soft handover and fast BS switching. However, in the current specification, the MSS should exchange SCN-REQ/RSP messages with the serving BS whenever the MSS tries to scan. So the frequent exchange of Scanning related messages cause too much overhead and result in wasting of bandwidth and battery power. Even though the Maximum Length of scan duration is defined to approximately $20\text{sec} (\approx 2^{12} \times 5\text{ms})$, this duration is too long for one scanning duration. Thus, in this contribution, we propose a method of enabling an MSS to scan neighbor BSs periodically to reduce the number of scanning request and response messages.

2. Proposed Changes

[Modify the Table 92e – MOB-SCN-REQ Message Format]

6.3.2.3.51 Scanning Interval Allocation Request (MOB-SCN-REQ) message

A MOB-SCN-REQ message may be transmitted by an MSS to request a scanning interval for the purpose of seeking neighbor BS, and determining their suitability as targets for HO.

An MSS shall generate MOB-SCN-REQ messages in the format shown in Table 92e:

Table 92e—MOB-SCN-REQ Message Format

Syntax	Size	Notes
MOB-SCN-REQ_Message_Format(){		
Management Message Type = 50	8 bits	
Scan Duration	12 bits	Units are frames
HMAC Tuple	21 bits	See 11.4.11
<u>Scan Period</u>	<u>X bits</u>	<u>Units are frames</u>
<u>Scan Iteration</u>	<u>Y bits</u>	
}		

The following parameters shall be included in the MOB-SCN-REQ message,

Scan Duration

Duration (in units of frames) of the requested scanning period.

HMAC Tuple (see 11.4.11 in IEEE Standard P802.16-REVd/D3-2004)

The HMAC Tuple Attribute contains a keyed Message digest (to authenticate the sender).

Scan Period

The period between scanning when MSS is required to scan neighbor BS periodically

Scan Iteration

The requested number of iterating scanning interval by an MSS

[Modify the Table 92f – MOB-SCN-RSP Message Format]

6.3.2.3.52 Scanning Interval Allocation Response (MOB-SCN-RSP) message

A MOB-SCN-RSP message shall be transmitted by the BS in response to an MOB-SCN-REQ message sent by an MSS. In addition, BS may send an unsolicited MOB_SCN_RSP. The message shall be transmitted on the basic CID.

The format of the MOB-SCN-RSP message is depicted in Table 92f.

Table 92f—MOB-SCN-RSP Message Format

Syntax	Size	Notes
MOB-SCN-RSP_Message_Format(){		
Management Message Type = 50	8 bits	
Scan Duration	12 bits	In frames
Start Frame	4 bits	
HMAC Tuple	21 bits	See 11.4.11
<u>Scan Period</u>	<u>X' bits</u>	
<u>Scan Iteration</u>	<u>Y' bits</u>	
<u>Report mode</u>	<u>2 bits</u>	<u>00 : no report</u> <u>01 : periodic report</u> <u>10 : event triggered report</u> <u>11 : reserved</u>
<u>Scan Report Period</u>	<u>Z bits</u>	<u>Available when the value of Scan Report is set to 01.</u>
}		

The following parameters shall be included in the MOB-SCN-RSP message:

Duration

Duration (in units of frames) where the MSS may scan for neighbor BS.

Start Frame

Measured from the frame in which this message was received. A value of zero means that it will start in the next frame.

HMAC Tuple (see 11.4.11 in IEEE Standard P802.16-REVd/D3-2004)

The HMAC Tuple Attribute contains a keyed Message digest (to authenticate the sender).

Scan Period

The period between scanning when MSS is required to scan neighbor BS periodically

Scan Iteration

The number of iterating scanning interval

Report mode

Action code for an MSS's report of CINR measurement

Scan Report Period


The period of MSS's report of CINR measurement when the MSS is required to report the value periodically

[Modify the Figure E.1– Example BS advertisement and scanning (without association) by MSS request]

E.1 Hand-over MSCs

E.1.1 Neighbors advertisement and scanning of neighbors

The following figures describes the messages flow for neighbors advertisement and scanning of neighbors by the MSS request, BS request and periodic scanning of neighbors during hand-over.

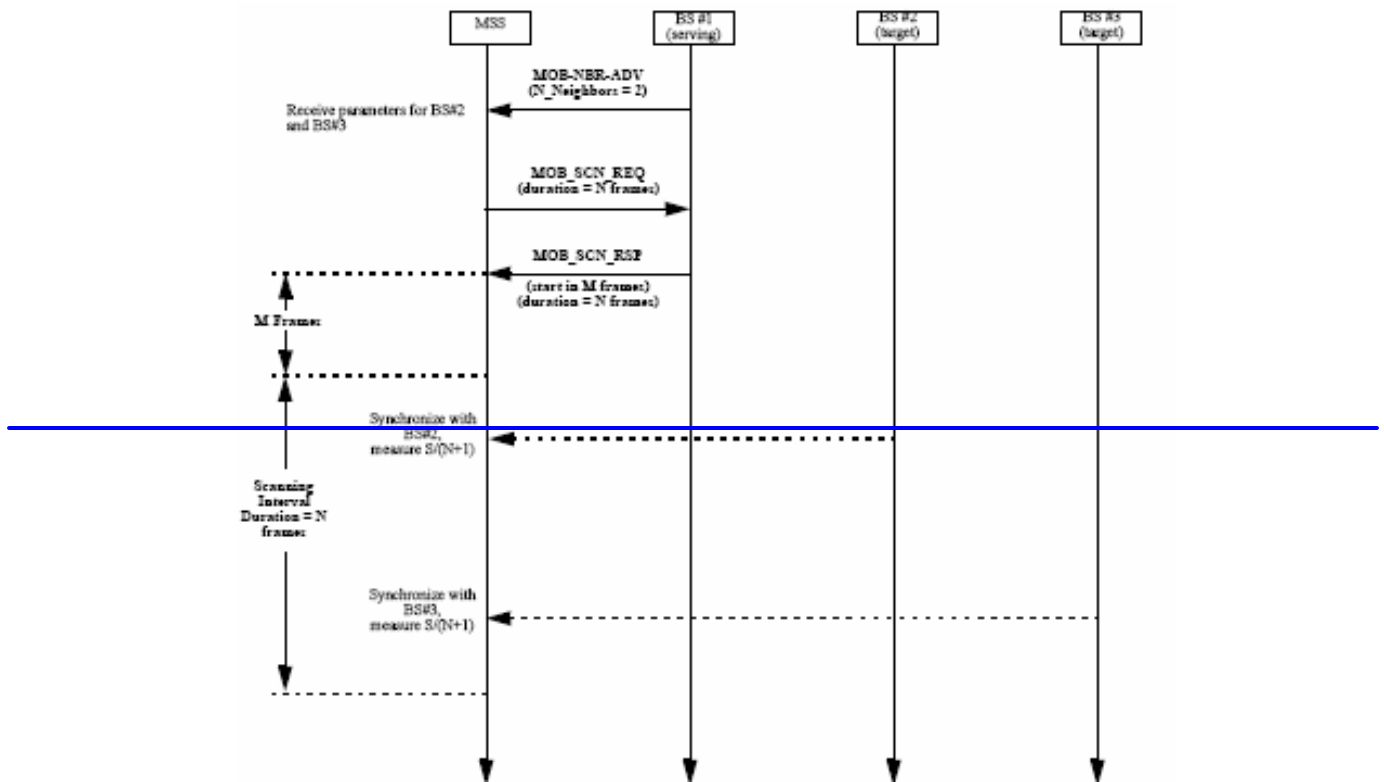

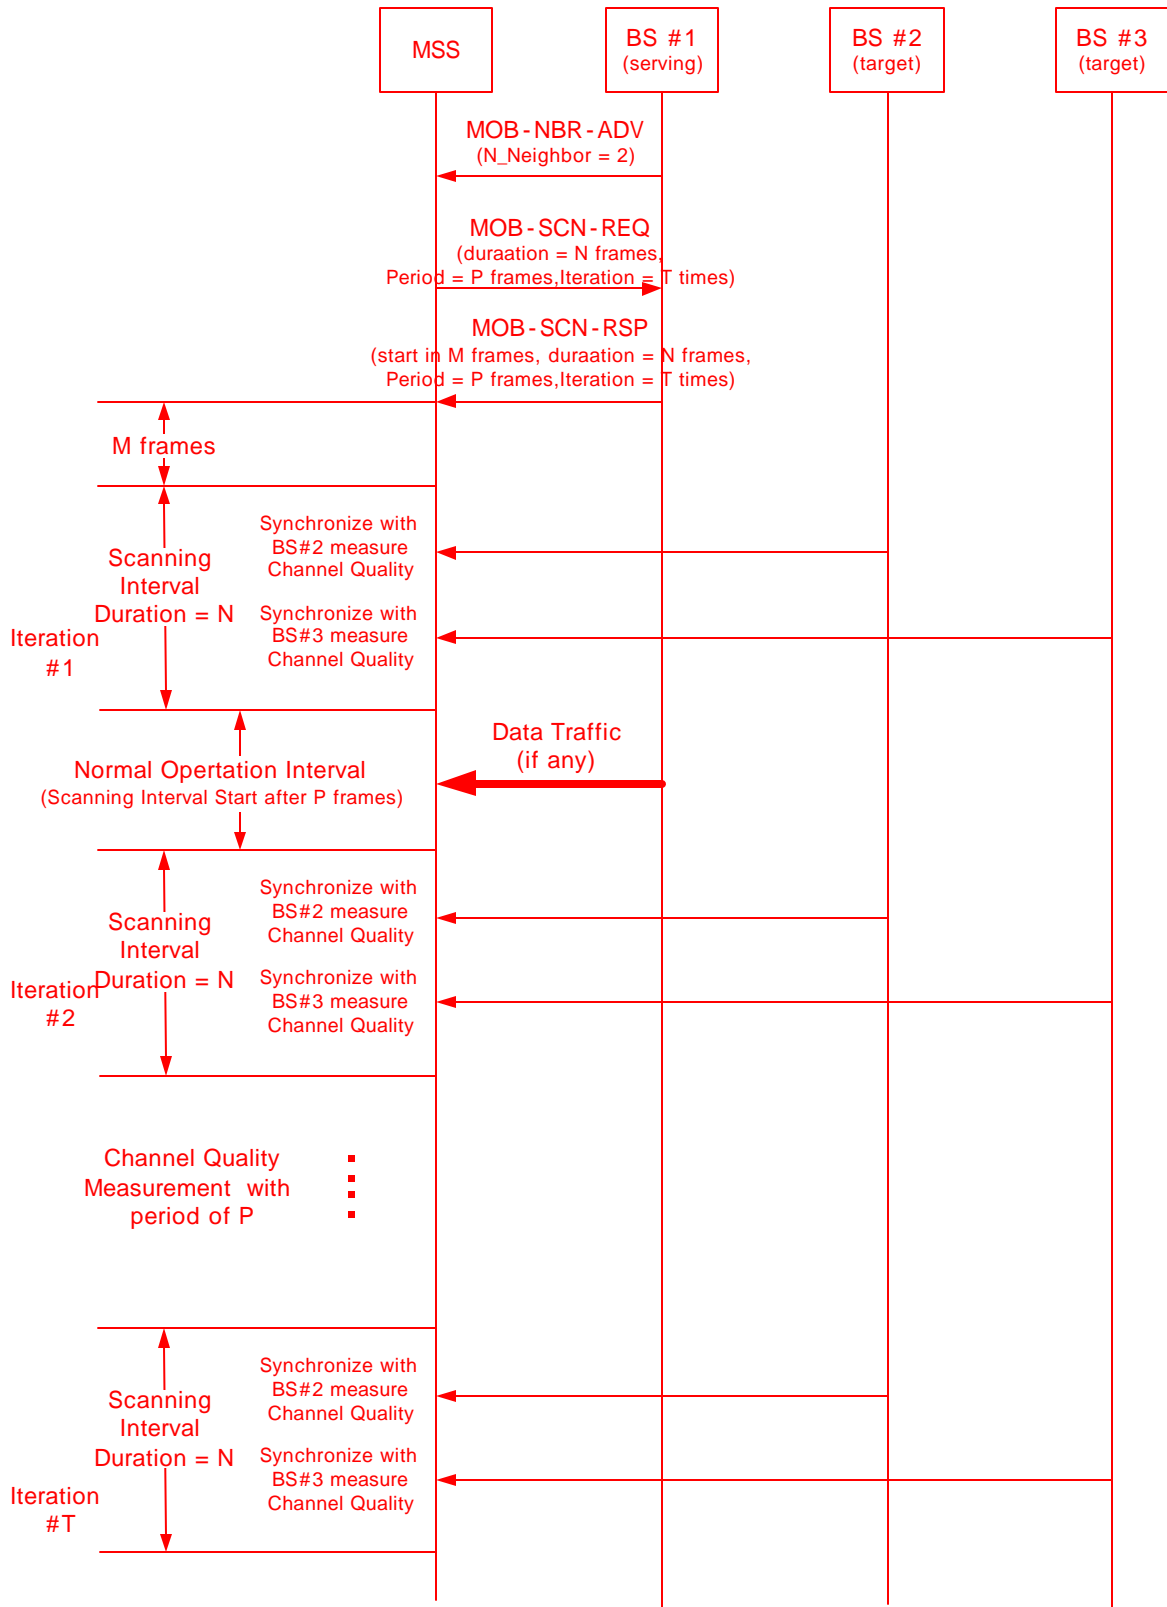


Figure E.1—Example BS advertisement and scanning (without association) by MSS request