

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	Ranging Code Power Enhancement for 802.16e OFDMA PHY
Date Submitted	2005-05-01
Source(s)	Kevin Baum Vijay Nangia Mark Cudak Motorola 1301 E. Algonquin Rd., IL02-2928 Schaumburg, IL 60196, USA mailto:Kevin.Baum@motorola.com
Re:	Call for reply comments, 802.16e/D7
Abstract	The contribution proposes an enhancement to the ranging code selection process that can compensate for limitations in the transmit power capability of portable battery operated subscriber stations.
Purpose	Adoption of proposed changes into P802.16e
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

Ranging Code Power Enhancement for 802.16e OFDMA PHY

Kevin Baum

Vijay Nangia

Motorola Labs

1. Overview

The contribution proposes an enhancement to the ranging code selection process that can compensate for limitations in the transmit power capability of portable, battery operated subscriber stations. In the current draft of WirelessMAN-OFDMA PHY, separate sets of the ranging codes are defined for initial ranging, periodic ranging, and bandwidth request. All of these ranging codes are derived from a Pseudo-Random Binary Sequence (PRBS) generator and have a length of 144 bits. When a ranging code of a particular type (i.e., initial ranging, periodic ranging, bandwidth request) needs to be transmitted, one is selected randomly from the set of ranging codes assigned to that particular function.

The PAPR of the PRBS based ranging codes, when modulated onto the OFDMA subchannels of the ranging channel, is typically in the range of 7 dB to 12 dB. This can be seen from Figure 1 which shows the CDF of the PAPR of the 256 ranging codes for the case of $UL_IDcell = 0$, where the lowest numbered subchannel in the ranging channel is zero.

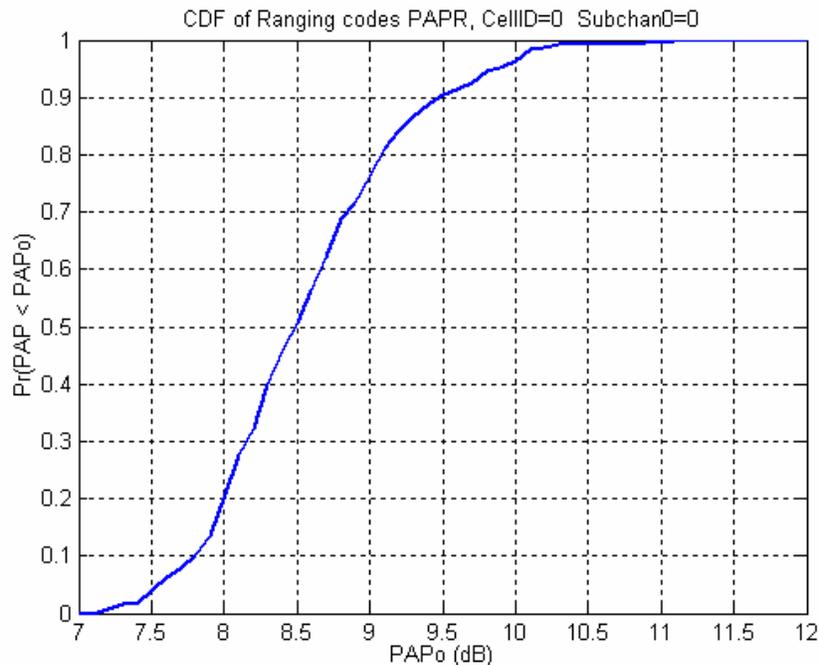


Figure 1. CDF of ranging codes PAPR for $UL_CellID=0$.

Considering that portable, battery powered devices will have a very limited transmit power capability compared to fixed access devices, a near-far problem can arise on the ranging channel. Specifically, a portable SS near the cell edge may

be unlucky enough to pick one of the high PAPR ranging codes, and not have enough transmit power available to meet the desired received signal level at the BS. In that situation, a near-far problem can occur if other SSs using the same ranging channel are transmitting at a power level that satisfies the desired received signal level at the BS (these SSs may be other portable units located closer to the BS or fixed access units). Even in the absence of contention, when an SS cannot meet the desired signal level at the BS, its SNR will be degraded accordingly due to the power amplifier output limitations.

In order to enhance the performance of the ranging channel for the case where a SS cannot initially meet the desired received signal level at the BS due to a high PAPR ranging code, we propose a simple modification to the current random ranging code selection process. The outline of the proposal is as follows:

- A SS that wants to transmit a ranging code determines the desired transmit power for the transmission. This is based on procedures already defined in the specification (e.g., Section 6.3.9.5.1 for initial ranging with no prior calibration, Section 8.4.10.3 for transmissions after power-control calibration, and parameter “Ranging data ratio” in Table 355 UCD burst profile encodings – WirelessMAN-OFDMA).
- The SS determines whether it has sufficient power amplifier (PA) output capability to achieve the desired transmit power, assuming that a worst-case PAPR ranging code (approximately 12 dB) might be chosen.
- A ranging code rI is randomly selected. If the SS determined it has sufficient power for a worst-case PAPR ranging code in the previous step, then the ranging code rI is used for the ranging transmission. Otherwise, the SS will attempt to select a ranging code with a low enough PAPR that the transmit power can be increased to meet or at least come close to the desired transmit power. The specific procedure for selecting the ranging code is described below:
 - The SS will set a worst case acceptable PAPR value, denoted $PAPR_{acc}$, equal to $\max[\text{PAPR needed to meet the desired transmit power level, } \alpha \text{ dB}]$. The threshold α needs to be made large enough to prevent the ranging code selection from becoming too deterministic for an SS in that wants an extremely low PAPR ranging code. On the other hand, α needs to be small enough to ensure significant PAPR gains can be achieved by SSs in worst-case conditions. Based on the CDF of the PAPRs in Figure 1, we will choose $\alpha = 8 \text{ dB}$.
 - The SS will evaluate the PAPR of the ranging code rI . If the PAPR of rI is less than $PAPR_{acc}$, then that code is used as the ranging code. Otherwise, the SS may randomly select another code and compare its PAPR to $PAPR_{acc}$. The SS may continue to randomly select additional ranging codes until the currently selected code has a PAPR less than $PAPR_{acc}$. Then the SS will use the last selected code as its ranging code. Alternatively, the SS may stop searching before the stopping criterion of $\text{PAPR} < PAPR_{acc}$ has been met. In this case, the SS will select the lowest PAPR code that it has found so far as the ranging code.

The above procedure can be used for initial ranging, periodic ranging, or bandwidth requests. Since the ranging waveform PAPR values are typically between 7-12 dB, so there is a potential gain of several dB with the proposed technique.

Simulation Results

In order to verify that the proposed method maintains a collision probability similar to the existing method, a series of simulations were run. One ranging channel consisting of six subchannels is assumed. The lowest numbered subchannel in the ranging channel = 0 and the UL_IDcell = 0. N_{users} are assumed to be transmitting CDMA ranging codes on the ranging channel during the same ranging symbol. N_a is the number of available codes (for initial ranging, or periodic ranging, or bandwidth requests) from which a user has to select the ranging code. A uniform distribution of “desired” PAPR values (i.e., PAPR needed to meet the desired transmit power level) between 6 and 16 dB is assumed.

The randomness of the code selection process can be evaluated by computing the collision rate of the ranging codes. The collision rate is defined as,

$$Collision\ rate = \frac{number\ of\ users\ colliding}{total\ number\ of\ users\ transmitting\ ranging\ codes}$$

Figure 2 and Figure 3 show the ranging code collision rate for different number of ranging users (N_{users}) and are for $N_a = 64$ or $N_a = 128$ ranging codes respectively. The collision rate for the current method described in REVd/D5 and the proposed method is shown.

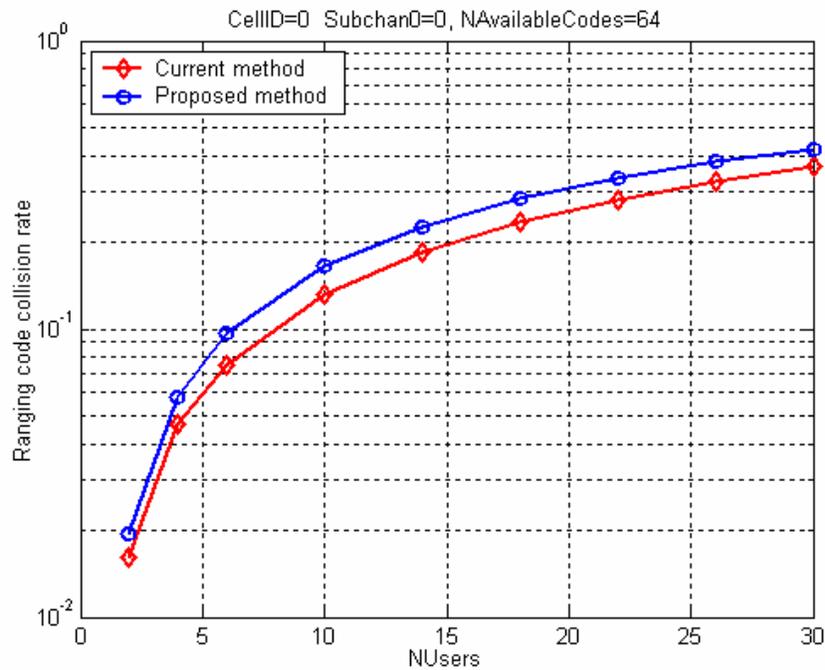


Figure 2. Ranging code collision rate for $N_a=64$ codes.

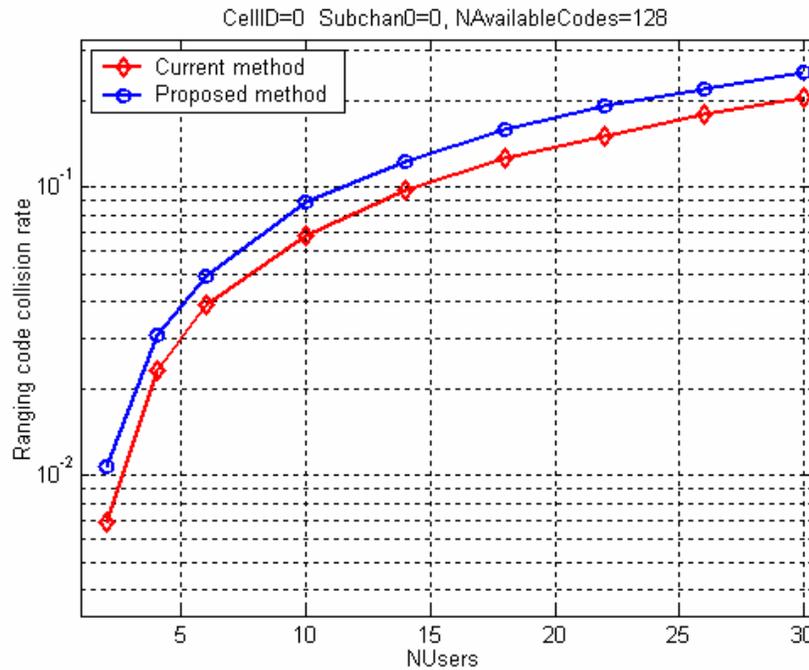


Figure 3. Ranging code collision rate for $N_a=128$ codes.

It can be seen from Figure 2 and Figure 3 that the collision rate of the proposed method is comparable to that of the current method even for the relatively high number of 30 users transmitting ranging codes.

Also, to evaluate the gains provided by the proposed method, the number of users achieving $PAPR < PAPR_{acc}$ with and without the proposed method was evaluated. When a user achieves $PAPR < PAPR_{acc}$, it is labeled as “satisfied”. For $N_a = 64$ or $N_a = 128$ ranging codes, it can be shown that the proposed method satisfies 31% more users than the current method.

In summary, the proposed method provides a transmit power enhancement to the SSs that have difficulty in meeting the desired received signal level at the BS while maintaining good randomness in the code selection process.

2. Proposed Text Changes

[Insert a new section 8.4.7.4 as follows]

-----Start from here -----

8.4.7.4 OFDMA Ranging Power Enhancement (Optional)

The PAPR of the PBRS based ranging codes, when modulated onto the OFDMA subchannels of the ranging channel, is typically in the range of 7 dB to 12 dB. In order to enhance the performance of the ranging channel for the case where a SS has difficulty meeting the desired received signal level at the BS due to power amplifier output limitations (such as a portable battery operated SS), a SS may optionally use the following ranging code selection procedure. The procedure may be used individually for the N initial ranging codes, M periodic ranging codes, or L bandwidth request codes defined in 8.4.7.3.

- A SS that wants to transmit a ranging code determines the desired transmit power for the transmission. This is based on procedures already defined other sections of the specification (e.g., Section 6.3.9.5.1 for initial ranging with no prior calibration, Section 8.4.10.3 for transmissions after power-control calibration, and parameter “Ranging data ratio” in Table 355 UCD burst profile encodings – WirelessMAN-OFDMA).
- The SS determines whether it has sufficient power amplifier (PA) output capability to achieve the desired transmit power, assuming that a worst-case PAPR ranging code (12 dB) might be chosen.
- A ranging code r_1 is randomly selected from the appropriate set of available codes (set of N or M or L codes for initial ranging, or periodic ranging, or bandwidth requests, respectively). If the SS determined it has sufficient power for a worst-case PAPR ranging code in the previous step, then the ranging code r_1 is used for the ranging transmission. Otherwise, the SS will attempt to select a ranging code with a low enough PAPR that the transmit power can be increased to meet or at least come close to the desired transmit power. The specific procedure for selecting the ranging code is described below:
- The SS will set a worst case acceptable PAPR value, denoted $PAPR_{acc}$, equal to $\max[PAPR \text{ needed to meet the desired transmit power level, } \alpha \text{ dB}]$. The threshold α needs to be made large enough to prevent the ranging code selection from becoming too deterministic for an SS in that wants an extremely low PAPR ranging code. On the other hand, α needs to small enough to ensure significant PAPR gains can be achieved by SSs in worst-case conditions. The value of α shall be set to $\alpha \approx 8 \text{ dB}$.
- The SS will evaluate the PAPR of the ranging code r_1 . If the PAPR of r_1 is less than $PAPR_{acc}$, then that code is used as the ranging code. Otherwise, the SS may randomly select another code from the appropriate set and compare its PAPR to $PAPR_{acc}$. The SS may continue to randomly select additional ranging codes until the currently selected code has a PAPR less than $PAPR_{acc}$. Then the SS will use the last selected code as its ranging code. Alternatively, the SS may stop searching before the stopping criterion of $PAPR < PAPR_{acc}$ has been met. In this case, the SS will select the lowest PAPR code that it has found so far as the ranging code.

However, the procedure described in this section shall not be used for a particular type of ranging (i.e., initial, periodic, bandwidth request) unless enabled by the UCD message type = 21.

-----*End here*-----

[Add a new entry table entry as table 353a follows]

-----*Start from here*-----

Add the following to Table 353a UCD PHY-specific channel encodings – WirelessMAN-OFDMA

<u>Name</u>	<u>Type</u> (1 byte)	<u>Length</u>	<u>Value (variable length)</u>
<u>Modified Ranging Code Selection</u>	<u>21</u>	<u>1</u>	<u>Bit 0 = 1; Allow method of 8.4.7.4 on initial ranging</u> <u>Bit 1 = 1; Allow method of 8.4.7.4 on periodic ranging</u> <u>Bit 2 = 1; Allow method of 8.4.7.4 on bandwidth request</u>

-----End here -----