

IEEE 802.3CY – BEYOND 10G ELECTRICAL AUTOMOTIVE ETHERNET PHY TF

Link Segment Measurements

Bert Bergner, Emilio Cuesta, Eric DiBiaso

January 19, 2020

Purpose of the Analysis


- Measure insertion loss of new automotive grade cable and consider various operating temperatures conditions
- Measure return loss of various cable segments with attached connectors up to 10 GHz
- Calculate Micro-Reflection response of the various cable segments

Fixture description and de-embedding

Same fixtures as in DiBiasoBergnerCuesta_3cy_3_0920

- PCB Trace length: 20mm
- PCB Stackup:

W = 1.145mm	Cu 35 μm
H = 780mm	Rogers 780 μm
	Cu 35 μm
- PCB total loss (x2 to consider loss at both sides)

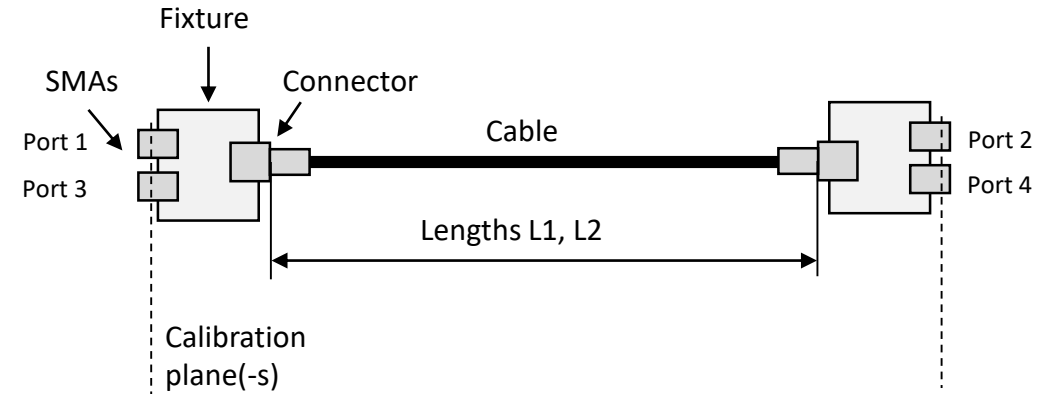


- simple de-embedding by measuring 2 cable lengths incl. fixtures and subtraction of LogMag ILs:

$$IL_{2x\ Fixture} = IL_{Cable\ 1+2x\ Fix} - \frac{L1}{L2 - L1} (IL_{Cable\ 2+2x\ Fix} - IL_{Cable\ 1+2x\ Fix})$$

- smoothing to eliminate ripples

→ sufficient accuracy to consider the fixtures IL

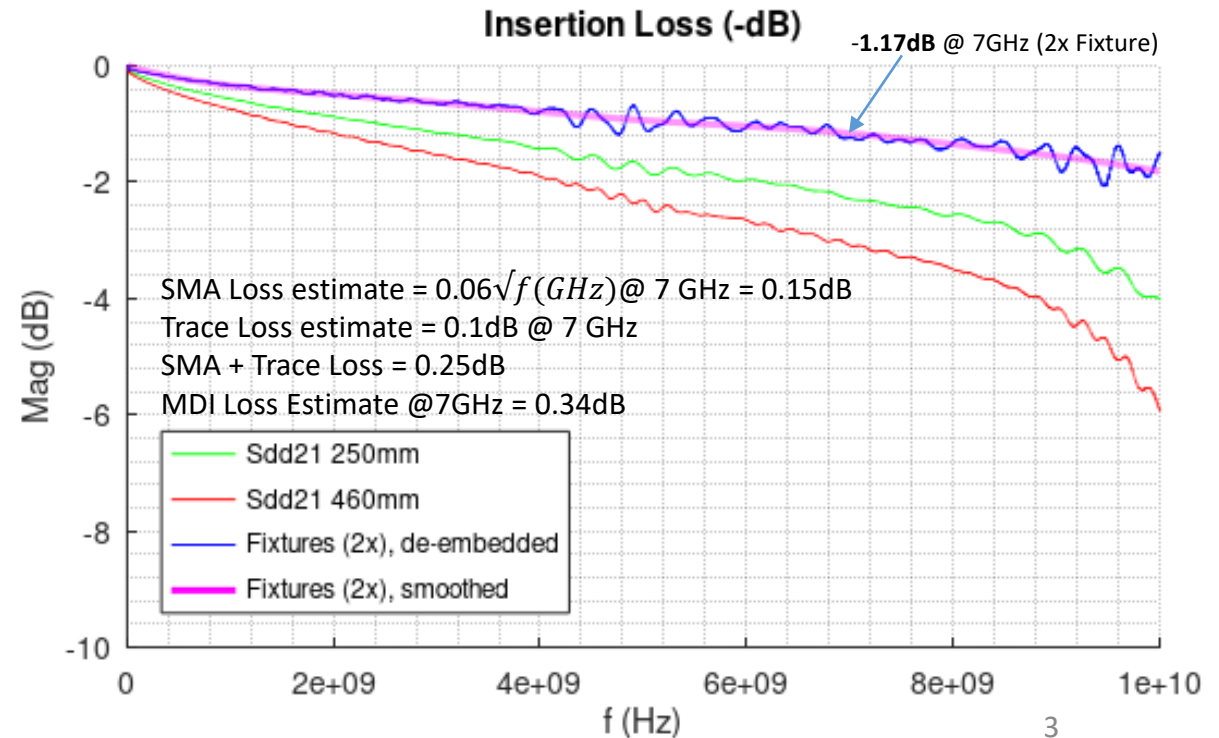

Test Sequence and Samples

- S-parameters were captured at different temperatures in the following sequence (same cable assembly):

- T1 = 20°C
- T2 = -40°C
- T3 = 105°C
- T4 = 20°C

- Samples:


Cable C

- construction (SDP)
- 10 GHz type
- 2x 0.14mm²
(AWG 26)
stranded




Same arrangement as in DiBiasoBergnerCuesta_3cy_3_0920

Insertion Loss – Sample C (fixtures removed)

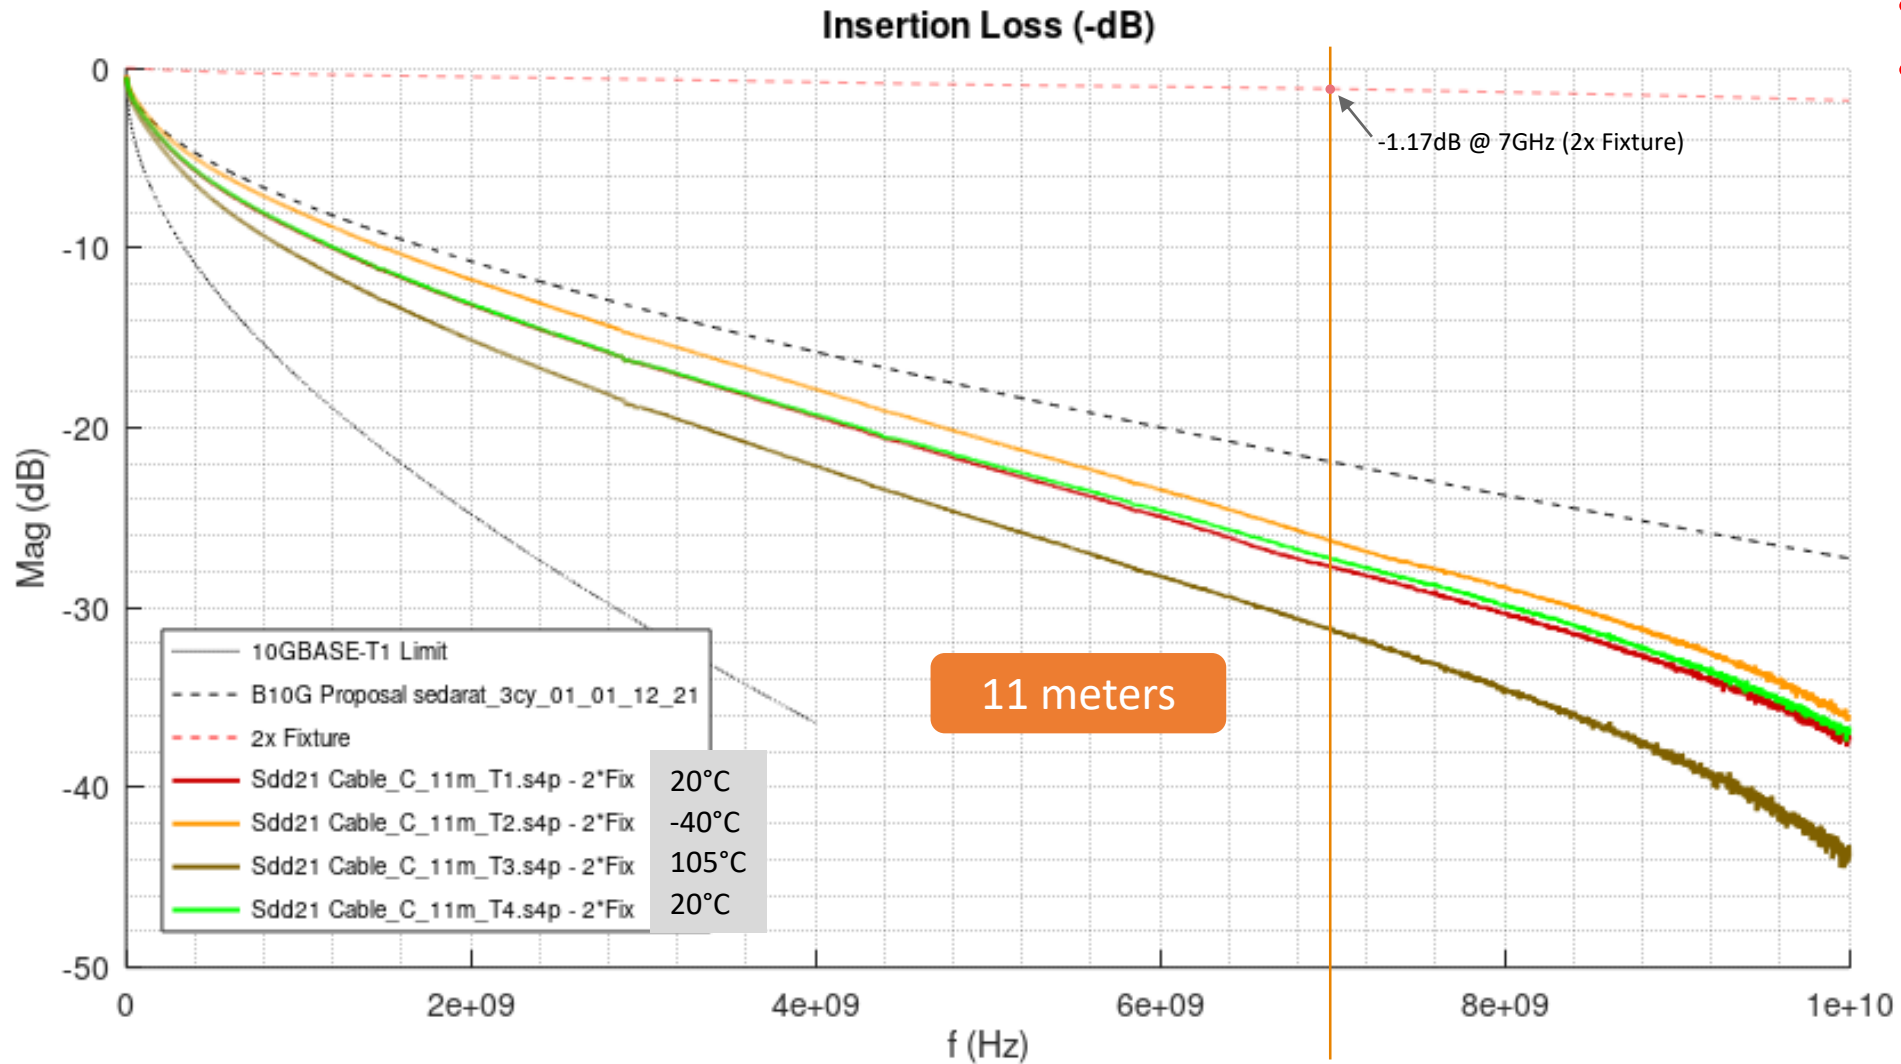




- 11m as measured
- No inline connectors

Insertion Loss – Sample C (fixtures removed)

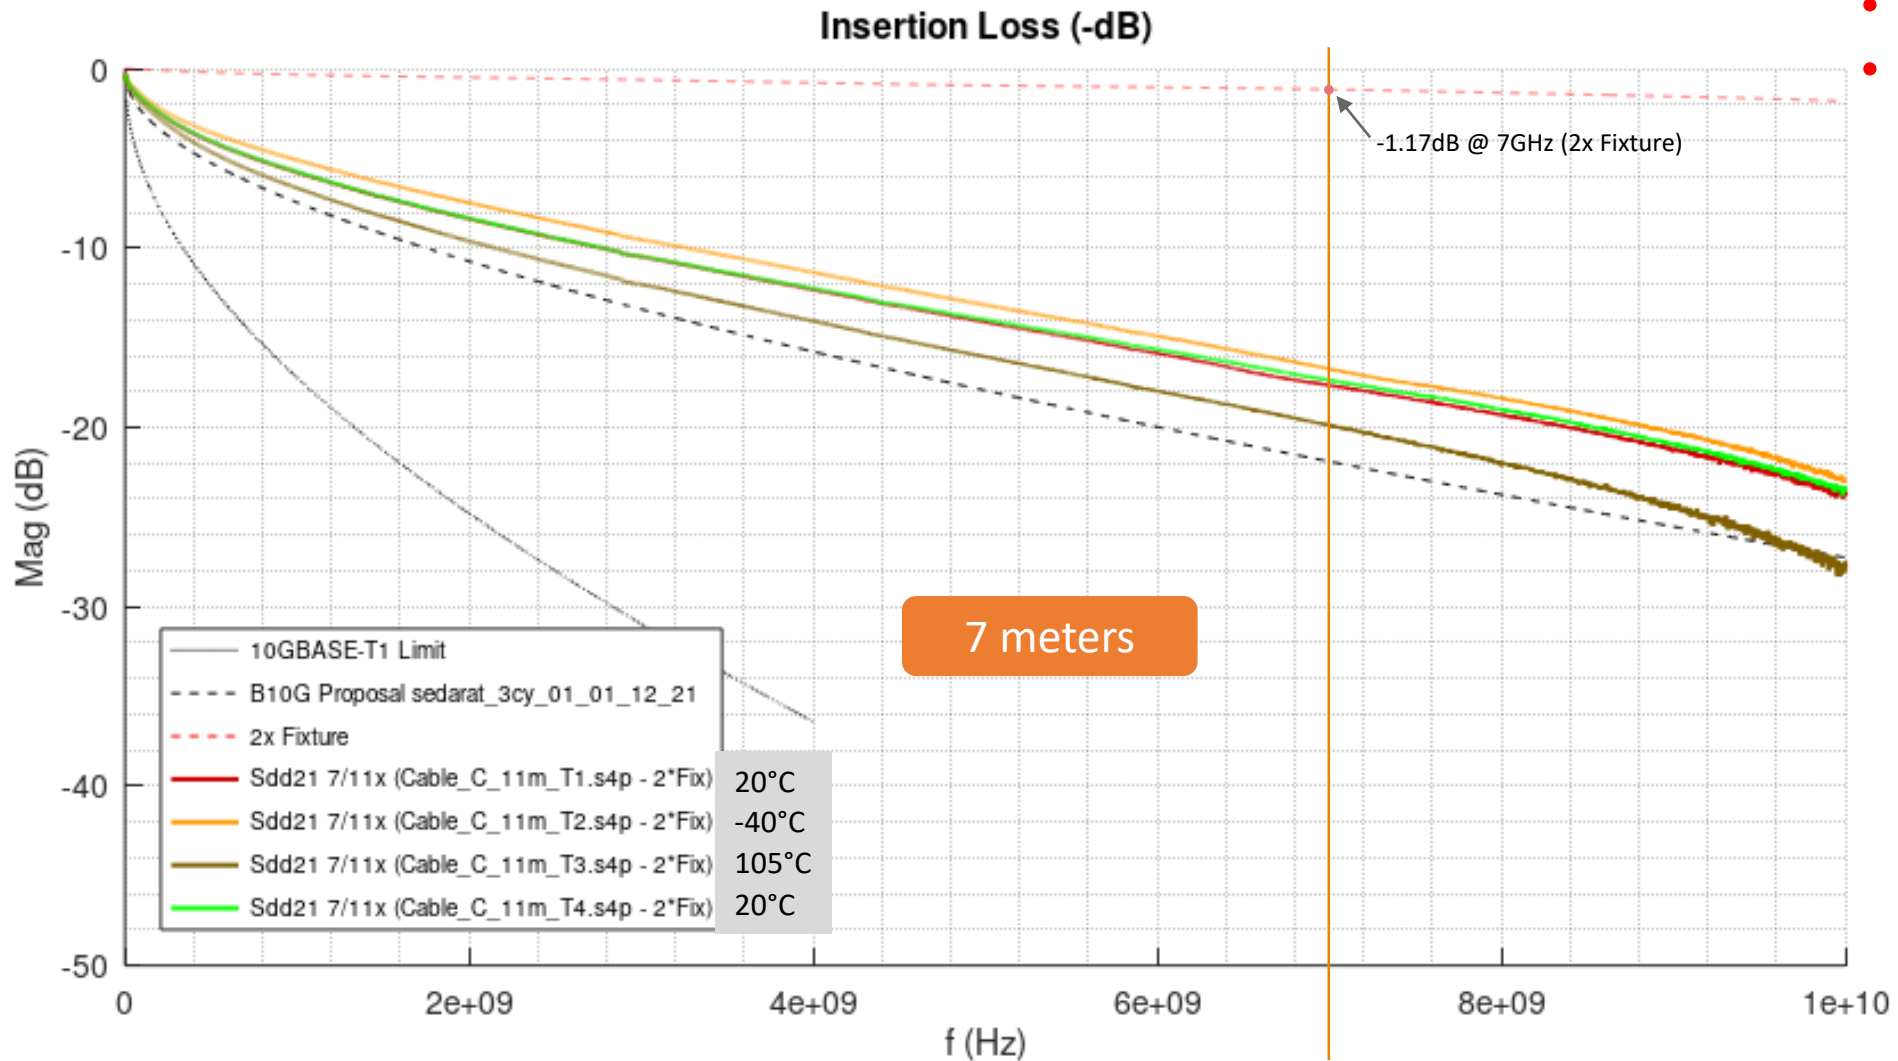




- Scaled to 7m
- No inline connectors

Link segment configuration for RL measurements

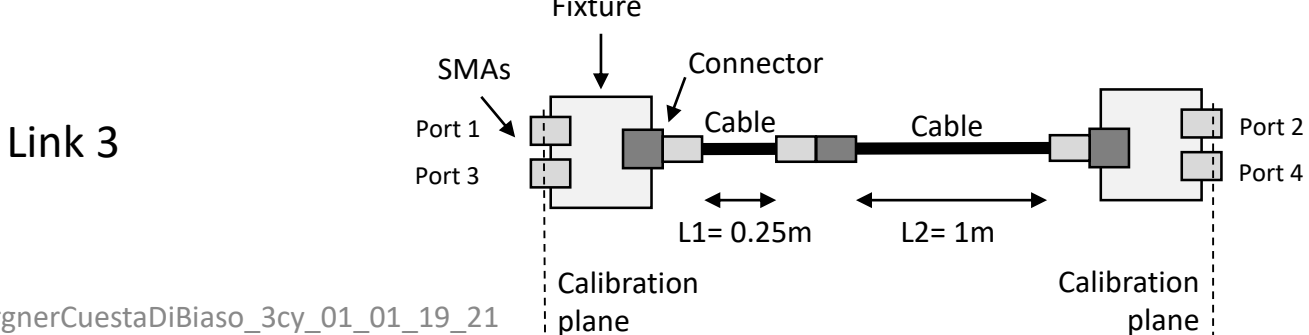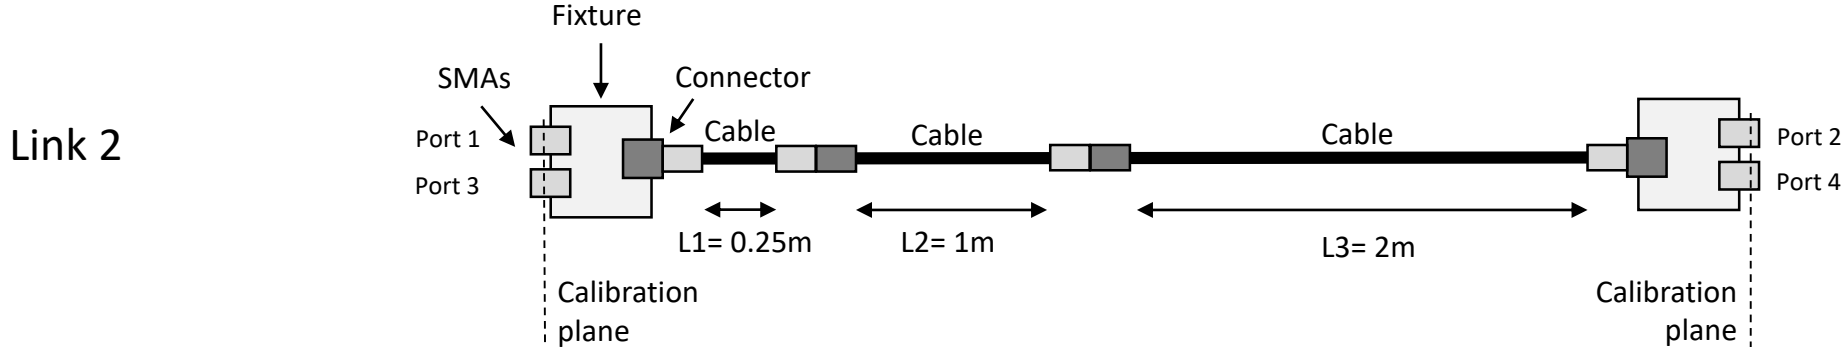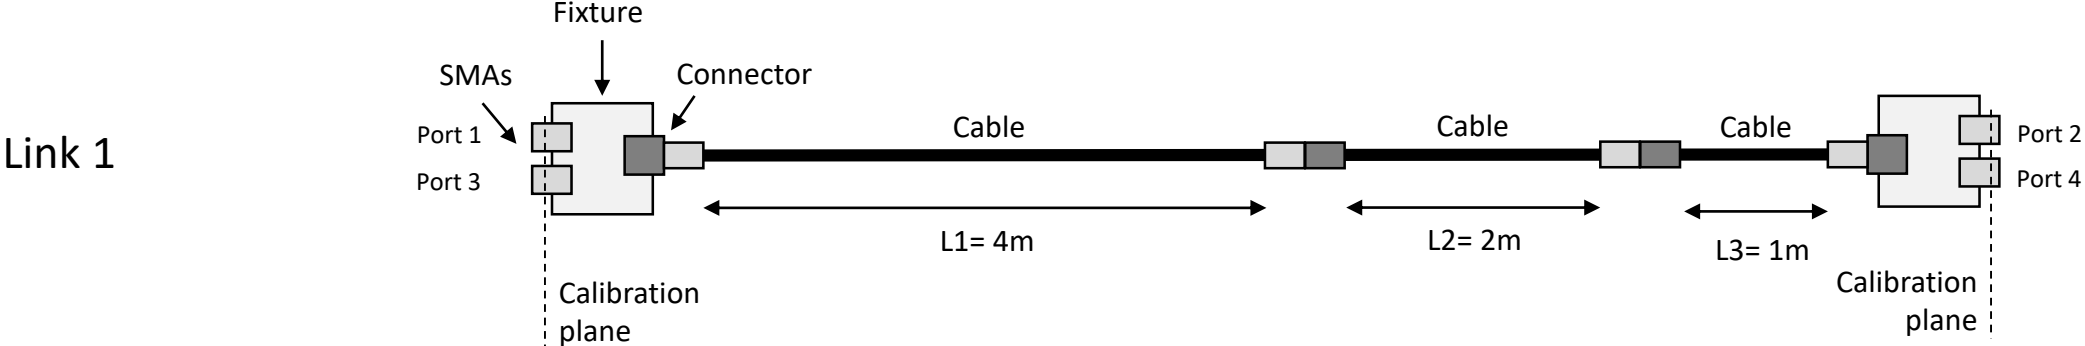


*All Measurements taken at Room Temperature

Link Segment with Inliner – Link 1 (4-2-1)

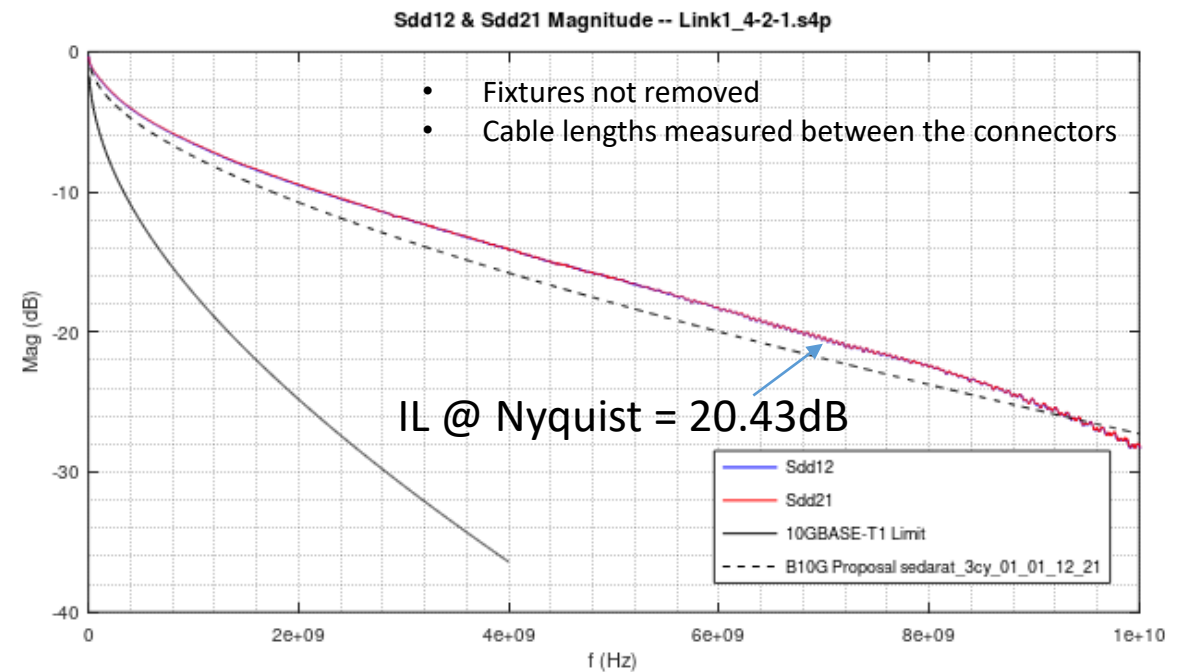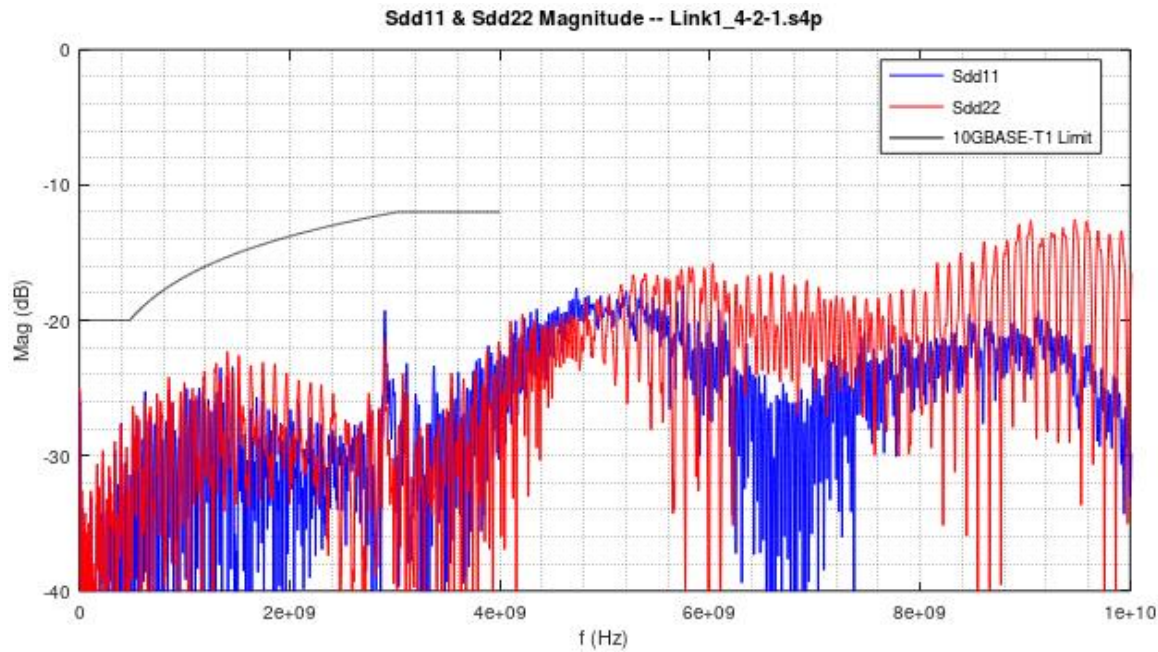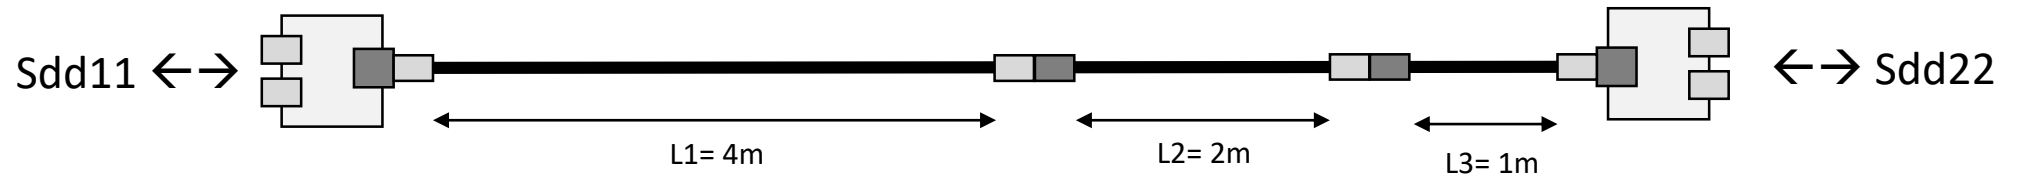


Micro-Reflection Response Link 1 (4-2-1)

Residual Echo Magnitude

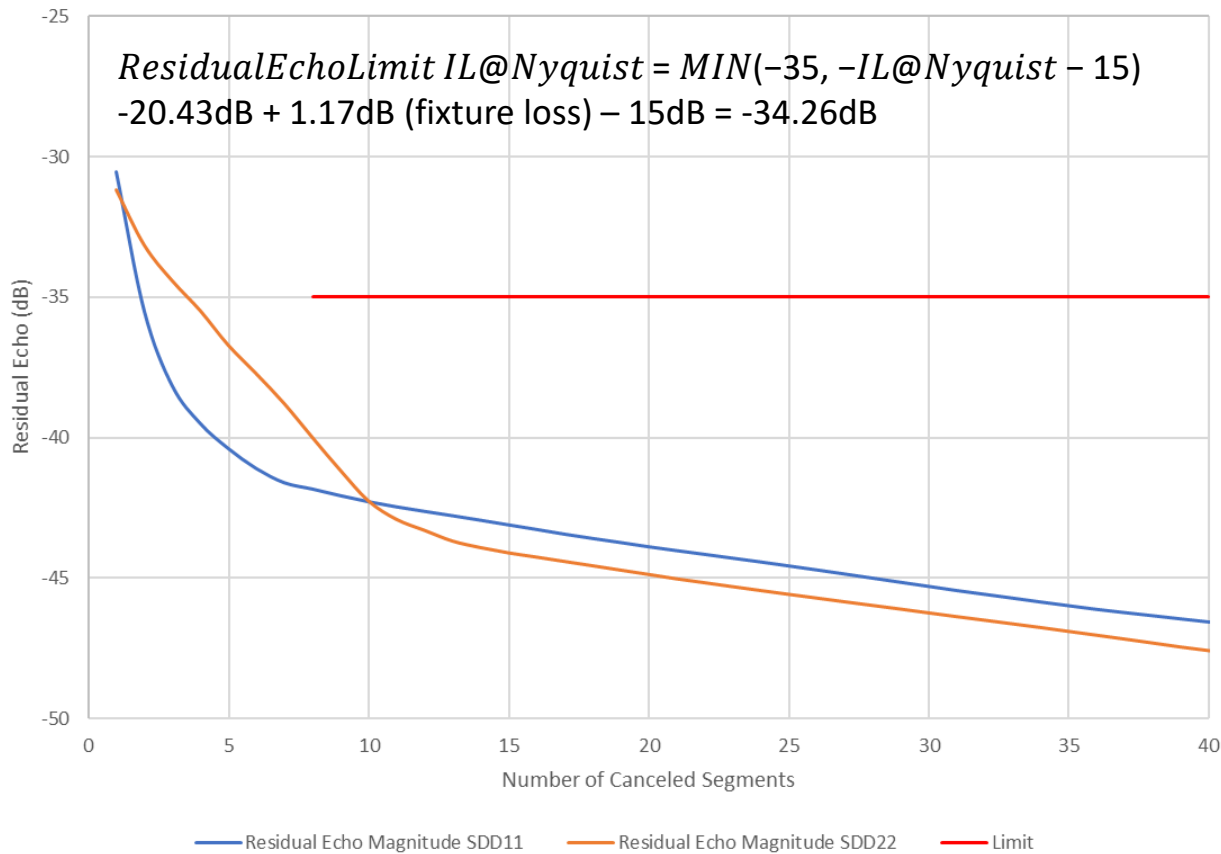




Echo Response Amplitude

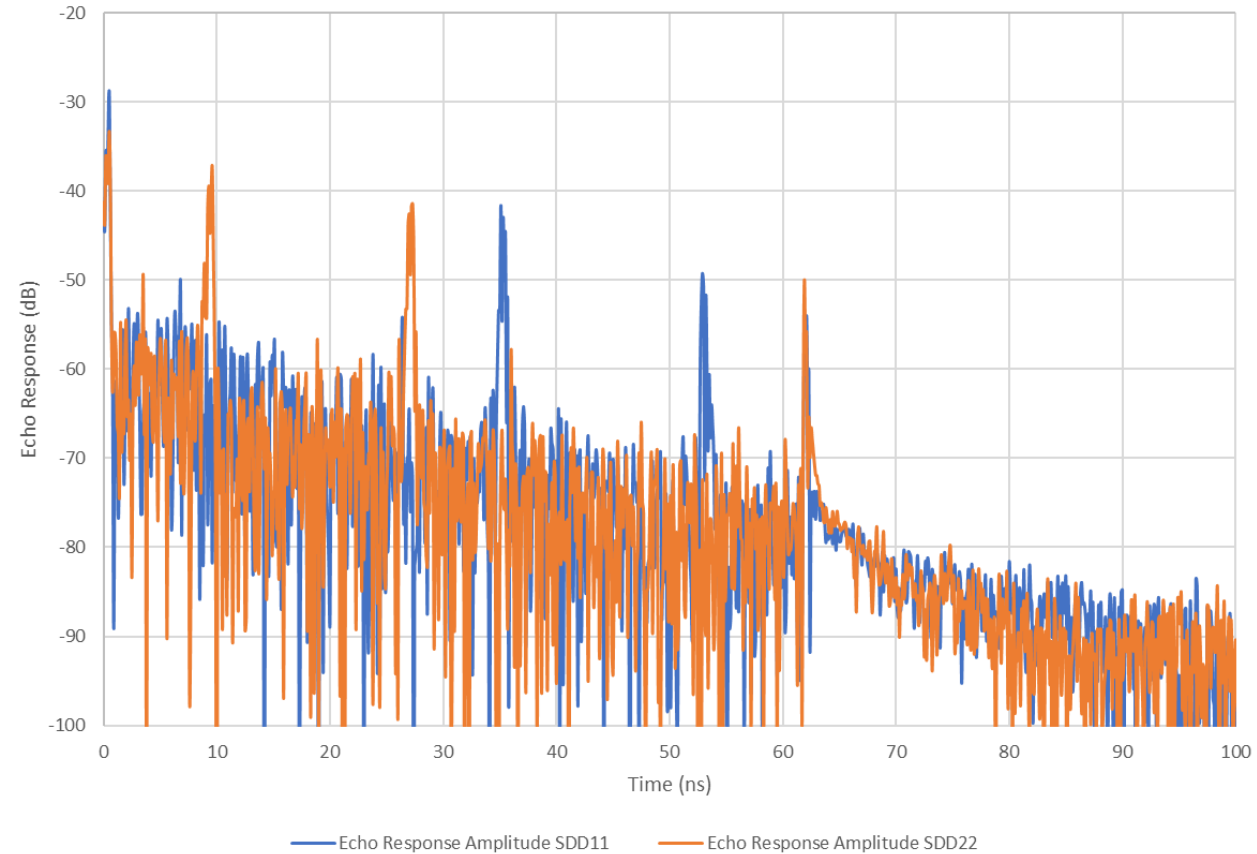

Residual Echo Limit Referencing jonsson_3cy_01_12_08_20


BergnerCuestaDiBiaso_3cy_01_01_19_21

Link Segment with Inliner – Link 2 (0.25-1-2)

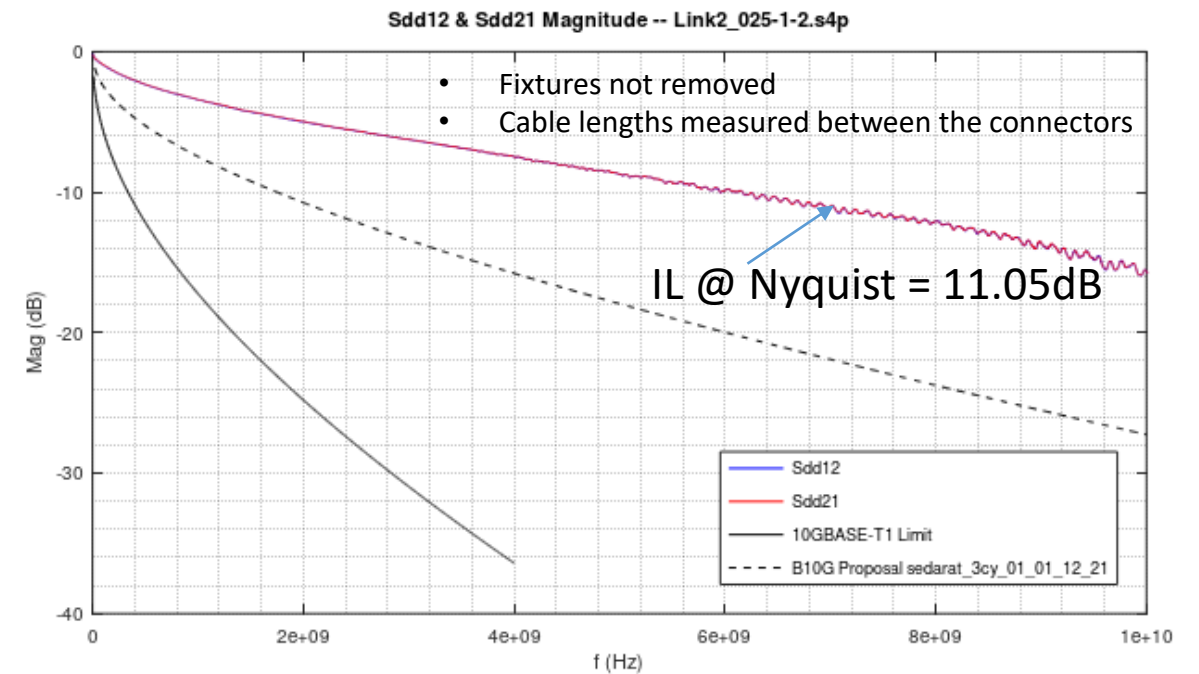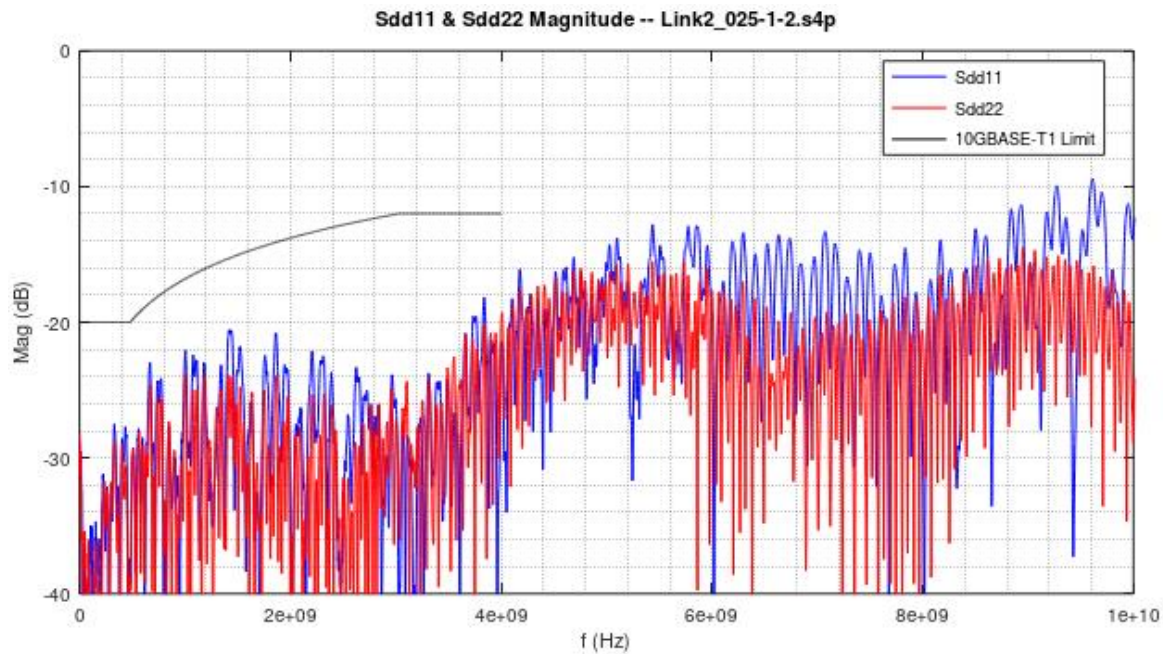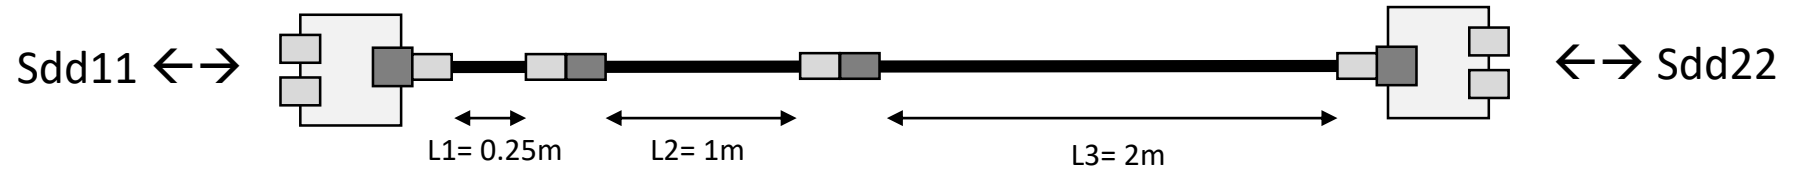


Micro-Reflection Response Link 2 (0.25-1-2)

Residual Echo Magnitude

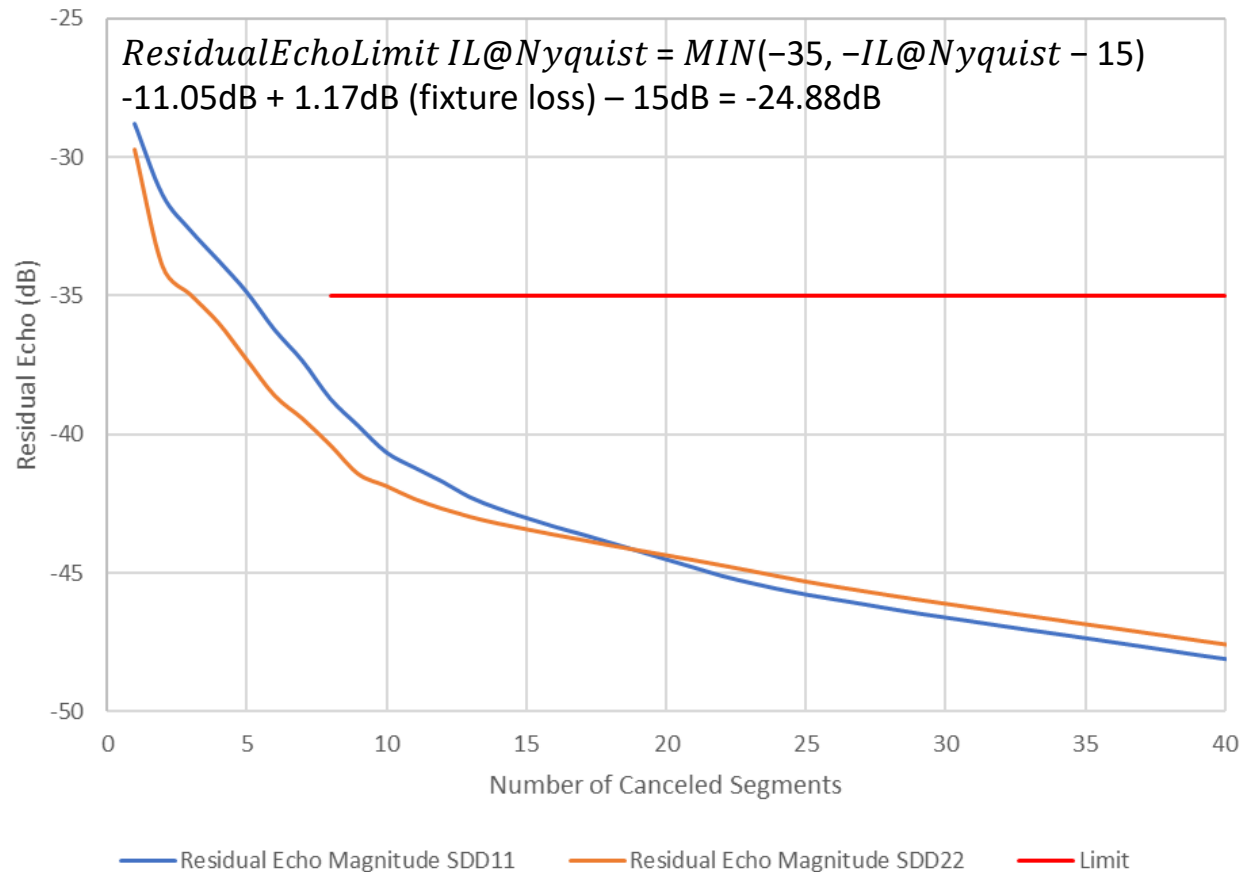




Echo Response Amplitude

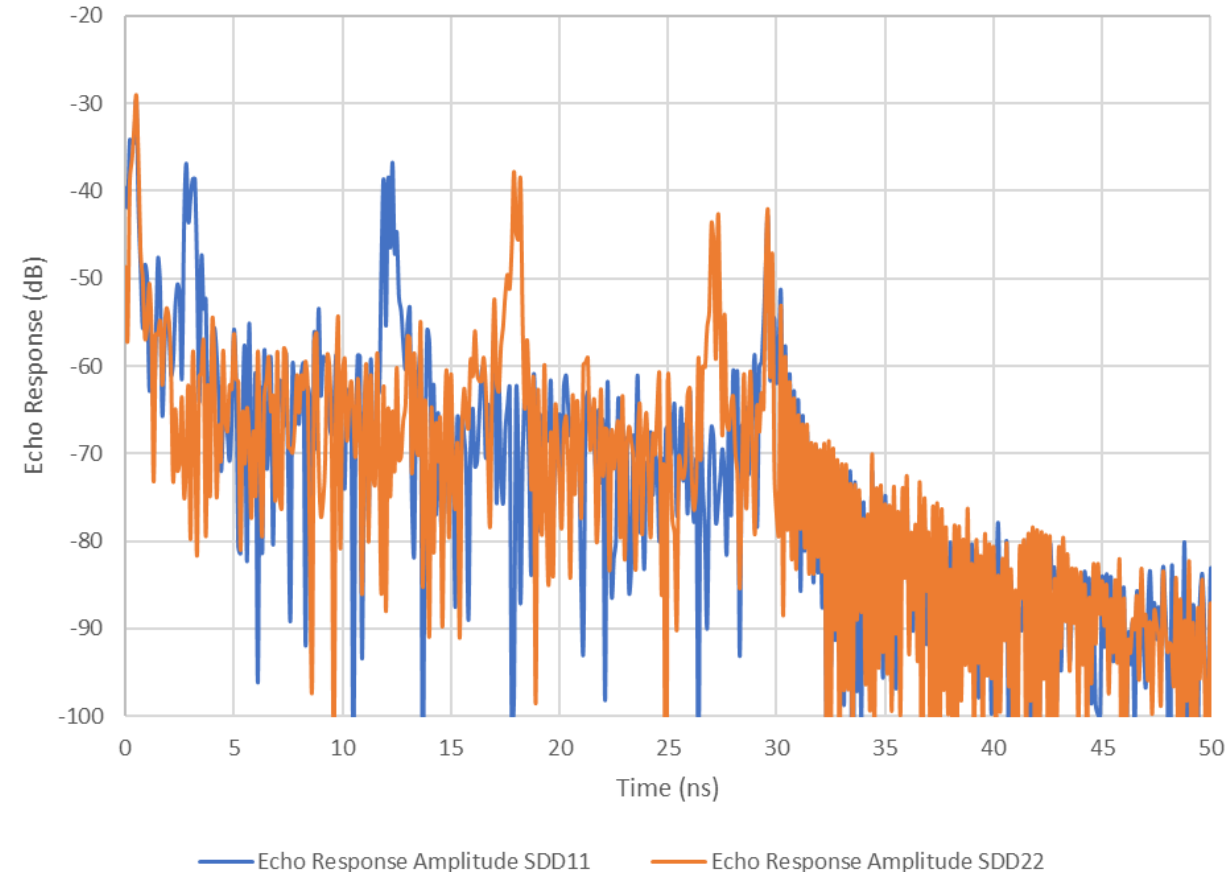

Residual Echo Limit Referencing jonsson_3cy_01_12_08_20


BergnerCuestaDiBiaso_3cy_01_01_19_21

Link Segment with Inliner – Link 3 (0.25-1)

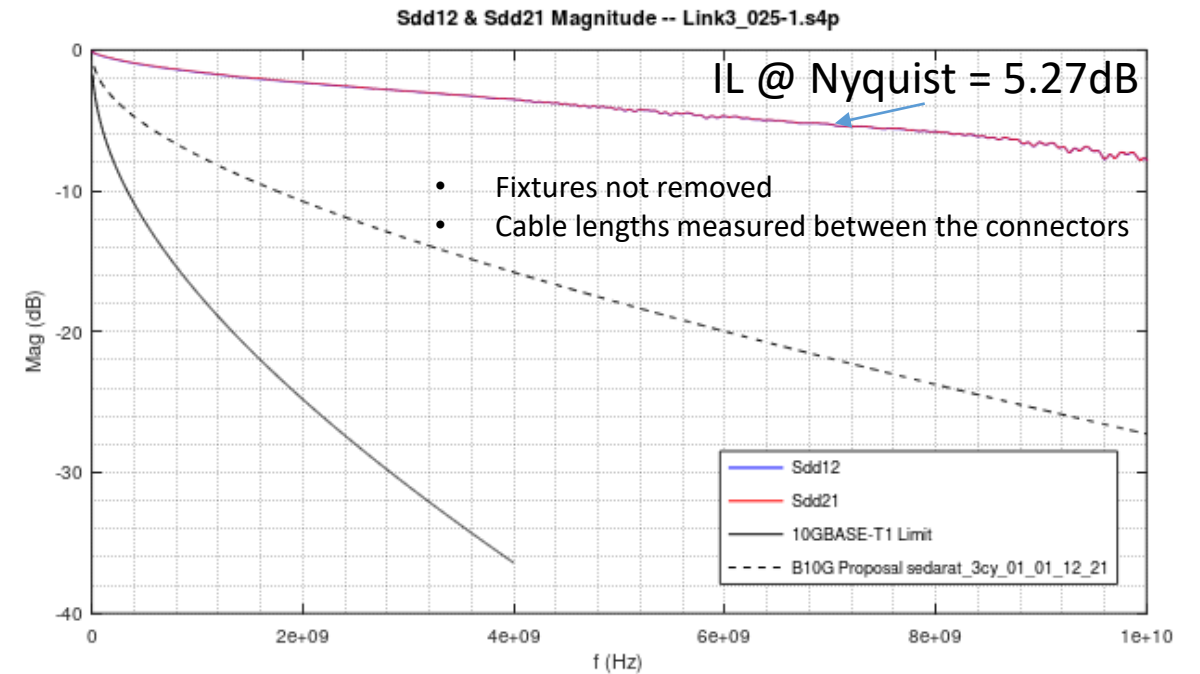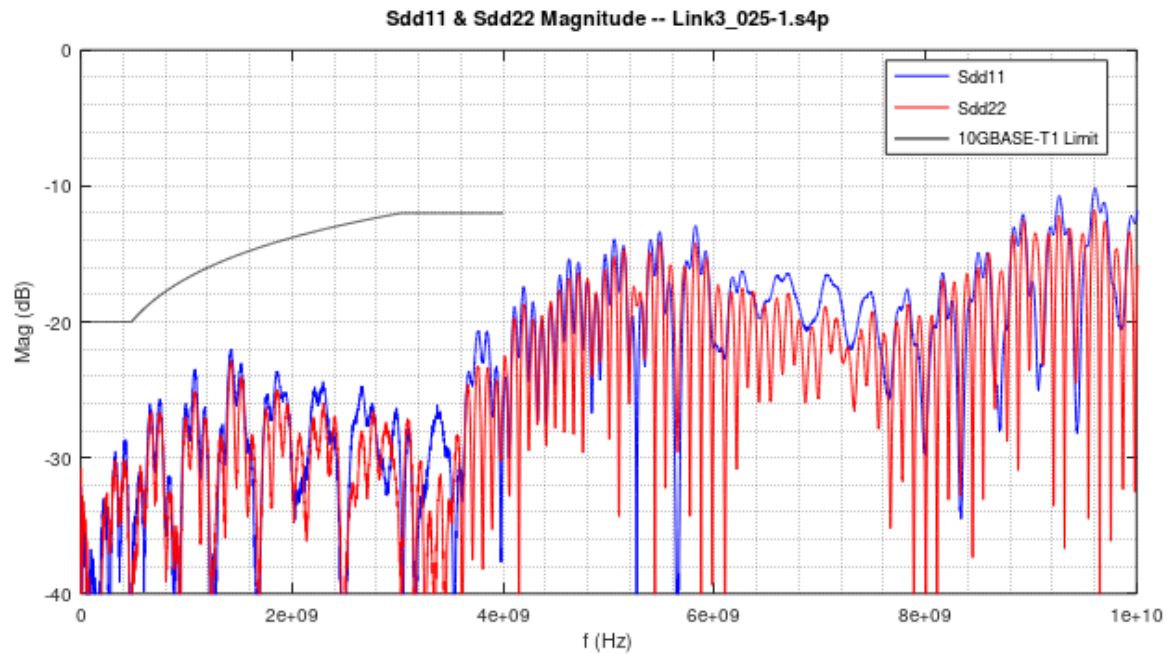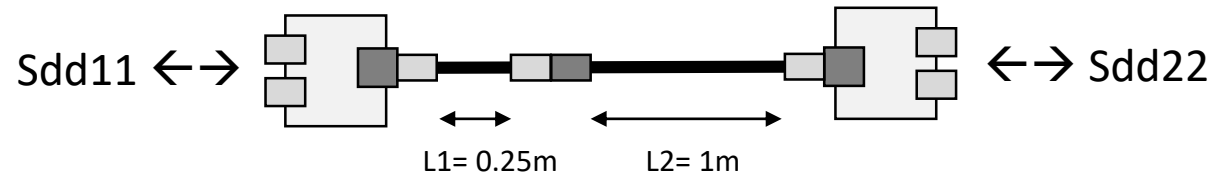


Micro-Reflection Response Link 3 (0.25-1)

Residual Echo Magnitude

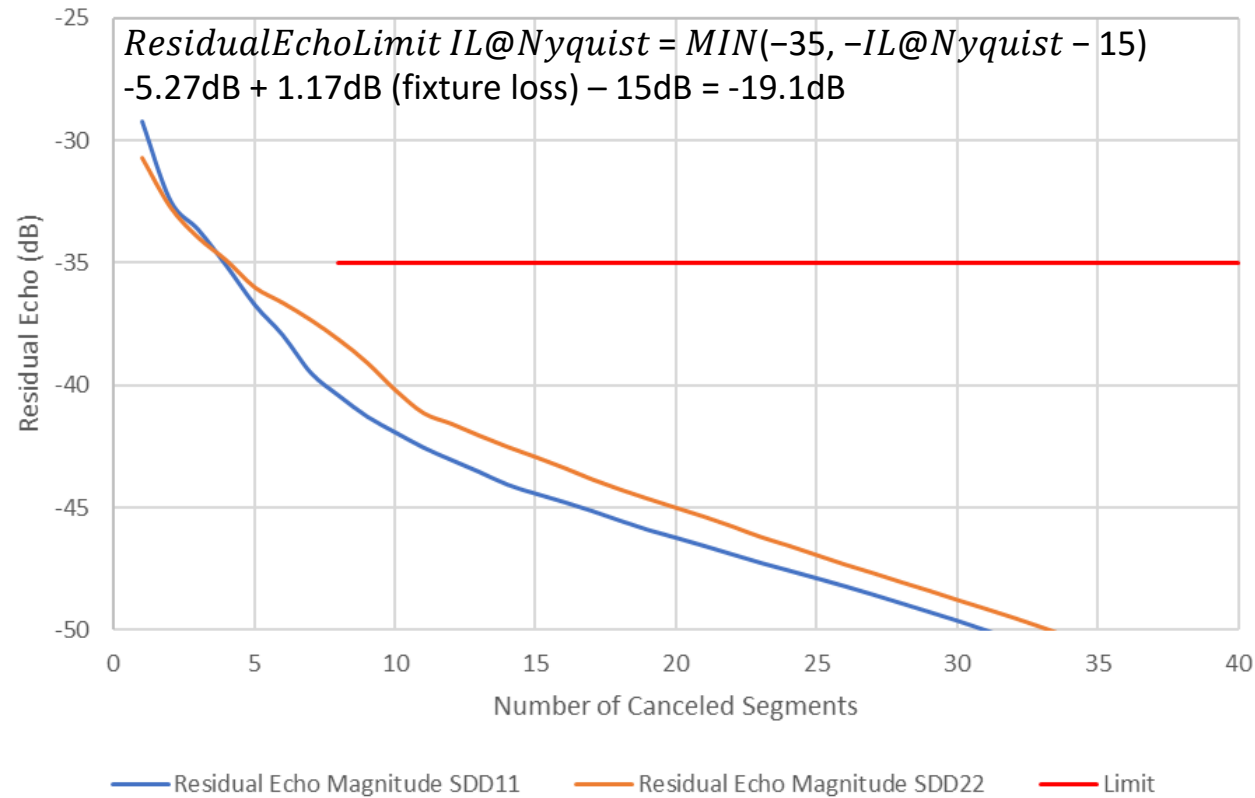

Echo Response Amplitude

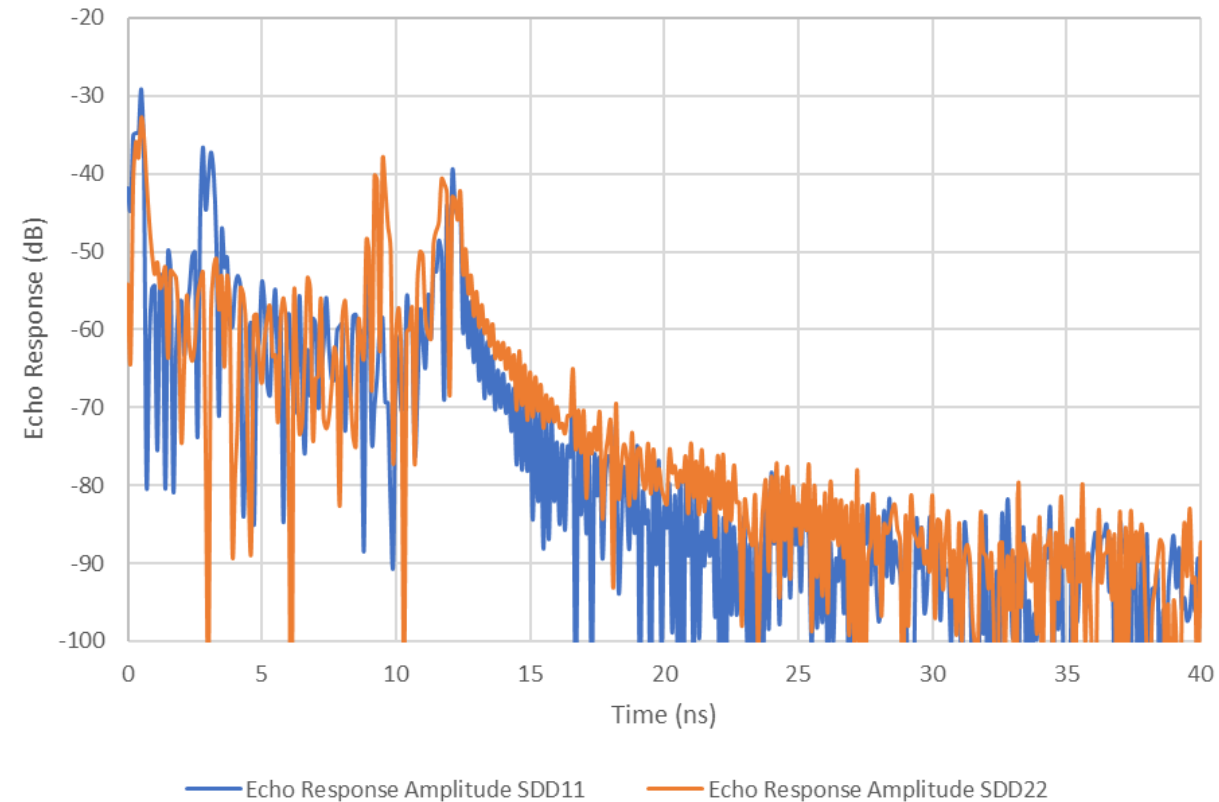

Residual Echo Limit Referencing jonsson_3cy_01_12_08_20

Conclusions / TBD's

- Proposed insertion loss limit (Sedarat_3cy_01_01_12_21) can be met with AWG26 cables up to 7m including margin for higher temperature
- Proposed insertion loss limit cannot be met with currently available AWG26 cables up to 11m
 - New SDP cables needed (larger AWG)
 - Use coax cable
 - Different modulation (lower Nyquist frequency)
 - Mult-lane architecture
- With this automotive cable, the residual echo limits can be met (jonsson_3cy_01_12_08_20).
 - If the inliners are close to the measurement port, the residual echo is higher but can still meet the limit.
- Further analysis of return loss measurements and simulations to proposed a link segment return loss limit.
 - Utilize all cable segment combinations from (wienckowski_3cy_01_01_12_21)

Thank You!!!