

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Efficient Systematic CID Allocation and Relay Path Configuration Mechanism for IEEE 802.16j (Multi-hop Relay)	
Date Submitted	2007-1-16	
Source(s)	<p>Aik Chindapol Jimmy Chui Hui Zeng Siemens Corporate Research Princeton, NJ, 08540, USA</p> <p>Teck Hu Siemens Networks Boca Raton, FL 33431, USA</p> <p>Yuan-Ying Hsu Telcordia Applied Research Center Taiwan Co., Taipei, Taiwan</p> <p>Jen-Shun Yang, Tzu-Ming Lin, Wern-Ho Sheen, Fang-Ching Ren, Chie Ming Chou, I-Kang Fu Industrial Technology Research Institute (ITRI)/ National Chiao Tung University (NCTU), Taiwan 195,Sec. 4, Chung Hsing Rd. Chutung, Hsinchu, Taiwan 310, R.O.C.</p> <p>Byung-Jae Kwak, Sungcheol Chang, Young-il Kim ETRI 161, Gajeong-Dong, Yuseong-Gu, Daejeon, Korea 305-350</p> <p>Kyu Ha Lee Samsung Thales San 14, Nongseo-Dong, Giheung-Gu, Yongin, Gyeonggi-Do, Korea 449- 712</p>	<p>Voice: +1 609 734 3364 Fax: +1 609 734 6565 Email: aik.chindapol@siemens.com</p> <p>yyhsu@tarc-tw.research.telcordia.com</p> <p>jsyang@itri.org.tw</p> <p>Voice: +82-42-860-6618 Fax: +82-42-861-1966 bjkwak@etri.re.kr</p> <p>Voice: +82-31-280-9917 Fax: +82-31-280-1562 kyuha.lee@samsung.com</p>

Kenji Saito, Takashi Inoue
 KDDI R&D Laboratories Inc.
 Hikarino-oka 7-1, Yokosuka,
 Kanagawa 239-0847, Japan

Voice: +81 46 847 6347
 Fax: +81 46 847 0947
saito@kddilabs.jp

Re:	IEEE 802.16j-06/034:“Call for Technical Proposals regarding IEEE Project P802.16j”
Abstract	This document describes the route update procedures with efficient CID management.
Purpose	This contribution is provided as input for the IEEE 802.16j baseline document.
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE’s name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE’s sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

删除: Sungjin Lee, Hyunjeong Kang, HyoungKyu Lim
 Samsung Electronics

删除: Voice: +82 31 279 5248
 Fax: +82 31 279 5130
steve.lee@samsung.com

删除: Mohsin Mollah, Masahito Asa
 Motorola Japan Ltd
 3-20-1, Minami-Azabu,
 Minato-ku Tokyo 106-8573 Japan

删除: Voice: +81 3 5424 3209
mohsin@motorola.com

Efficient Systematic CID Allocation and Relay Path Configuration Mechanism for IEEE 802.16j (Multi-hop Relay)

1 Introduction

In 802.16e, each connection (both management and data) is identified by a Connection ID (CID) [2]. There is no routing required; data is transmitted solely between the BS and the MS. In a centralized multi-hop relay system, all relay stations form a tree topology with MR-BS as the root. The routing for each MS is decided by the MR-BS. The routing path could be mainly based on the network topology and other number of factors such as measured channel qualities, QoS of each connection, fairness, etc.

This contribution proposes to use CID assignment in a multi-hop relay system as a means to indicate network topology and further help the MR-BS to perform routing path selection. In this scheme, each relay station is assigned a range of CIDs for which the relay is responsible for decoding and forwarding. The parent node will control a superset of this CID range, and any child nodes (both RS and MS) will be assigned disjoint subsets of the CID range. Because of the structure of this CID assignment, the MR-BS could compute the relay path simply based on CIDs of destination station and each relay station can recognize its packets and forward them to corresponding stations. In this way, the routing can be maintained automatically along with CID assignment and thus significantly decrease complexity, signal overhead, and path setup latency. The systematic CID allocation could also help to reduce the delay when handoff of MRS or MS occurs, which could be achieved by locating anchor RS and updating CID of moving station to maintain the topology quickly.

The proposal for this implementation has the following advantages:

- Simplified operation of the relay
- Reduction of overhead and delay in route updates
- Reuse of existing signaling to reflect topology changes due to the movement of MRSs or MSs
- Quickly locating the anchor RS for fast handoff while MRSs or MSs move

2 General Description

A unidirectional connection between BS and MS or between BS and RS is established for service flow traffic, and each connection is identified by a connection identifier (CID) [2][3]. The CID for each connection is inserted within the MAC header of a packet. When it is received, first each station checks whether the CID of the packet is for itself or for its subordinate stations. Each station accepts the packet and does the process if the packet is intended to itself or its subordinate station. Otherwise, it ignores the packet and does nothing.

Each station can distinguish the received packets by examining the CID in the MAC header or in the MAP-IE, and this can be used to maintain the routing structure. By combining CIDs with the routing for each connection, the routing structure can be updated and maintained easily along with CIDs, and the overall overheads for the routing can be reduced.

3 Partitioning of Integers


3.1 General Idea

To systematically assign CIDs to the MR-BS and RSs, the proposed CID allocation mechanism adopts the partitioning of the positive integers into subsets. In this section, we describe two methods of the partitioning of integers. This can be accomplished by factorization into bit partition, prime numbers [6], or into contiguous

1 blocks [7]. The idea is to map these subsets to nodes in a network (assumed to be a tree topology) which will
 2 assist in identifying the placement of the node in the tree.

3 Each node of the tree represents a subset of \mathbf{Z} , the set of all positive integers. The leaves of the tree are
 4 pairwise disjoint subsets of the integers. Each parent node is a superset of the union of its children. For
 5 example, in Figure 1, $B \supset (D \cup E)$ and $D \supset (H \cup J \cup K)$. The tree can grow; at a particular node, its children
 6 must satisfy two conditions. 1) the children must be subsets of the parent node; 2) the children are pairwise
 7 disjoint.

8 Due to this structure, any node (root, leaf, or intermediary) can determine whether a particular integer will
 9 exist in its subtree (with itself as the root). Intermediary nodes must distinguish between two types of integers;
 10 those that terminate at the node (terminal integers), and those that do not terminate at the node (non-terminal
 11 integers). We provide two examples of integer partitioning that assume only one terminal integer at each
 12 intermediary node, and briefly mention how multiple terminal integers (per intermediary node) can be attained.

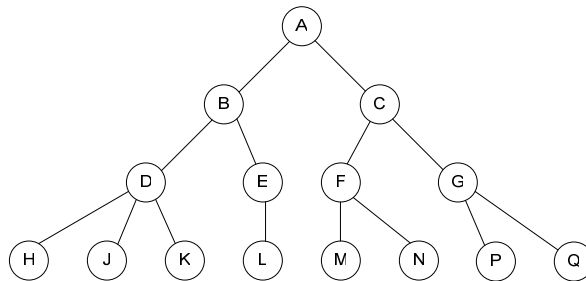


14
15
16 **Figure 1: an example of a network tree (an abstract model)**

17 3.2 Examples of integer partitioning: contiguous integer blocks

18 This is a simple implementation. The root node represents \mathbf{Z} . Each of its children (1st tier nodes) are
 19 assigned a contiguous range of \mathbf{Z} (and pairwise disjoint). For a particular 1st tier node (with range $[p_1, p_2]$), its
 20 children (2nd tier nodes) are each assigned a contiguous subset of $[p_1, p_2]$ (and pairwise disjoint). This process
 21 continues for the entire tree. In Figure 2a, we demonstrate how the tree in Figure 1 can partition the integers
 22 using contiguous integer block methods.

23 In Figure 2a, the terminal integers for nodes B, C, D can be set to 1000, 2000, and 400 respectively.
 24 Allowing multiple terminal integers per intermediary node is trivial.

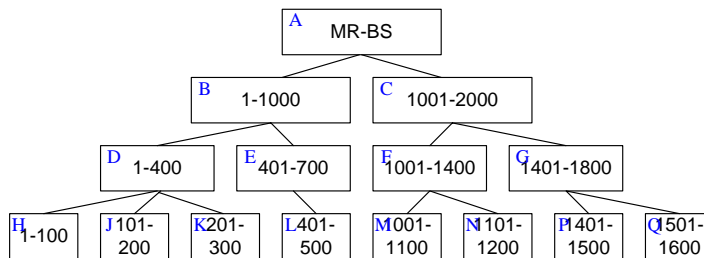

25
26 **Figure 2a: partitioning of integers using contiguous blocks. The choice of range length being multiples of**
 27 **100 is arbitrary.**
 28

3.3 Examples of integer partitioning: bit partition

Each decimal number could also be converted into a binary number. Assume there are at most 2^k RSs could associate with one RS or BS directly, k bits would be used to identify each RS in the same level. The 1st tier nodes that associate to the MR-BS directly would have CIDs with all possible number in lowest k bits. Their children (2nd tier nodes) is identified by left shifting k bits of parent CID and set lowest k bits. This process continues for the entire tree. In this manner, the CID (without leading 0s) of any RS will be the prefix of CIDs of all its subordinate RSs.

To convert these values into subsets of \mathbf{Z} (as discussed in Section 3.1) is simple; a n^{th} tier node will have a unique nk -bit sequence to identify itself, then the range this node could assign will be all numbers with this nk -bit sequence in the middle and begin with arbitrary number of "0"s as its prefix and with arbitrary combination of 0 and 1 as its suffix. The condition as set out in Section 3.1 is satisfied. We also demonstrate how the tree in Figure 1 can partition the integers using bit partition method in Figure 2b.

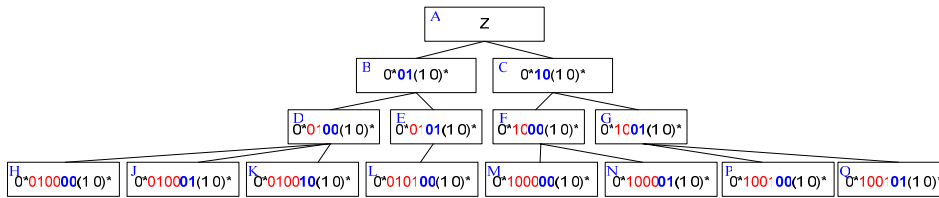


Figure 2b: partitioning of integers using bit partition.


Note that a simple way of allowing multiple terminal values at intermediary nodes is to merge nodes. For example, the logical nodes H and J can represent the same physical node.

4 CID Assignment

We describe the CID allocation for both contiguous integer partitioning method and bit partition method in the following. This structured CID assignment can be used to assign tunnel CIDs (i.e. CIDs terminating at an access RS), or RS and MS management CIDs. It can also be used to assign MS transport CIDs. Our examples describe the assignment of tunnel CIDs.

4.1 CID allocation using contiguous integer partitioning method

We perform this CID assignment scheme *ignoring the MS in the topology*. This method is compatible with the notion of encapsulating CIDs [9] or tunneling CIDs [8] or embedded MAP IE. [8].

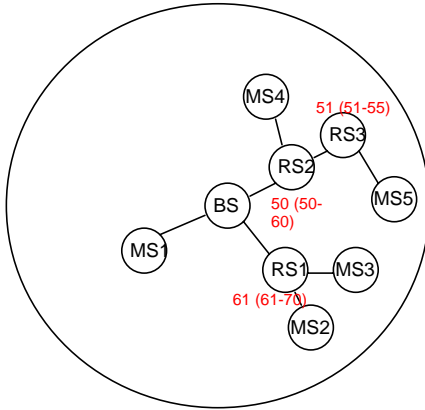

1
2 Figure 3: CID Assignment for 4.1

3
4 In Figure 3, the MR-BS indicates the range of CIDs that each RS is responsible for, as well as the CID for the
5 connection for each RS node. For each subordinate RS, the assigned CID range has to be a subset of its
6 connecting RS.

7
8 4.2 CID allocation using bit partition method

9 We first define a parameter 2^k to identify the maximum number of subordinate RSs that the MR-BS or a RS
10 could have. If $k=0$, each RS could only have one subordinate RS. For 1st-tier RSs, which connect to the MR-BS
11 directly, the MR-BS assigns IDs sequentially from 1 to 2^k as shown in Figure 4 by setting different values of the
12 lowest k bits of the ID. We only show the lowest 8 bits of CIDs in Figure 4. For other n-tier RSs, the MR-BS
13 left shifts k bits of its parent ID and sets the lowest k bits according to the arriving sequence of the RS. For
14 example, RS_T and RS_U comes one after another to associate with RS_Q (ID: 00 01 00 11) after RS_R and RS_S in
15 Figure 3. To assign an ID to RS_T , the MR-BS first perform left shift 2 bits of its parent ID and gets 01 00 11 00,
16 and then it sets the lowest 2 bits as 10 since it is the third RS that attaches to RS_Q . Similarly, the MR-BS assigns
17 01 00 11 11 to RS_U after RS_T .

18

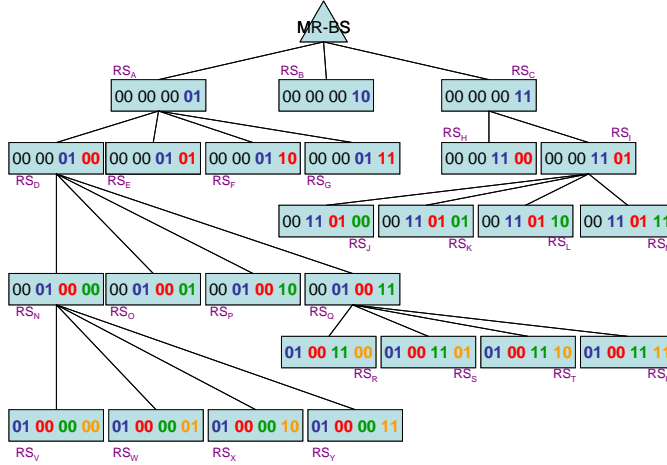


Figure 4: CID assignment for 4.2.

5 Relay Path Configuration

To utilize the proposed systematic CID allocation in relay path configuration, it is possible to use tunneling [8] [10] or non-tunneling solution [9]. In the following, we take bit partition method to describe tunneling relay path configuration and take integer contiguous method as an example for non-tunneling relay path configuration. Both methods could be applied two solutions of relay path configuration.

5.1 Examples of relay path configuration using tunneling solution

We take figure 5 for example. There are two MSs, which associate to RS L (CID: 00 01 01 00) and RS G (CID: 00 00 10 01), in the network. The MR-BS has records for these two MSs and knows their serving RSs. The whole relay path could be divided into two segments: from the source RS to the MR-BS and from the MR-BS to the destination RS. For upstream frames, each RS could easily know its parent CID by right shifting k bits of its own CID. For example, the CID of access RS L is 00 01 01 00, so its parent CID is 00 00 01 01 by right shifting 2 bits of its CID. For downstream frame received from its parent RS, the RS needs to determine if it should accept, forward, or discard the frame. When the tunneling [8] [10] is applied for relaying, the Tunnel CID could be set as the CID of destination RS. Each intermediate RS could compute if the destination RS belongs to its subordinate RSs by the algorithm in Figure 6. First of all, the RS compares if the destination CID is equal to its own CID and accepts the frame if these two CIDs are the same. If the match fails, it perform k -bit right shift of the destination CID and do the comparison with its own CID. If the shifted destination CID is the same as its own CID, it forwards the frame to its subordinate RS. Otherwise, it continues do the right shift and comparison for (maximal level-current level) times and discards the frame if all matches are failed. For example, RS C would know that RS G is its subordinate RS by right shifting the destination CID once.

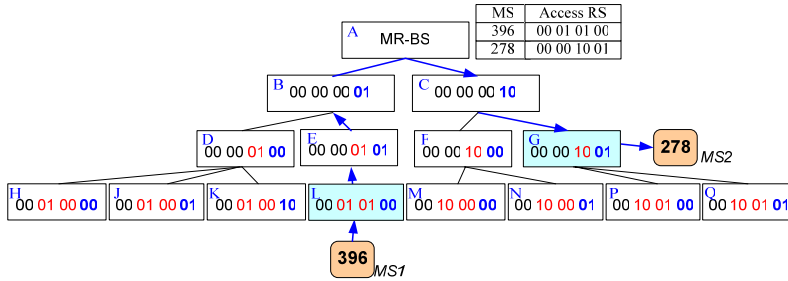


Figure 5: An example of relay path configuration using bit partition method.

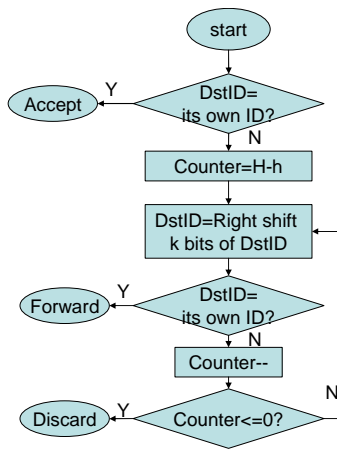


Figure 6: Subordinate RS differentiation algorithm


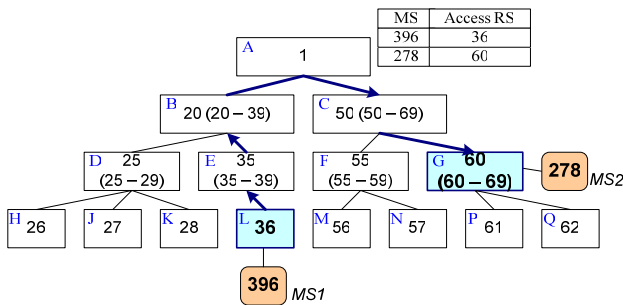


Figure 7: An example of relay path configuration using contiguous integer partitioning method. The number in parenthesis is the range of CIDs that the MR-BS could allocate to the subordinate RS.

Similarly with contiguous integer partitioning, the MR-BS keeps records of the access RS for each MS. For data directed towards MS2, the MR-BS sends the data to the access RS with CID 60. Since this CID belongs to the range of CID of the RS C, it forwards the data to the RS G. Meanwhile, the RS B ignores this data as the CID is not within its range. The similar procedure can be done on the uplink.

1 **5.2 Examples of relay path configuration using non-tunneling solution**

2 The following example, as shown in Figure 7, describes how the relay operation is performed if the same
 3 CID is maintained for every hop involved in the transmission. Relay involving the changing of CIDs, or relay
 4 involving encapsulation of CIDs [1] can be done in a similar manner.

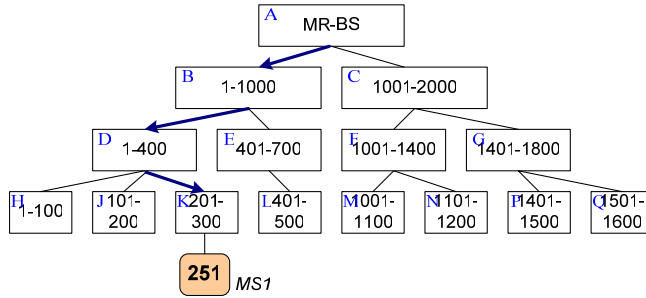

5
 6 **Figure 7: An example of relay path configuration using contiguous integer method.**
 7

8 Consider the transmission of a packet with CID 251. RS B decodes and forwards the message to RS D, and
 9 RS C ignores this transmission because the CID does not belong to its CID range 1001-2000. Then, RS D
 10 forwards the message to RS K in the same manner. RS K is able to decode and forward this packet because CID
 11 251 is within its forwarding range. Finally, the packet with CID 251 is received by MS 1. The uplink
 12 transmission from each MS can be delivered to BS through RS in a similar way.

13 Once the routing decision is made by the BS, CIDs of MS are assigned according to the procedures
 14 described above. Each RS only listens to the packets with CIDs which are within its CID range and ignores
 15 otherwise. This removes the necessity to maintain and broadcast routing information.

16 In addition, the handover of moving MS from one RS to another RS within a cell can be handled easily. For
 17 example, if MS 1 moves close to RS L and BS decides to serve MS 1 through RS L, then BS changes MS 1's
 18 CID from 251 to 405 directly. Then RS L knows automatically that it should detect and decode the packets for
 19 MS 1. This handover within a cell is done transparently to MS. In other words, MS only knows that BS changes
 20 its CID and does not know that the routing path has been changed. The BS can request the change of CID using
 21 BS-initiated DSC procedures as specified in subclause 6.3.14.9.4.2 of [2], which is summarized in Figure 8. A
 22 DSC-REQ is sent by BS to dynamically change the service flow (SF) parameters, including CID, of an existing
 23 SF according to the specified SFID. Once the SS receives the DSC-REQ and validates the request, the SF
 24 parameters will be changed and DSC-RSP will be sent by SS. After receiving the DSC-RSP, the BS will update
 25 the service flow profile accordingly, and send DSC-ACK to confirm. The whole procedure is completed once
 26 the SS receives DSC-ACK and finalizes the adjustment.

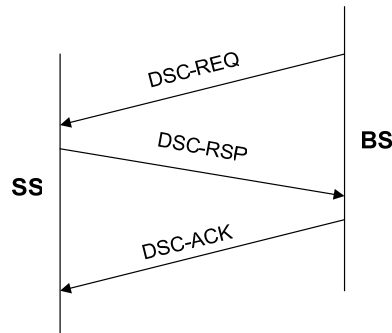


Figure 8: BS-initiated DSC.

CID ranges that have to be used by RS are assigned by BS and transmitted to RSs via CIDRNG-REQ and CIDRNG-RSP management messages as specified in Section 6.

6 Proposed Text


-----Beginning of Text Changes-----

格式化: 缩排: 第一行: 0 cm

[Add the following text into section 6.3.1.3]

6.3.1.3.1 Addressing Scheme for Relaying

In the procedure of network entry and initialization for a new RS, the MR-BS shall assign a range of CIDs for the new RS. The range could be contiguous integer blocks as in Figure 6.3.1.3.X (a) or bit partition as in Figure 6.3.1.3.X (b). In the bit partition assignment, the MR-BS sets the lowest k bits in ascending order to RSs for RSs associated to the MR-BS directly where the maximum number of RSs the MR-BS or a RS could serve is 2^k. For other level-n RSs, which need n hops to reach the MR-BS, the MR-BS left shifts k bits of its parent CID and sets the lowest k bits according to the arriving sequence of the RS.

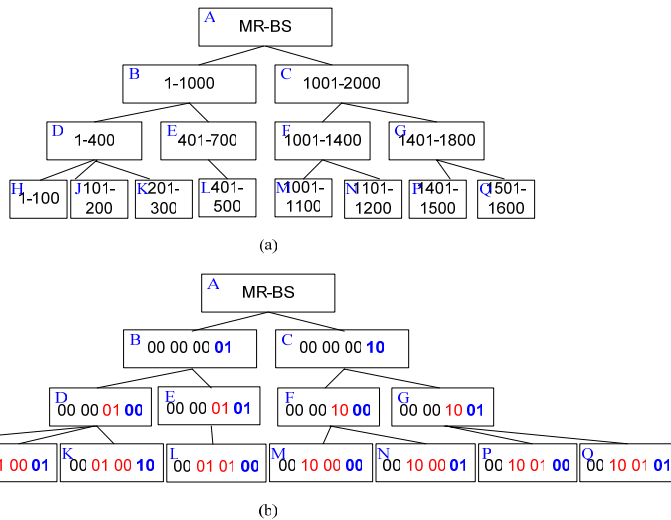

删除: If the topology changes due to some factors like load balancing or QoS management, RSs might change its preceding RS and the CID range could be updated during network re-entry time as shown in Figure 6.3.1.3.Y in two cases. Case 1: the selected preceding RS is the same as the temporary associated RS for initialization. The MR-BS determines the selected preceding RS still remains RS1 and sends a RLY_TPY-IND with original CID range to inform the unchanged of preceding RS (RS1) for the new RS. Case 2: the selected preceding RS is different from the temporary associated RS for initialization. The MR-BS determines the selected preceding RS is RS2 which is different from the temporary associated RS for initialization. It must issue the new CID range carried RLY_TPY-IND messages to the new RS. Upon receiving RLY_TPY-IND message, the temporary associated RS (RS1) shall forward the message to the new RS. Thereafter, the new RS shall start to associate with R...

Figure 6.3.1.3.Y: CID range allocation example, (a) contiguous integer block, (b) bit partition method.

6.3.2.3.6 Ranging response (RNG-RSP) message

Insert the following text at the end of the 6.3.2.3.6:

The following TLV parameter shall be included in the RNG-RSP message when transmitted during RS initial entry to the network. The MR-BS could assign the range of RSs.

Range of CID for RS

11.6 RNG-RSP management message encodings

Insert the following entries into Table 367:

Table 367 – RNG-RSP message encodings

删除: 6.3.2.3 MAC management messages [Insert the following text into Table 14.] Type ... [2] 格式化: Body, 左右对齐, 缩排: 第一行: 0.6 cm 格式化表格 格式化: 左右对齐, 缩排: 第一行: 0.6 cm 格式化: 缩排: 左: 0.6 cm 格式化: 缩排: 第一行: 0 cm 格式化: Body, 左右对齐, 缩排: 第一行: 0.6 cm 格式化: 缩排: 第一行: 0.6 cm 格式化表格

Name	Type	Length	Value	PHY
------	------	--------	-------	-----

	(1 byte)		(variable-length)	Scope
If(contiguous integer blocks){				
Start number of management CID for RS	xx	<u>2</u>		OFDMA
End number of management CID for RS	xx	<u>2</u>		OFDMA
↓				
If(bit partition){				
CID bit sequence	xx	<u>2</u>		OFDMA
↓				

← 格式化: 縮排: 第一行: 1 字元
 ← 格式化: 縮排: 第一行: 1 字元

6.3.25 Relay path management and routing

Each relay station is assigned a range of CIDs for which the relay is responsible for decoding and forwarding. The CID range is assigned by the MR-BS, and are transmitted to RSs via CIDRNG-REQ and CIDRNG-RSP management messages. During operation, the RS is only responsible for listening to CIDs transmitted within this range.

The BS is responsible for managing the entire CID range. Each RS connected to a parent node (BS or RS) is assigned a subset of the CIDs assigned to the parent node. These subsets are non-overlapping.

By assigning a CID to each service flow, the MR-BS already specifies the relay routing path of the connection.

刪除: [Add a new subclause 6.3.2.3.62] 6.3.2.3.62 CID Range Assignment Request (CIDRNG-REQ) message Table *** -- CIDRNG-REQ message format Syntax ... [3]

7 References

[1] IEEE C802.16j-06/004r1, "Recommendations on IEEE 802.16j".
 [2] IEEE 802.16-2004, "Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems".
 [3] IEEE 802.16e-2005, "Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems, Amendment 2: Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands and Corrigendum 1".
 [4] IEEE C802.16j-06/014r1, "Harmonized definitions and terminology for 802.16j Mobile Multihop Relay".
 [5] IEEE C802.16j-06/015, "Harmonized Contribution on 802.16j (Mobile Multihop Relay) Usage Models".
 [6] IEEE C802.16j-06/171, "Systematic relay station identification allocation and relay path configuration mechanism for IEEE 802.16j (Multi-hop Relay)".
 [7] IEEE C802.16j-06/253, "Route Update with Efficient CID Management".
 [8] IEEE C802.16j-06/274, "Proposal on addresses, identifiers and types of connections for 802.16j".
 [9] IEEE C802.16j-06/254, "Fast Connection Establishment and Maintenance with Relays".
 [10] IEEE C802.16j-06/170, "Connection Identification and Transmission for Relay Support"

If the topology changes due to some factors like load balancing or QoS management, RSs might change its preceding RS and the CID range could be updated during network re-entry time as shown in Figure 6.3.1.3.Y in two cases.

Case 1: the selected preceding RS is the same as the temporary associated RS for initialization. The MR-BS determines the selected preceding RS still remains RS1 and sends a *RLY_TPY-IND* with original CID range to inform the unchanged of preceding RS (RS1) for the new RS.

Case 2: the selected preceding RS is different from the temporary associated RS for initialization. The MR-BS determines the selected preceding RS is RS2 which is different from the temporary associated RS for initialization. It must issue the new CID range carried *RLY_TPY-IND* messages to the new RS. Upon receiving *RLY_TPY-IND* message, the temporary associated RS (RS1) shall forward the message to the new RS. Thereafter, the new RS shall start to associate with RS2.

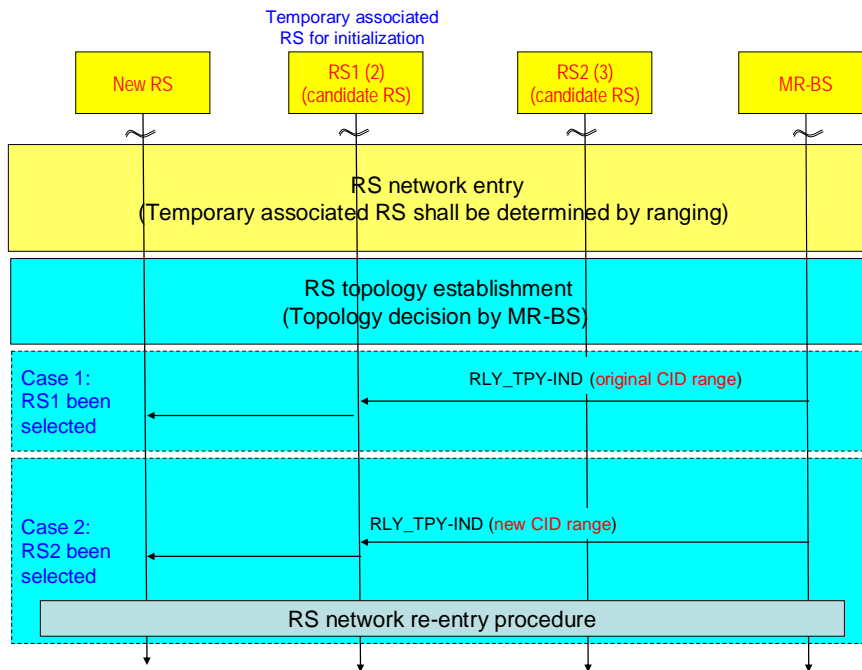


Figure 6.3.1.3.Y: CID range allocation Message flow of a new RS during network re-entry time

6.3.2.3 MAC management messages

[Insert the following text into Table 14.]

Type	Message name	Message description	Connection
------	--------------	---------------------	------------

67	CIDRNG-REQ	CID range assignment request	Basic
68	CIDRNG-RSP	CID range assignment response	Basic
69	RLY_TPY-IND	Relaying mode RS topology indication	Basic

[Add a new subclause 6.3.2.3.62]

6.3.2.3.62 CID Range Assignment Request (CIDRNG-REQ) message

Table *** -- CIDRNG-REQ message format

Syntax	Size	Notes
CIDRNG-REQ message format {	–	–
Management Message Type = 67	8 bits	Type = 67
If(contiguous integer blocks){		
CID min	16 bits	The minimum value of CID
CID max	16 bits	The maximum value of CID
}		
If(bit partition){		
CID bit sequence	16 bits	The CID for this RS
}		
}		

[Add a new subclause 6.3.2.3.63]

6.3.2.3.63 CID Range Assignment Response (CIDRNG-RSP) message

Table *** -- CIDRNG-RSP message format

Syntax	Size	Notes
CIDRNG-RSP message format {	–	–
Management Message Type = 68	8 bits	Type = 68
Confirmation	1 bit	1: the CID range has been changed successfully 0: error
<i>Reserved</i>	7 bits	Shall be set to zero
}		

[Add a new subclause 6.3.2.3.64]

Relaying mode RS topology indication (*RLY_TPY-IND*) message

An MR-BS shall transmit a RLY_TPY-IND message for indicating what the suitable preceding RS is and indicating the CID for new RS, and then trigger the network re-entry. A RLY_TPY-IND message may also be transmitted to the selected preceding RS for the notification that a new RS with CID descending from this preceding RS.

Table 6.3.2.3.X—*RLY_TPY-IND* message format

Syntax	Size	Notes
RLY_TPY-IND_Message_format(){	—	—
Management Message Type=69	8 bits	Type=69
Target_Station_ID	48 bits	—
Preamble_Index/Subchannel Index	8 bits	This parameter defines the OFDMA PHY specific preamble
HO process optimization	8 bits	HO Process Optimization is provided as part of this message is indicative only. HO process requirements may change at time of actual HO. For each Bit location, a value of '0' indicates the associated reentry management messages shall be required, a value of '1' indicates the reentry management message may be omitted. Regardless of the HO Process Optimization TLV settings, the target Station may send unsolicited SBC-RSP and/REG-RSP management messages: Bit #0: Omit SBC-REQ/RSP management messages during re-entry processing Bit #1: Omit PKM Authentication phase except TEK phase during current re-entry processing Bit #2: Omit PKM TEK creation phase during re-entry processing Bit #3: Omit REG-REQ/RSP management during current re-entry processing Bit #4: Omit Network Address Acquisition management messages during current re-entry processing Bit #5: Omit Time of Day Acquisition management messages during current reentry processing Bit #6: Omit TFTP management messages during current re-entry processing Bit #7: Full service and operational state transfer or sharing between serving station and target station (ARQ, timers, counter MAC state machines, etc...)
If(contiguous integer blocks){		
CID min	16 bits	The new minimum value of CID range
CID max	16 bits	The new maximum value of CID range
}		
If(bit partition){		
CID bit sequence	16 bits	The new CID for this RS
}		
Padding	variable	If needed for alignment to byte boundary
TLV encoded information	variable	—
}	—	—