

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Location Based Services	
Date Submitted	2006-07-20	
Source(s)	Joey Chou Jose P Puthenkulam Intel Corporation	[mailto:joey.chou@intel.com] [mailto:jose.p.puthenkulam@intel.com]
Re:		
Abstract	This contribution proposes mechanisms in supporting location based services.	
Purpose	Adoption	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."</p> <p>Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:r.b.marks@ieee.org> as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>	

Table of Content

1. Introduction..... 4
2. Location Based Services..... 4

1

1

2 1. Introduction

3 Location Based Services (LBS) is a new breed of wireless services that promises service
4 differentiation and increasing revenue for mobile network operators. LBS typically includes location
5 based information, location based billing, and emergency services that has been a FCC's mandate
6 for supporting Emergency 911 services. All these LBS requires the provision of mobile station
7 location to network providers.

8 2. Location Based Services

9 This contribution proposes text to be adopted in 802.16g in order to support location based
10 services..

11

12 3. Definitions

13 *[Insert a new definition:]*

14

15 **3.89 Location Based Services (LBS):** Services that are provided through the use of MS location
16 data. Examples of LBS include includes location based information, location based billing,
17 navigation, emergency services, and equipment tracking in the field.

18

19 6. MAC Common Part Sublayer

20 *[Insert a new subclause:]*

21

22 6.3.26 Location Based Services

23 This subclause provides mechanisms to coordinate the collection, generation, and reporting of
24 location information (e.g. RSSI, CINR, Time Difference of Arrival (TDOA), Time of Arrival (TOA), ...)
25 that may be used to calculate MS locations.

26

27

28 6.3.26.1 Time Difference of Arrival

29 TDOA scheme measures the difference of time arrival for packet transmission between a MS and
30 multiple BSs. There are two types of TDOA – Downlink TDOA (D-TDOA) and Uplink TDOA (U-
31 TDOA) that are measured in MS and BS, respectively.

- 32 • D-TDOA – MS may report D-TDOA data in the Relative Delay parameter in MOB_SCN-
33 REP message that indicates the delay of DL signals from neighbor BS relative to the
34 serving BS. MOB_SCN-REP also reports RSSI and CINR of SL signals from neighbor BS
35 that can be used for MS location estimation. During SBC-REQ/RSP negotiation, HO
36 Trigger metric support (see 11.8.7) indicates which trigger metric that MS support.
- 37 • U-TDOA – As oppose to D-TDOA that is reported each time MS scanning is completed,
38 T-TDOA enables BS to initiate T-TDOA measurement when it is needed. Basically,
39 serving BS initiates T-TDOA measurement by sending autonomous MOB_SCN-RSP
40 with scanning type = 0b10 (scan association with coordination) to force MS

1 performing initial ranging after scan. Annex I shows how U-TDOA data can be
 2 measured through the coordination between MS, serving BS, and non-serving
 3 BSs.

4
 5 **6.3.2.3.47 Neighbor Advertisement (MOB_NBR-ADV) message**

6
 7 *[Insert BS Geo Location TLV to Table 109f:]*

8 **Table 109f—MOB_NBR-ADV message format**

Syntax	Size	Note
For (j=0 ; j<N_NEIGHBORS ; j++) {	—	---
Length	8 bits	Length of message information within the iteration of N_NEIGHBOR in bytes.
PHY Profile ID	8 bits	Aggregated IDs of Co-located FA Indicator, FA Configuration Indicator, FFT size, Bandwidth, Operation Mode of the starting subchannelization of a frame, and Channel Number.
BS Geo Location TLV	15 bytes	BS geo location to be used for MS location estimation.
:		
}		

9
 10 *[Insert the following subclause:]*

11 **BS Geo Location TLV (see 11.23.1)**
 12 It contains BS geo location in Latitude, Longitude, and altitude that will be used for MS
 13 location estimation.

14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34

1 *[Insert annex I:]*

2

3 **Annex I U-TDOA measurement**

4 Figure I.1 shows a network diagram for U-TDOA measurement.

5

6

7

8

9

10

11

12


13

14

15

16

17

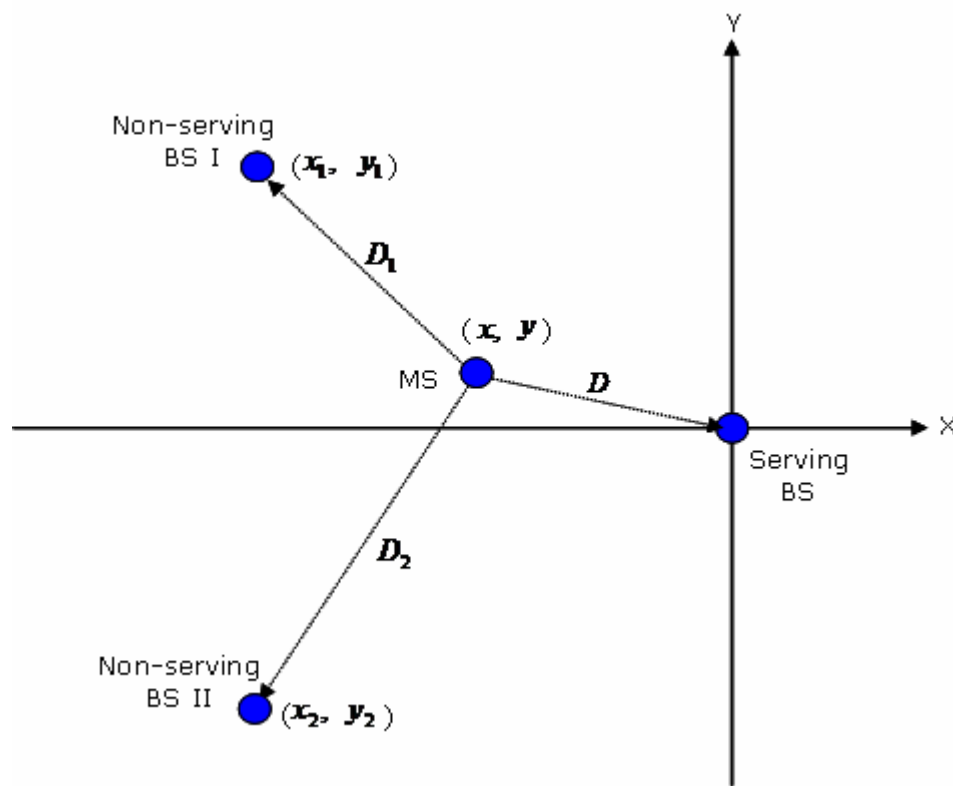

18

Figure I.1: Network Diagram for U-TDOA Measurement

19

20

21

22

23

24

25

26

27

28

29

Figure I.2 shows the timing diagram of U-TDOA measurement. t_1 is the Timing Advance. t_2 and t_3 are the intervals between the time of burst arrival and the beginning of granted slot for Serving BS and Non-serving BS 1 respectively. t_2 and t_3 are also the Timing Adjustments that BS will ask MS to adjust the timing advance when transmitting the next UL burst. BS calculates t_2 and t_3 during the ranging process.

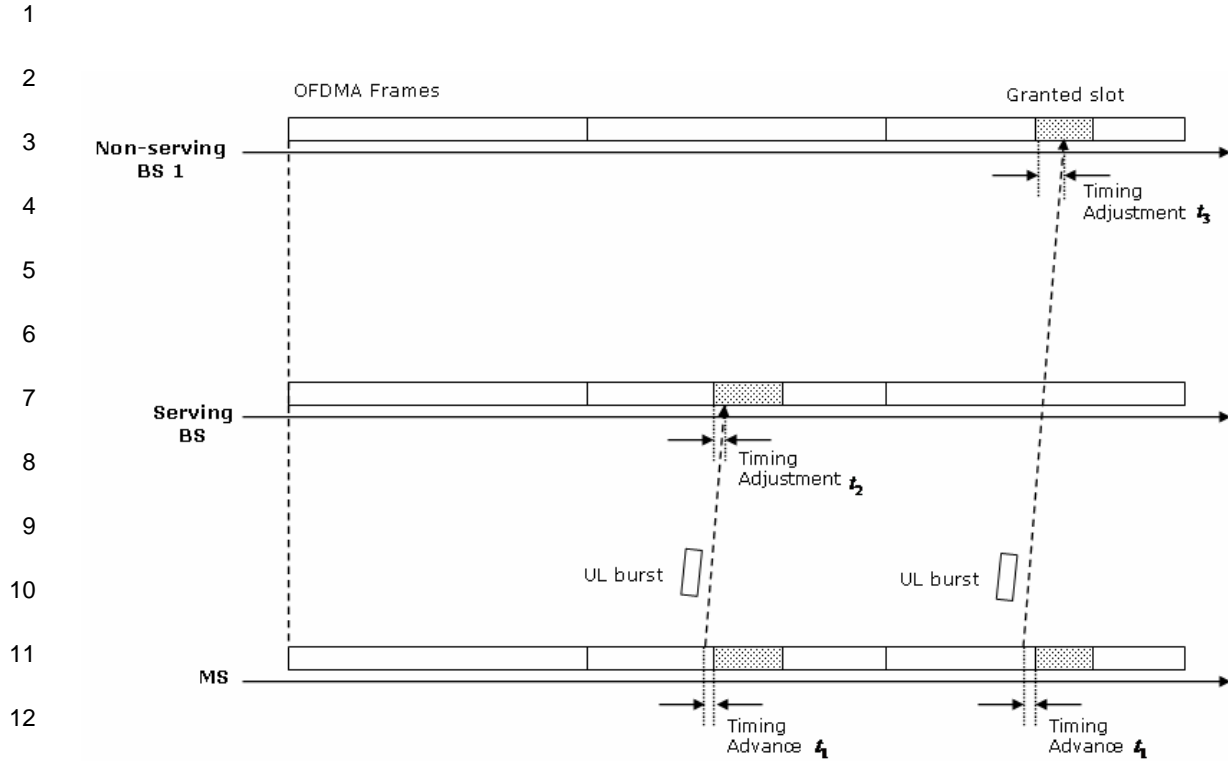


Figure I.2: U-TDOA Measurement Timing Diagram

The propagation delay for serving BS and non-serving BS 1 can be derived from the equation below, assuming the frames of serving BS and non serving BS are synchronized. The U-TDOA can be measured even before the MS is successfully ranged. The propagation delay for non-serving BS II can be obtained from the same approach.

Propagation delay MS \rightarrow serving BS $\frac{D}{C} = t_1 + t_2$ (1)

Propagation delay MS \rightarrow non-serving BS $\frac{D_1}{C} = t_1 + t_3$ (2)

Therefore, TDOA T_1 can be shown as follows:

$$T_1 = (t_1 + t_2) - (t_1 + t_3) \quad (3)$$

Figure I.3 shows the U-TDOA measurement algorithm that includes a non-serving BS. The algorithm can be duplicated to support additional non-serving BS. Here are the assumptions for the algorithm.

- The neighboring sectors of serving BS and non-serving BS are operating on the different band.
- Serving BS and non-serving BS are operating on the same frame duration
- The frames in both serving BS and non-serving BS are synchronized
- MS can communicate with both serving BS and non-serving BS

1
2
3
4
5
6
7
8
9
10
11
12
13
14

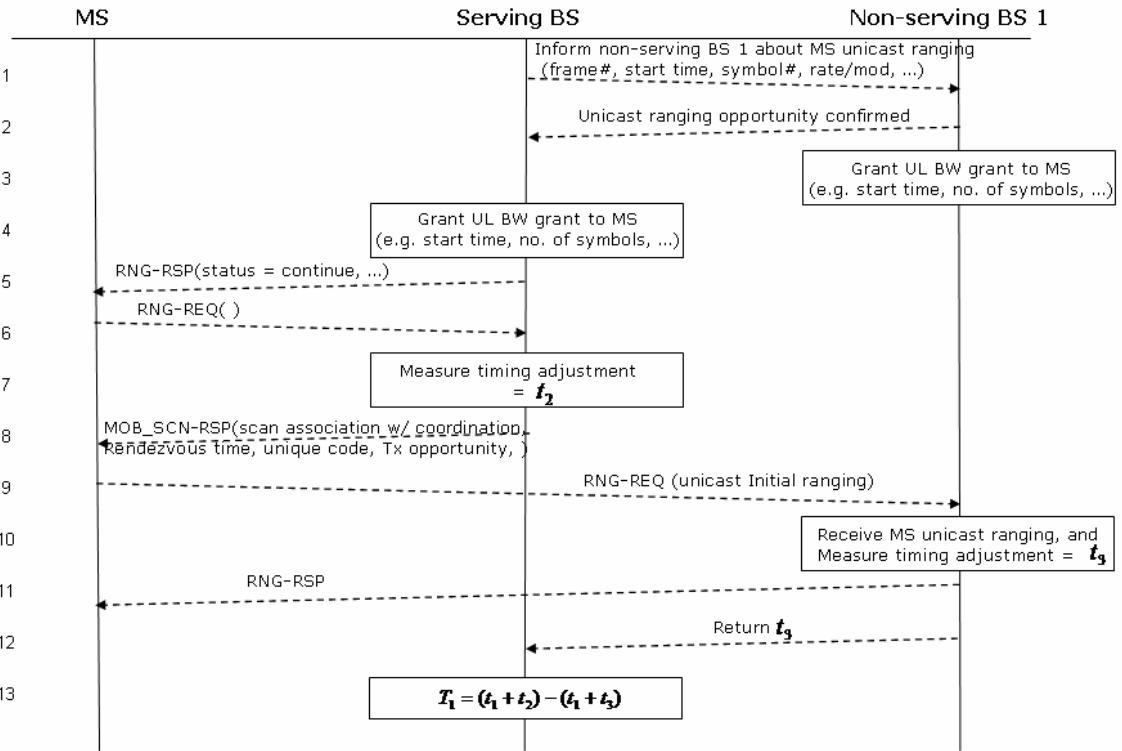


Figure I.3: U-TDOA Measurement Algorithm

15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

1. Serving BS informs non-serving BS 1 about MS is going to do unicast ranging by passing frame number, start time, number of symbols, ...
2. Non-servicing BS 1 confirms unicast ranging opportunity for MS
3. Non-serving BS 1 grant such UL slot to the MS
4. Serving BS allocates a UL slot for MS to do unicast ranging.
5. Serving BS sends an autonomous RNG-RSP message to ask MS performing unicast ranging
6. When MS receives the RNG-RSP from serving BS, it shall send RNG-REQ at the assigned slot
7. Serving BS 1 measures Timing Adjustment t_2
8. Serving BS sends autonomous MOB_SCN-RSP with scanning type = 0b10 (scan association with coordination) to force MS performing initial ranging after scan
9. MS synchronizes with non-serving BS 1, and sends RNG-REQ
10. Non-serving BS 1 receives unicast ranging, and measures Timing Adjustment t_3
11. Non-serving BS returns RNG-RSP to MS
12. Non-serving BS returns t_3 to serving BS

1 13. Serving BS reads the Timing Advance t_1 that was captured previously, and calculates U-
2 TDOA $T_1 = (t_1 + t_2) - (t_1 + t_3)$

3

4

5

