

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	MS Periodic Ranging in Non-transparent RS System under Centralized Scheduling	
Date	2006-03-05	
Submitted		
Source(s)	<p>Kanchei (Ken) Loa, Yi-Hsueh Tsai, Chih-Chiang Hsieh, Yung-Ting Lee, Hua-Chiang Yin, Shiann-Tsong Sheu, Frank C.D. Tsai, Youn-Tai Lee, Heng-Iang Hsu Institute for Information Industry 8F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan.</p> <p>Hang Zhang, Peiying Zhu, Mo-Han Fong, Wen Tong, David Steer, Gamini Senarath, Derek Yu, Mark Naden, G.Q. Wang Nortel 3500 Carling Avenue Ottawa, Ontario K2H 8E9</p> <p>Yu Ge, Peng-Yong Kong, Chen-Khong Tham 21 Heng Mui Keng Terrace Singapore 119613</p> <p>[add co-authors here]</p>	<p>Voice: +886-2-2739-9616 loa@iii.org.tw</p> <p>Voice: +1 613 7631315 WenTong@nortel.com pyzhu@nortel.com</p> <p>Voice: +65-6874.1950 Fax: +65-6775.5014 geyu@i2r.a-star.edu.sg</p>
Re:	IEEE 802.16j-07/007r2: "Call for Technical Comments and Contributions regarding IEEE Project 802.16j"	
Abstract	This contribution proposes procedures for MS periodic ranging in non-transparent RS under Centralized Scheduling	
Purpose	Text proposal for 802.16j Baseline Document	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it	

may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:chair@wirelessman.org> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>
------------------------------------	--

MS Periodic Ranging in Non-transparent RS System (under Centralized Scheduling)

Introduction

This contribution describes MS periodic ranging in non-transparent RS system under centralized scheduling scheme. In order to facilitate the incorporation of this proposal into IEEE 802.16j standard, specific changes to the baseline working document IEEE 802.16j-06/026r2 are listed below.

Text Proposal

6.3.10 Ranging

6.3.10.3 OFDMA based ranging

6.3.10.3.4 Relaying support for OFDMA based ranging

6.3.10.3.4.2 MS periodic ranging and automatic adjustments in non-transparent RS systems

The periodic ranging process shall begin by sending a periodic-ranging CDMA ranging code on the UL allocation dedicated for that purpose.

6.3.10.3.4.2.1 Non-transparent RS with Centralized Scheduling

When RS receives the CDMA code, RS shall locally send RNG-RSP to MS on the access link. In order to send RNG-RSP to MS on the access link, it sends a RS BR header to the MR-BS. Upon receipt of RS BR header at MR-BS, MR-BS will allocate resources for RNG-RSP and indicate to RS with RS_DL_MAP-IE in DL-MAP.

When the RS receives multiple codes in a frame resulting in continue status, the RS sends a RS BR header which contains information of number of received codes

The message sequence charts (Table 364 and Table xxx) and flow charts (Figure xxx and Figure yyy) define the periodic ranging and adjustment process that shall be followed by compliant RSs and MR-BSs.

Table xxx: Ranging and automatic adjustment procedure in non-transparent RS systems (centralized)

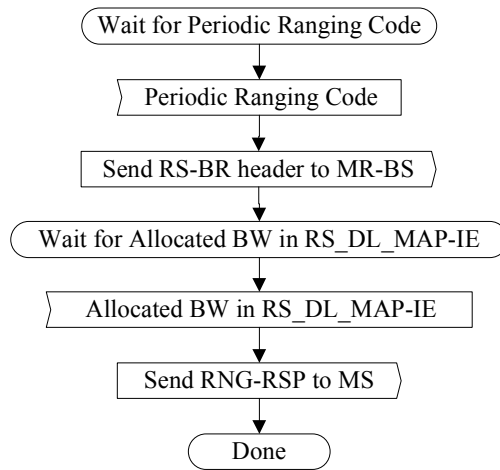
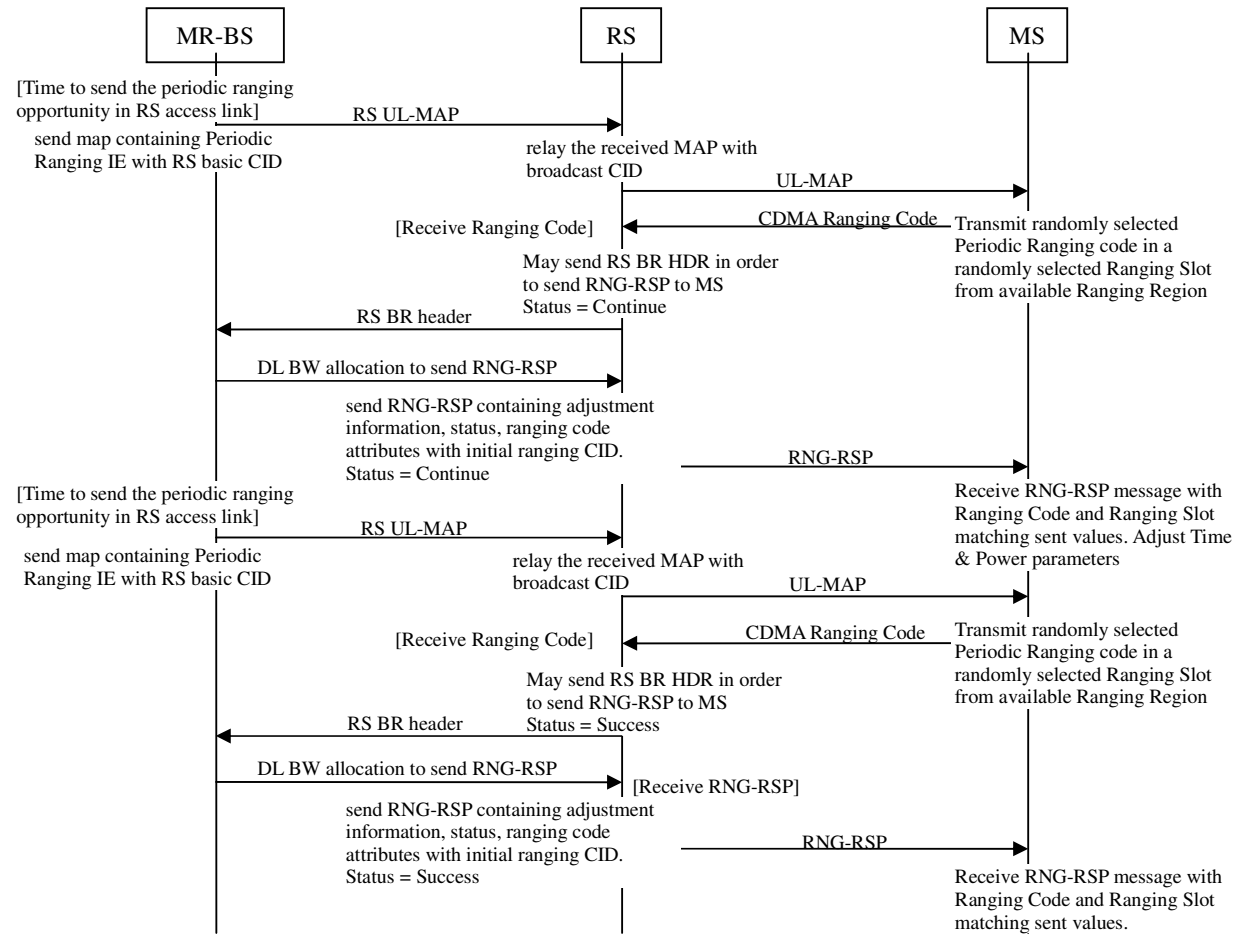


Figure xxx MS CDMA-based periodic ranging in non-transparent RS systems – Access Non-transparent RS

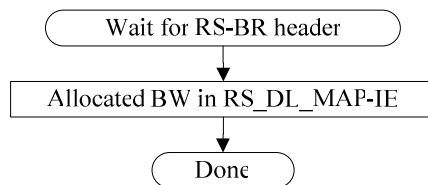


Figure yyy MS CDMA-based periodic ranging in non-transparent RS systems – MR-BS

6.3.10.3.4.2.2 Non-transparent RS with Distributed Scheduling

[This subclause is just a place holder. The contents are in a different contribution.]

Insert the following rows into Table 364 at 11.5 RNG-REQ TLV:

Table 364—RNG-REQ message encodings

Name	Type (1 byte)	Length	Value (variable-length)	PHY Scope
<u>Received Ranging Codes</u>	<u>TBA</u>	<u>Variable</u>	<u>Received Ranging Codes is a compound TLV value that indicates received code information.</u>	<u>OFDMA</u>
<u>Timing Adjust</u>	<u>TBA.1</u>	<u>4</u>	<u>Tx timing offset adjustment (signed 32-bit). The amount of time required to adjust SS transmission so the bursts will arrive at the expected time instance at the BS. Units are PHY specific (see 10.3).</u>	<u>OFDMA</u>
<u>Power Level Adjust</u>	<u>TBA.2</u>	<u>1</u>	<u>Tx Power offset adjustment (signed 8-bit, 0.25 dB units). Specifies the relative change in transmission power level that the SS is to make in order that transmissions arrive at the BS at the desired power. When subchannelization is employed, the subscriber shall interpret the power offset adjustment as a required change to the transmitted power density.</u>	<u>OFDMA</u>
<u>Offset Frequency Adjust</u>	<u>TBA.3</u>	<u>4</u>	<u>Tx frequency offset adjustment (signed 32-bit, Hz units). Specifies the relative change in transmission frequency that the SS is to make in order to better match the BS. (This is fine-frequency adjustment within a channel, not reassignment to a different channel.)</u>	<u>OFDMA</u>
<u>Ranging Status</u>	<u>TBA.4</u>	<u>1</u>	<u>Used to indicate whether uplink messages are received within acceptable limits by BS. 1 = continue, 2 = abort, 3 = success</u>	<u>OFDMA</u>
<u>Ranging code attributes</u>	<u>TBA.5</u>	<u>4</u>	<u>Bits 31:22 – Used to indicate the OFDM time symbol reference that was used to transmit the ranging code. Bits 21:16 – Used to indicate the OFDMA subchannel reference that was used to transmit the ranging code. Bits 15:8 – Used to indicate the ranging code index that was sent by the SS. Bits 7:0 – The 8 least significant bits of the frame number of the OFDMA frame where the SS sent the ranging code.</u>	<u>OFDMA</u>