

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	The management operations Multicast for Multi-RSs when using Tunnel CID
Date	2007-05-09 2007-04-24 30
Submitted	
Source(s)	Chie Ming Chou, Tzu-Ming Lin, Fang-Ching Ren, Wern-Ho Sheen, I-Kang Fu chieming@itri.org.tw Industrial Technology Research Institute (ITRI) / National Chiao Tung University (NCTU) 195,Sec. 4, Chung Hsing Rd. Chutung, Hsinchu, Taiwan 310, R.O.C
Re:	IEEE 802.16j-06/034:“Call for Technical Proposals regarding IEEE Project P802.16j”
Abstract	This contribution describes how to perform multicasting management operation for multi-RSs in <u>one</u> tunneling connection
Purpose	Propose method of multicasting operations for support managing multi-RSs in <u>one</u> tunneling connection
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

1 Multi-cast The management operations for multi-RSs when using Tunnel 2 CID

3

41. Introduction

5 To utilize the radio resources for MR network, the concept of “tunnel” is introduced to reduce the MAC
6 overhead and process in the relay link [1]. There are two modes for tunnel connections. In Tunnel Burst
7 mode, only station at egress of tunnel would read the encapsulated MPDU and other stations along tunnel
8 would directly forward MPDU after decoding the MAP_IE with destination T-CID. Alternatively, in Tunnel
9 Packet mode, every station along tunnel would receive the encapsulated MPDU and read the relay MAC
10 header to see whether a T-CID is placed or not. If a destination T-CID is appeared, intermediated stations
11 would forward the MPDU without reading payload and only station at egress of tunnel would read the
12 contents of payload.


13

14 In MR network, MR-BS always needs to control and manage several RSs at the same time. Compared to
15 unicasting identical control message for every RS individually, the usage of multicasting-transmitting control
16 message by MR-BS to multi-RSs within one tunnel connection will be more suitable and efficient. In this
17 contribution, we propose to perform multicasting-along-tunnel these operations by Tunnel Packet mode. With
18 this scheme, it can achieve multicasting-along-tunnel-connection-with perform the management operations
19 for multi-RSs with less processing overhead and resources.

20

212 Proposal


22 To support multicasting-managing multi-RSs within one tunnel connection, every station along this tunnel
23 shall be responsible to forward the encapsulated MPDU to next-hop station and read the associated payload
24 (control message) until the egress of tunneling. When systematic T-CID allocation is used, it is unable to
25 assign a common systematic multicast CID for the multicast group multi-RSs. Instead, establishing multiple
26 unicast connections with different systematic T-CIDs is employed. Figure 1 shows this case and it can be
27 observed that a lot of resources are wasted. Alternatively, if explicit path management is used (non-
28 systematic T-CID allocation), and then a common multicast-CID can be assigned for the members of
29 multicast group; however all RSs along a tunnel. However, multicast routing tables shall be maintained for
30 members of multicast group intermediate RSs and conduct them forward the multicasest these packets.
31 Figure 2 shows this case and it can be founded that it needs a lot of overhead.

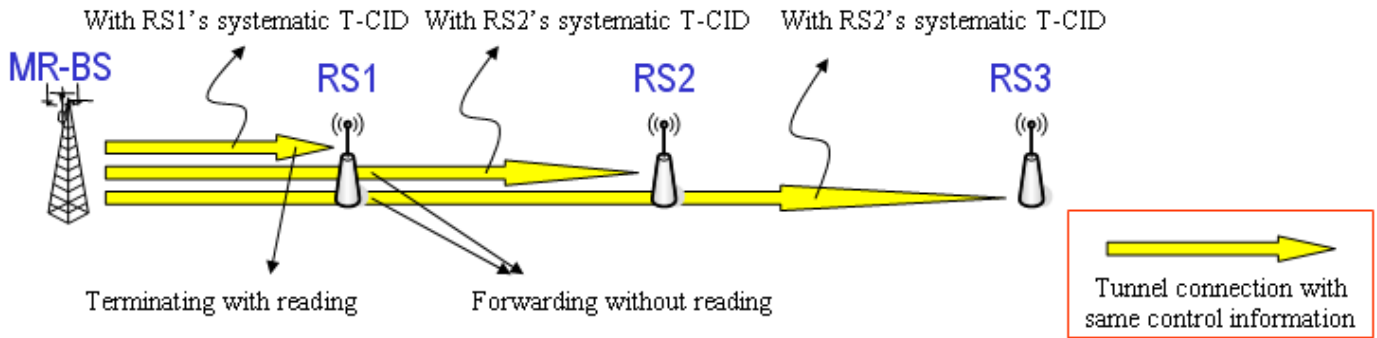

1

2 Figure 1, an example of multicasting management operations for multi-RSs when systematic CID is used

3

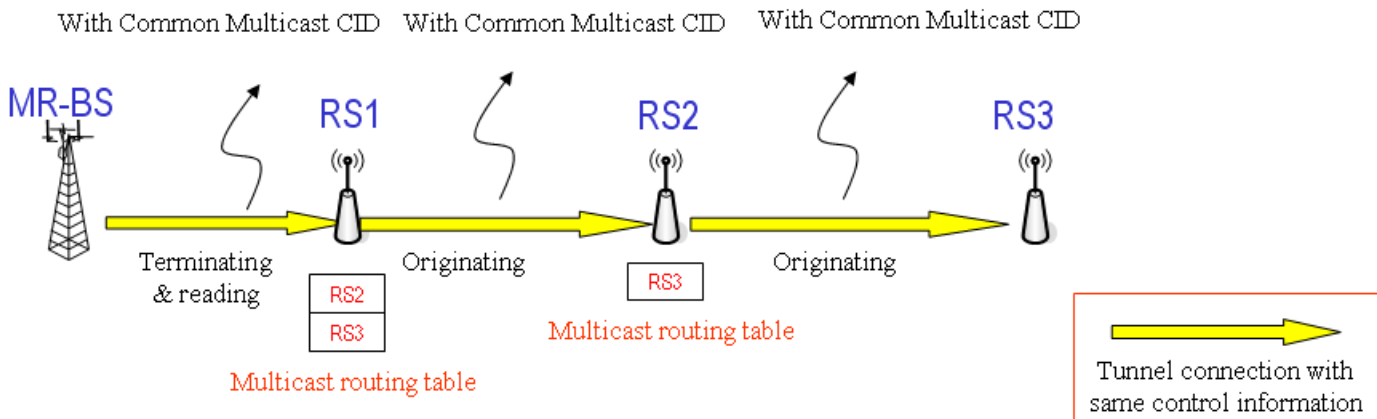

4

5 Figure 2, an example of management operations for multi-RSs multicasting when non-systematic CID is used

6

7

8 To avoid these problems, a refinement of Tunnel Packet mode is proposed. We will endow the relay MAC

9 header with an additional functionality: One bit called Ownership type in relay MAC header will be used to

10 indicate whether intermediated station needs to read the contents of payload or not after its forwarding. The

11 total operations are as follow: one tunnel connection with last-hop station's T-CID (can be systematic or

12 non-systematic) is used and "Ownership type" bit in the header will be set to '1' to indicate intermediate

13 RSs to read and forward the payload (the contents of payload shall be all read or all not be read by


14 intermediate RSs) can realize the multicasting along this tunnel at once time. An example of the proposed

15 scheme is shown in Figure 3. With this application, to ensure the CMAC/HMAC validation, a general

16 method is assigning a group key for multi-RSs in advance. When intermediate RSs check "Ownership type"

17 bit be enabled (set to '1'), then it will use this group key for this PDU. Besides, other new security

18 approaches for IEEE 802.16j may be also employed (TBD) in this method.

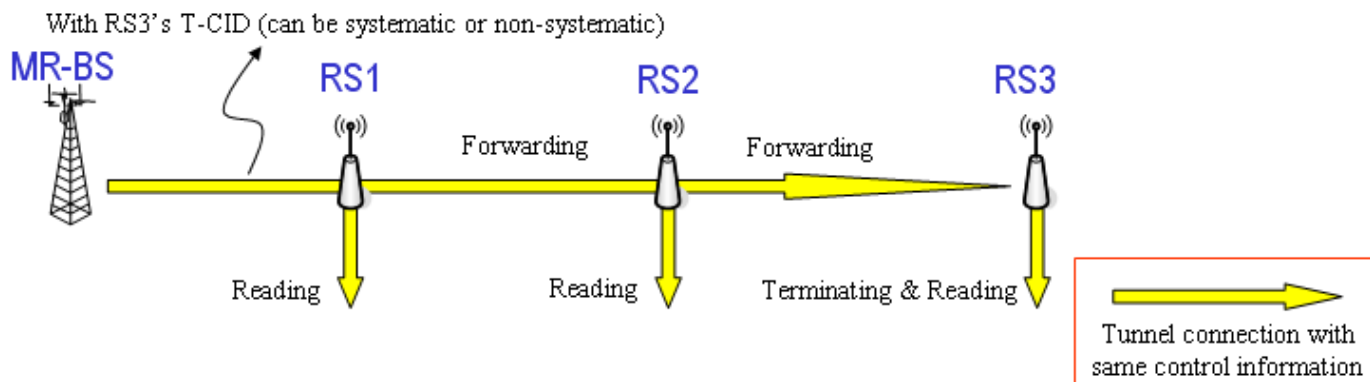

1
2 Figure 3, Perform management operations for multi-RS multicasting by proposed scheme

3 This scheme provides following benefits:

- 4
- 5 ➤ More efficient transmission – ~~the radio resources regarding multicasting~~ Transmission for multi-
 - 6 RSs can be achieved by one tunnel connection within less radio resources.
 - 7 ➤ Less signaling overhead– with this scheme, no additional siganling is required to maintain ~~the~~
 - 8 ~~multicasting~~-routing tables for management operations of multi-RSs.
- 9

HT header=0 (1)	Reserved (1)	RMI (1)	Reserved (7)	Priority (3)	Length MSB (3)
LSB Length (8)			MSB CID (8)		
LSB CID (8)			HCS (8)		

10
11 Figure 1. Relay MAC header format with proposed 3-bit “priority field”

13
14
15 **Proposed Text Change**

16
17 -----Start of the Text-----

18
19 [Add following text into session 6.3.3.8.1]

16.3.3.8.1 Transmission using tunnels

2For ~~multicasting control message~~ managing multi-RSs along a tunnel path, the MR-BS can arrange a tunnel
 3connection by Tunnel Packet mode. In this relay MAC header, the T-CID of last-hop station would be placed
 4and the “Ownership_type” bit would be set to “1” to let intermediate RSs along this tunnel can forward and
 5read the associated management message.

6

7[Add the following text to the end of 6.3.2.1.1.1; please refer to C802.16j-07_198r8]

86.3.2.1.1.1 Relay MAC PDU header format

9For ~~managing operations of multi-RSs when using Tunnel CID, the bit #1 (2th MSB in the header) in the~~
 10~~first byte of relay MAC header is used as “Ownership type”.~~ If this the bit “Ownership_type” is set to “1”,
 11the intermediate RS shall read the associated ~~payload~~ management message. For example, DSX-* message
 12used for end-to-end signaling and RNG-REQ/RSP used for initial topology discovery.

13

14[Mark one of the reserved bit as “Ownership_type” bit in figure 19b proposed in C802.16j-07/198r8]

15

HT=0 (1)	RSV (+) <u>Ownership</u> (1)	RMI (1)	RSV (5)
RSV (5)		LEN (3)	
LEN LSB (8)			
CID #0 (MSB) (8)			
CID #0 (LSB) (8)			
HCS (8)			

16

Figure 19b – Header format of relay MAC PDU with payload

17

18-----End of the Text-----

19

20

21References

22[1] IEEE 802.16j-06/026r3, “P802.16j Baseline Document”.

23[2] IEEE C802.16j-06/241r5, “Connection Management and Relay Path Configuration”.

24