

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >
Title	<b>A codebook addressing approach to reduce the index bit for MIMO pre-coding</b>
Date Submitted	<b>2005-01-11</b>
Source:	Wen Tong, Ming Jia, Hua Xu, Dongsheng Yu, Jianglei, Ma, Peiying Zhu, Mo-Han Fong, Hang, Zhang and Brian Johnson Voice: (613)-763-1315 Fax: (613)-765-7723 <a href="mailto:wentong@nortelnetworks.com">wentong@nortelnetworks.com</a> Nortel Networks 3500 Carling Avenue Ottawa, ON. K2H 8E9 CANADA
Re:	IEEE 802.16-REVe/D5a, BRC recirc
Abstract	Propose to use the differential index addressing the codebook with large number of code-words
Purpose	To incorporate the changes here proposed into the 802.16e/D5a draft.
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.

# A codebook addressing approach to reduce the index bit for MIMO pre-coding

## 1 Introduction

The code-book size of an optimized unitary pre-coding code book determines the pre-coding loss. The large the codebook size the less the pre-coding loss. However, the large code book requires large amount of feedback resource to signaling the codeword index. In this contribution we propose to reduce the feedback for large codebook index signaling by exploit the correlation properties for the code words in a sub-space of the code book. In general, only a sub-set of the code words possess high correlation with a given code word. For OFDMA signal, there exists a very high MIMO channel correlation in either time direction or frequency direction, in this case, if we re-range the word-word addressing such that for any code word, the highly the correlated code words can be addressed by a small offset against its address index.

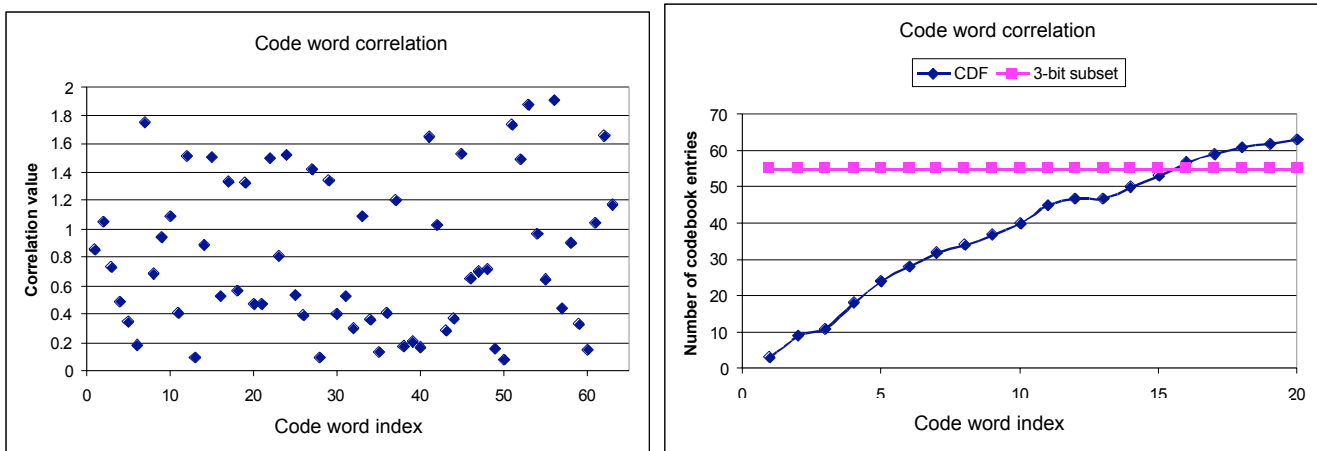


Figure 1. (Left) typical code word correlation vs addressing indexing, (Right) Correlation based addressing. As we can see for a 64 code words code-book, given a codeword, only 8 code-words are highly correlated. In this case, the proposed addressing method can reduce the code word feedback index from 6 to 3.

## 2 Proposed Text Change

*Insert text in section 8.4.8.3.6*

----- Start text -----

These unitary precoding matrices are quantized according to a code book described below. Let  $L=64$  denote the total number of entries in the codebook. Given a  $2 \times M_t$  matrix  $U = [I \ U']$ ,  $M_t \times M_t$  diagonal matrices

$$[C_k]_{m,m} = e^{\frac{j2\pi}{\sqrt{L}}[U]_{k,m}}, k = 1,2; m = 1, \dots, M_t; C_k \sqrt{L} = I$$

and  $M_t \times B$  matrix  $Y (B \leq M_t)$ , the entries in the codebook are given as:  $W_l = C_1^{l_1} C_2^{l_2} Y$ , with  $l = [l_1 \ l_2]$ , and  $l_i$  are elements in the ring of integers mod  $\sqrt{L}$ . The elements,  $\dots$ , of the basis matrix  $Y$  is given by:

Where  $\mathcal{U}$  is a selection of  $M$  distinct indices from the set  $\mathcal{U} = \{0, 1, \dots, N-1\}$ . The elements of the matrix  $U'$  and the column subset selection  $\mathcal{U}'$  for  $Y$  will be further specified. The mapping of the codeword index  $i$  ( $i=1, 2, \dots, L$ ) and  $l$  ( $l=1, 2, \dots, L$ ) is list in Table aaa.

Table aaaa

$i$	1	2	3	4	5	6
$l$	TBD	TBD	TBD	TBD	TBD	TBD

----- *End text* -----