

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Transport connection establishment of MS by a RS implementing localized MS CID management	
Date Submitted	2007-08-05	
Source(s)	Hang Zhang, Peiying Zhu, Mo-Han Fong, Wen Tong, David Steer, Gamini Senarath, G.Q. Wang, Derek Yu, Israfil Bahceci, Robert Sun and Mark Naden Nortel 3500 Carling Avenue Ottawa, Ontario K2H 8E9	Voice: +613-763-1315 E-mail: wentong@nortel.com Voice: +613-765-8983 E-mail: pyzhu@nortel.com
Re:	IEEE P802.16j/D1: IEEE 802.16j working group letter ballot #28	
Abstract		
Purpose	To incorporate the proposed text into the P802.16j/D1 Baseline Document	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < http://standards.ieee.org/guides/bylaws/sect6-7.html#6 > and < http://standards.ieee.org/guides/opman/sect6.html#6.3 >. Further information is located at < http://standards.ieee.org/board/pat/pat-material.html > and < http://standards.ieee.org/board/pat >.	

Transport connection establishment of a MS by a RS implementing localized MS CID management

Hang Zhang, Peiying Zhu, Mo-Han Fong, Wen Tong, David Steer, Gamini Senarath, G.Q. Wang,
Derek Yu, Israfil Bahceci, Robert Sun and Mark Naden

Nortel

1. Introduction

Based on current baseline document, the connections of a MS can be managed either by MR-BS (end-to-end connection management) or by the access RS of the MS (localized connection management). The text regarding localized MS transport connection management currently is missing. In this contribution, the transport connection CID assignment of MS by a RS implementing localized MS CID management is addressed. In this contribution, it is assumed that the access RS is also performing distributed security function, i.e., the RS has security materials of MSs served.

2. Proposal

When a MS is attached to an access RS implementing localized MS CID management, the CID of a transport connection is assigned locally by the RS during MS service establishment.

The procedure of service flow set up initiated by MR-BS is shown in Figure 1.

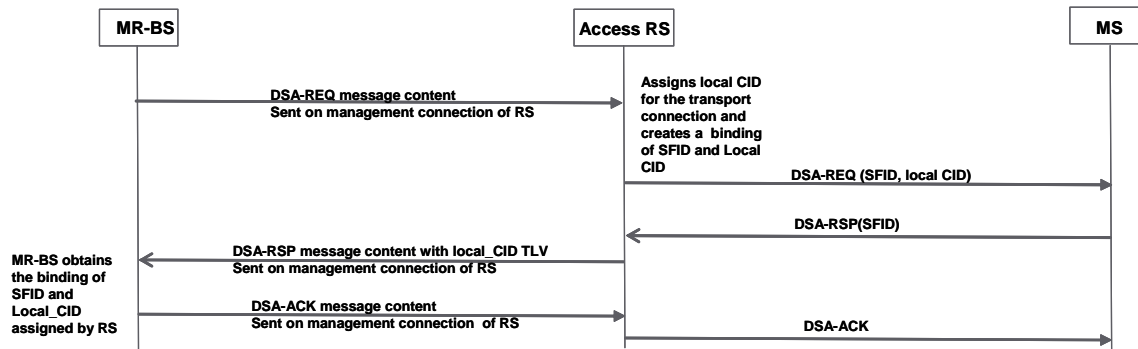


Figure1. Transport connection setup via a RS implanting both localized MS connection management and distributed security functions (MR-BS initiated)

For MR-BS initiated service flow setup to a MS, the MR-BS sends DSA-REQ message without the CID TLV over the management connection of the RS. After the RS receives this message, the RS shall assign a local CID (L_CID) to the transport connection to be established for this service flow and creates binding between this SFID and this L_CID. The RS shall then send the DSA-REQ message to corresponding MS with the assigned local CID. After RS receives the DSA-RSP message from the MS, the RS shall relay this message as well as the assigned local CID TLV to MR-BS over its management connection.

After this MR-BS receives this DSA-RSP message, the MR-BS creates a binding between SFID and local CID assigned by this RS.

For MS initiated service flow setup (refer to Figure 2), after a RS receives DSA-REQ from a MS, the RS shall assign a local CID to this potential UL service flow and relay the received DSA-REQ message as well as the locally assigned CID to the MR-BS. The binding between the UL service flow and the local CID is established by MR-BS. The MR-BS shall send DSA-RSP message to the RS. The RS then relays the DSA-RSP message to the MS including the local CID assigned by the RS. The RS crates a binding between the SFID and the local CID.

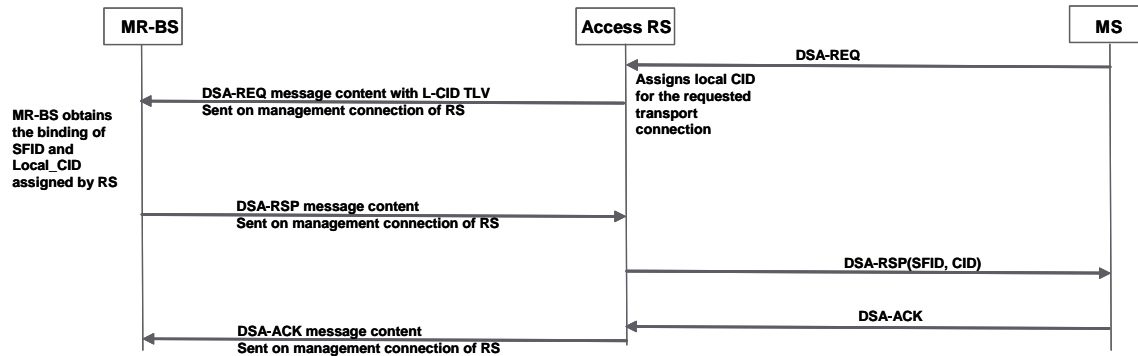


Figure 2. Transport connection setup via a RS implanting both localized MS connection management and distributed security functions (MS initiated service set up).

3. Proposed text change

[Add the section 6.3.14.9.6 as followings]

+++++ Start text +++++

6.3.14.9.6 Service flow management through a RS with localized MS CID management and distributed security

When a MS is attached to an access RS with localized MS CID management, the CID of a transport connection is assigned locally by the RS during MS service establishment.

For MR-BS initiated service flow setup to a MS, the MR-BS sends DSA-REQ message without the CID TLV over the management connection of the RS. After the RS receives this message, the RS shall assign a local CID (L CID) to the transport connection to be established for this service flow and creates binding between this SFID and this L CID. The RS shall then send the DSA-REQ message to corresponding MS with the assigned local CID. After RS receives the DSA-RSP message from the MS, the RS shall relay this message as well as the assigned local CID TLV (using the CID TLV) to MR-BS over its management connection.

After this MR-BS receives this DSA-RSP message, the MR-BS creates a binding between SFID and local CID assigned by this RS.

For MS initiated service flow setup, after a RS receives DSA-REQ from a MS, the RS shall assign a local CID to this potential UL service flow and relay the received DSA-REQ message as well as the locally assigned CID (use the CID TLV) to the MR-BS. The binding between the UL service flow and the local CID is established by MR-BS. The MR-BS shall send DSA-RSP message to the RS. The RS then relays the DSA-RSP message to the MS including the local CID assigned by the RS. The RS crates a binding between the SFID and the local CID.

+++++++ End text ++++++