

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >		
Title	Interference scenarios in 2.4GHz ISM / 5.8GHz UNII bands for not-located BS/SS		
Date Submitted	2004-05-17		
Source(s)	Marianna Goldhammer Alvarion 21, HaBarzel Street Tel Aviv, Israel	Voice: Fax: mailto: marianna.goldhammer@alvarion.com	+972 54 22 55 48 +972 3 6456241
Re:	IEEE 802.16 LE Ad-hoc		
Abstract			
Purpose	Continue the LE Ad-Hoc work		
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.		
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.		
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.		

Interference scenarios in 2.4GHz ISM and 5.8GHz UNII bands – not co-located BS/SS

Author: Marianna Goldhammer (Alvarion)

1. Introduction

The scope of this work is to define the scenarios in which interference between cells can cause disruption in service. The target bands are 2.4GHz, ISM rules and 5.8GHz, according to UNII rules. Will be taken into account un-coordinated deployment cases, to address access providers and private ad-hoc networks. The system parameters defined in the LE Ad-Hoc output document (IEEE 802.16-04_07) were used and also reproduced below.

2. System parameters

The following parameters are proposed, resulting as an average of product characteristics in 5.8GHz:

BST:

Tx power:

2.4GHz: 25dBm

5.8GHz: $P_{tb} = 20\text{dBm}$;

Antenna gain: omni: $AG_o = 10\text{dBi}$; directional: $AG_{ba} = 17\text{dBi}$;

Connector loss: $CL = 1\text{dB}$;

SS:

Tx power: $P_{ts} = 20\text{dBm}$;

Antenna gain: omni: $AG_{so} = 10\text{dBi}$; directional: $AG_{sa} = 17\text{dBi}$;

Connector loss: 1dB.

Antenna isolation for co-located outdoor antennae:

$AI = -75\text{dB}$ for directional – to- directional, 1m between sectors

$AI = 30\text{dB}$ for omni-to-directional or omni-to-omni.

Signal BW for evaluation: 10MHz.

Note: for simplification, it is proposed to omit 20MHz here

Fade Margin: 10dB

The Receive Sensitivity Level (RSL), Adjacent Channel Interference (ACI) resistance, Signal-to-Noise Ratio - SNR, at minimum rate, as defined in 802.16REVd/D3 (see Annex 1), are summarized below:

Table 1 – RSL, ACI, SNR

	RSL (dBm) / Modulation	ACI (dB) / Modulation	SNR (dB) / Modulation	Blocking Rx level (dBm)
SCa	-83.2 / QPSK	-9 / QPSK	9.8 / QPSK	-40 (BS) and -20 (SS)

OFDM	-82.6 / QPSK 1/2	-11 / 16QAM 3/4	9.4 / QPSK 1/2	-30
OFDMA	-82.6 / QPSK 1/2	-11 / 16QAM 3/4	9.4 / QPSK 1/2	-30

It is proposed to use the following values:

RSL: -83dBm

SNR: 9.8dB

Blocking Level: BL= -40dBm

ACI: -12dB.

3. Interference cases

3.1. Subscriber Station to Base Station

3.1.1. Interference level calculation

The assumed scenario is that a foreign SS, belonging to another system, will transmit during the time when the victim BS is in receive state. This situation is relevant also for synchronized MAC Frames or even for FDD deployment, in Licensed bands, no guard interval.

Will be calculated the minimum distance for 1dB threshold degradation, between a Base Station and a Subscriber station, belonging to another system. The figure 4 represents the considered scenario.

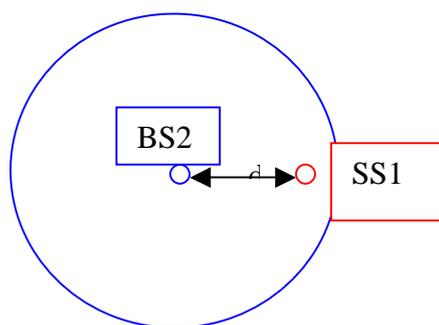


Figure 1 Foreign Subscriber to Base Station Interference

The interfering signal at BS2 is:

$$P_i = P_{ts1} + AG_{s1} - CL1 + AG_{b2} - CLs2 - Path_loss_i = 20 + AG_{s1} + AG_{b2} - 1 - Path_loss_I$$

$$P_i = AG_{s1} + AG_{b2} + 18 - Path_loss_i$$

When the foreign SS creates at BS1 location levels higher than RSL+ACI, the degraded RSL (D_RSL) is:

$$D_RSL = N + (P_i - ACI) + S/N = RSL + (P_i - ACI)$$

We can have 3 cases, depending the antenna type. We assume the worst case, LOS propagation and same line antenna mounting, looking one to the other.

In the next two tables, are presented the interference levels, adjacent channel and translated from adjacent channel to co-channel, for ACI=-12dB and RSL=-83dB. Different SS-BS distances were taken into account.

3.1.2. Service disruption due to interference

There are 2 possibilities of service disruption:

- Radio front end saturated (interference level higher than -40dBm -(SCa definition);
- Interference levels higher than allowed.

The minimum adjacent channel signal that will cause 1dB RSL degradation is:

$$Degradation_level = RSL - ACI = -83 + 12 = -71dBm$$

Any signal higher than this will decrease the cell size. The relation between interference level and the decreased cell size is shown in the following tables.

The color code is:

- radio blocking – violet
- too high interference level – red
- yellow – marginal situation.

Table 2 Interference levels created by one foreign SS, at Base Station location, 2.4GHz

Interference levels at BS, SS at x meters	BS and SS - omni			BS and SS - directional			BS directional, SS omni		
	Level	ACI correction	RSL Degr.	Level	ACI correction	RSL Degr.	Level	ACI correction	RSL Degr.
50	-36.0			-22.0			-29.0		
100	-42.0			-28.0			-35.0		
250	-50.0	-62.0	21.0	-36.0			-43.0	-55.0	28.0
500	-56.0	-68.0	15.0	-42.0	-54.0	29.0	-49.0	-61.0	22.0
1000	-62.0	-74.0	9.0	-48.0	-60.0	23.0	-55.0	-67.0	16.0
2000	-68.0	-80.0	3.0	-54.0	-66.0	17.0	-61.0	-73.0	10.0
4000	-74.0	-86.0		-60.0	-72.0	11.0	-67.0	-79.0	4.0
7500	-79.5	-91.5		-65.5	-77.5	5.5	-72.5	-84.5	
10000	-82.0	-94.0		-68.0	-80.0	3.0	-75.0	-87.0	

Table 3 Interference levels created by one foreign SS at Base Station location, 5.8GHz

Interference levels at BS, SS at x meters	BS and SS - omni			BS and SS - directional			BS directional, SS omni		
	Level	ACI correction	RSL Degr.	Level	ACI correction	RSL Degr.	Level	ACI correction	RSL Degr.
50	-43.6	-55.6	27.4	-32.6			-36.6		
100	-49.7	-61.7	21.3	-38.7			-42.7	-54.7	28.3
250	-57.6	-69.6	13.4	-46.6	-58.6	27.4	-50.6	-62.6	20.4
500	-63.6	-75.6	7.4	-52.6	-64.6	21.4	-56.6	-68.6	14.4
1000	-69.7	-81.7		-58.7	-70.7	15.3	-62.7	-74.7	8.3
2000	-75.7	-87.7		-64.7	-76.7	9.3	-68.7	-80.7	2.3
4000	-81.7	-93.7		-70.7	-82.7	3.3	-74.7	-86.7	
7500	-87.2	-99.2		-76.2	-88.2		-80.2	-92.2	
10000	-89.7	-101.7		-78.7	-90.7		-82.7	-94.7	

The tables before show very high interference level, such that out-door operation is impossible without sharing in time the frequency resource. Supplementary, the cell size will be reduced.

If the foreign SS will operate 2 channels aside, the radio blocking still remains. The translated interference level will be better by 20dB, relative to the first channel, but still the cell size, QoS and capacity are affected. Two spare channels will give a satisfactory response to this problem. Unfortunately, this possibility is not applicable in License Exempt bands.

3.2. Base Station to Subscriber Station

3.2.1. Interference level calculation

Same scenario (Figure 2) as before applies. As the SS and BS transmit powers were assumed equal, in 5.8GHz, the results in Table 4 are relevant also for this case. In 2.4GHz the Base Station will transmit at 5dB higher levels, due to regulatory allowance. The interference levels are presented in next table.

Table 5 Interference levels created by one foreign BS, at Subscriber Station location, 2.4GHz

Interference levels at BS, SS at x meters	BS and SS - omni			BS and SS - directional			BS directional, SS omni		
	Level	ACI correction	RSL Degr.	Level	ACI correction	RSL Degr.	Level	ACI correction	RSL Degr.
50	-31.0			-17.0			-17.0		
100	-37.0			-23.0			-23.0		
250	-45.0	-57.0	26.0	-31.0			-31.0		
500	-51.0	-63.0	20.0	-37.0			-37.0		

1000	-57.0	-69.0	14.0	-43.0	-55.0	28.0	-43.0	-55.0	28.0
2000	-63.0	-75.0	8.0	-49.0	-61.0	22.0	-49.0	-61.0	22.0
4000	-69.0	-81.0		-55.0	-67.0	16.0	-55.0	-67.0	16.0
7500	-74.5	-86.5		-60.5	-72.5	10.5	-60.5	-72.5	10.5
10000	-77.0	-89.0		-63.0	-75.0	8.0	-63.0	-75.0	8.0

The situation is worse, as compared with the previous scenarios, due to the higher transmitted power.

3.3. Subscriber Station to Subscriber Station

The same principles, as before, apply for interference calculation. The results are as shown in Table 2, for 2.4GHz and Table 3, for 5.8GHz.

4. Conclusion

The Base Station to Subscriber Station and Subscriber Station to Base Stations are very strong degradation factors.

A solution for spectrum sharing shall address as well these interference scenarios.