

Project	IEEE 802.16 Broadband Wireless Access Working Group	
Title	Functional Requirements for the 802.16.3 Interoperability Standard	
Date Submitted	2000-04-29	
Source	Brian Petry (editor) 3Com 12230 World Trade Dr. San Diego, CA 92128	Voice: (858) 674-8533 Fax: E-mail:brian_petry@3com.com
Re:	<p>This is a collaborative effort by the 802.16.3 Functional Requirements Task Group which started from a contribution by George Fishel and was further revised by the task group by a formal comment/resolution process. Please be sure you are reading the most recent published version of this document (802.16.3-00/02rx where x is the version number) which can be found at: http://ieee802.org/16/sub11/docs/802163-00_02.pdf</p> <p>This document is input to 802.16 session #7 (1-5 May, 2000). It contains edits that will be reviewed by the 802.16.3 task group at session #7.</p>	
Abstract	<p>This document provides functional requirements that are guidelines for developing an interoperable 802.16.3 air interface. The 802.16.3 committee desired to reach an understanding and consensus for functional requirements before proceeding with developing standards for 802.16.3 MAC and PHY protocols and thus formed a Functional Requirements Task Group to produce this document.</p> <p>Note that this document contains red-lined edits that have not been approved by the task group. This document has many cross-reference, section numbering and formatting errors. These errors will be fixed by the editor for the next version of this document.</p>	
Purpose	This document should be reviewed by the 802.16.3 task group, and once approved by the task group, forwarded to the 802.16 working group for approval. Prior to approval, this document may undergo more comment resolution.	
Notice	This document has been prepared to assist the IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor acknowledges and accepts that this contribution may be made public by 802.16.	
IEEE Patent Policy	<p>The contributor is familiar with the IEEE Patent Policy, which is set forth in the IEEE-SA Standards Board Bylaws <http://standards.ieee.org/guides/bylaws> and includes the statement:</p> <p>“IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard.”</p>	

Acknowledgements

George Fishel provided the first draft of this document, based on the 802.16.1 Functional Requirements, 802.16s-99/00r1.

Revision History

2000-03-02	802.16.3-00/02r0	George Fishel	First Draft; Based on 802.16s-99/00r1
2000-04-29	802.16.3-00/02r1	Brian Petry (editor)	With red-lined, unapproved changes specified by commentors
2000-05-05	802.16.3-00/02r2	Brian Petry (editor)	With changes approved by task group in 802.16 session #7

~~Proposed Functional Requirements Draft Document for Sub-10 GHz Study Group~~
Functional Requirements for the 802.16.3 Interoperability Standard

~~George Fisher~~Brian Petry (editor)

3Com!

~~Communications Consulting Services~~

Table of Contents

Acknowledgements..... ii

1 Introduction..... 1

 1.1 Scope..... 2

 1.2 Target Services [Freedman] 4

2 802.16.3 System Model..... 5

 2.1 System Reference Model 6

 2.2 Topology 8

3 Supported Services..... 8

 3.1 Services 9

4 802.16. Protocols..... 11

5 Performance and Capacity 14

 5.1 Scalability..... 14

 5.2 Delivered Bandwidth 14

 5.3 Flexible Asymmetry..... 14

 5.4 Radio Link Availability..... 15

 5.5 Error Performance..... 15

 5.6 Delay 15

 5.7 Capacity Issues 16

Wireless Media Characteristics [T; Goldhammer] 17

 Duplex model..... 17

 Channelization 17

 Cellular deployment 17

6 Class of Service and Quality of Service 17

 6.1 Types and Classes of Service 18

 6.2 Parameters 19

 6.3 Service QoS Mappings..... 19

- 7 Management..... 19
 - 7.1 Service Level Agreements 20
 - 7.2 Malfunctioning Subscriber Station or Base Station..... 20
 - 7.3 Accounting and Auditing 20

- 8 Security 20
 - 8.1 Authentication 21
 - 8.2 Authorization..... 21
 - 8.3 Privacy..... 21

- 9 802 Conformance 22

- Appendix 22

- Requirements Summary 22
 - Mandatory 22
 - Recommended (R)..... 4
 - Optional (O)..... 6

- Vocabulary of Terms 7
 - Acronyms and Abbreviations 11

- References 12

1 Introduction

This document provides functional requirements that are guidelines for developing an interoperable 802.16.3 air interface for the licensed microwave frequency bands between ~~4~~² and ~~10~~¹ GHz enabling Point to Multipoint (P-MP) Broadband Wireless Access (BWA) ~~for Line of Sight (LOS) and Near Line of Sight (NLOS) applications.~~ The BWA system is intended to provide packet, cell and other transport services.[Satopathy] Change "Broadband Wireless Access (BWA)" to "Wideband Wireless Access (WWA)" all over the document.[T; Freedman] The BWA system is intended to support a wide-range of transport capabilities (e.g., frame relay, ATM, IP, and Ethernet 802.11) that in turn can support a wide-range of services (e.g., telephone, data, and video) [T; Kostas] The BWA system shall support all services (real time and non real time) in a packet oriented manner.[Jansson] The BWA system is intended to provide packet data [E;Goldhammer] and other ~~non-fixed-rate~~ services [T; Kasslin: change previous phrase to: "The BWA system shall support all services (real time and non real time) in a packet oriented manner."] to individual residential, SME, SOHO and tele-commuter end-user locations.[T; Trinkwon] [E; Kostas: Delete previous sentence] ~~with statistical multiplexing over the air interface for spectrum efficiency. The core MAC protocol is based on DOCSIS1.1 and extended to serve the needs of the wireless PHY.~~ The 802.16.3 committee desired to reach an understanding and consensus for functional requirements before proceeding with developing standards for 802.16.3 MAC and PHY protocols and thus formed a System Requirements Task Group to produce this document.

~~While this standard is developed specifically for the licensed frequency bands between 1 and 10 GHz, this does not prohibit the use of the standard for unlicensed bands in cases where the standard interface is compatible with the requirements imposed by the particular national communications commissions.~~

~~Please note t~~That this document provides guidelines for the 802.16 working group. These functional requirements, with possible future amendments, are to be used to identify the constrains in the development of the 802.16.3 air interface standard. Such terms as SHALL, MUST and SHOULD as used herein are to indicate the relative importance of a requirement.~~Its purpose is to formulate and facilitate consensus on some general issues prior to plunging into MAC and PHY details.~~[T; Kostas] As such, the functional requirements are subject to change as the 802.16 working group debates the issues, makes revisions, and approves this document as a basis for starting the "Interoperability Standard" [20].

The Functional Requirements will not be published or sold by the IEEE. The requirements, with possible future amendments, are binding to the future development of 802.16.3 air interface protocols. This means that the forthcoming air interface standard MUST comply with the functional requirements.

Throughout this document, the words that are used to define the significance of particular requirements are capitalized. These words are:

"MUST" or "SHALL" These words or the adjective "REQUIRED" means that the item is an absolute requirement..

"MUST NOT" This phrase means that the item is an absolute prohibition.

1 "SHOULD" This word or the adjective "RECOMMENDED" means that there may exist valid
2 reasons in particular circumstances to ignore this item, but the full implications should be
3 understood and the case carefully weighed before choosing a different course.

4
5 "SHOULD NOT" This phrase means that there may exist valid reasons in particular
6 circumstances when the listed behavior is acceptable or even useful, but the full implications
7 should be understood and the case carefully weighed before implementing any behavior
8 described with this label.

9
10 (Where should this change go? I don't think this is the right place
11 Change sentence to read, "So, "Functional Requirements" describes the 802.16.3 MAC and PHY
12 Layer functions and system parameters that need be specified so that the BWA system can
13 support a wide-range of transport capabilities (e.g., Frame Relay, ATM, and Ethernet 802.11),
14 that in turn can support a wide-range of Services (e.g., telephone, data, and video) [T; Kostas]

15
16 "MAY" This word or the adjective "OPTIONAL" means that this item is truly optional. One
17 implementation may include the item because the target marketplace requires it or because it
18 enhances the product, for example; another implementation may omit the same item.

19 1.1 Scope


20 For the purposes of this document, a "system" constitutes an 802.16.3 MAC and PHY
21 implementation in which ~~at least one subscriber station~~ a large number of end user locations [T;
22 Trinkwon] communicates with a base station via a point-to-multipoint (P-MP) radio air interface,
23 the interfaces to external networks, and services transported by the MAC and PHY protocol
24 layers. So, "functional requirements" describes the properties of typical systems in terms of how
25 they affect requirements of interoperable 802.16.3 MAC and PHY protocols. The functional
26 requirements describe 802.16.3 systems and requirements in broad terms: *what* they are, but not
27 *how* they work. The *how* part is left to the forthcoming 802.16.3 interoperability standard [20],
28 which will describe in detail the interfaces and procedures of the MAC and PHY protocols.

29
30 ~~Since many BWA systems are conceivable, with many possible interconnections, inter-working~~
31 ~~functions [17] and parameters, †~~ This document does not specify them all, but focuses on the
32 services that an 802.16.3 system is required to transport. These *services* have a direct impact on
33 the requirements of the 802.16.3 MAC and PHY protocols. As far as possible, these SHOULD
34 be common across the 802.16 systems.[T; Wachira] When the 802.16 working group produces
35 an interoperable air interface standard that meets these functional requirements, resulting
36 802.16.3 systems WILL be able to provide [E; Wachira] provide the services required to neatly
37 interface into many conceivable BWA systems. See section Change sentence to read "The
38 802.16.3 air interface interoperability SHALL interwork with existing local, metropolitan, and
39 wide area network standards." [T; Kostas] As an example, Figure 1 shows how the 802.16.3
40 PHY and MAC layers relate to some other 802 standards. [E; Kostas]

41
42 Other goals of this document are to formulate reference models and terminology for both
43 network topology and protocol stacks that help the 802.16 working group to discuss and develop
44 the MAC and PHY protocols.

45
46 The 802.16.3 air interface interoperability standard SHALL be part of a family of standards for
47 local ~~and~~, metropolitan ~~area and wide area~~ networks. The 802.16.3 protocols relate to other 802
48 standards and to the OSI model as shown in Figure 1.

1

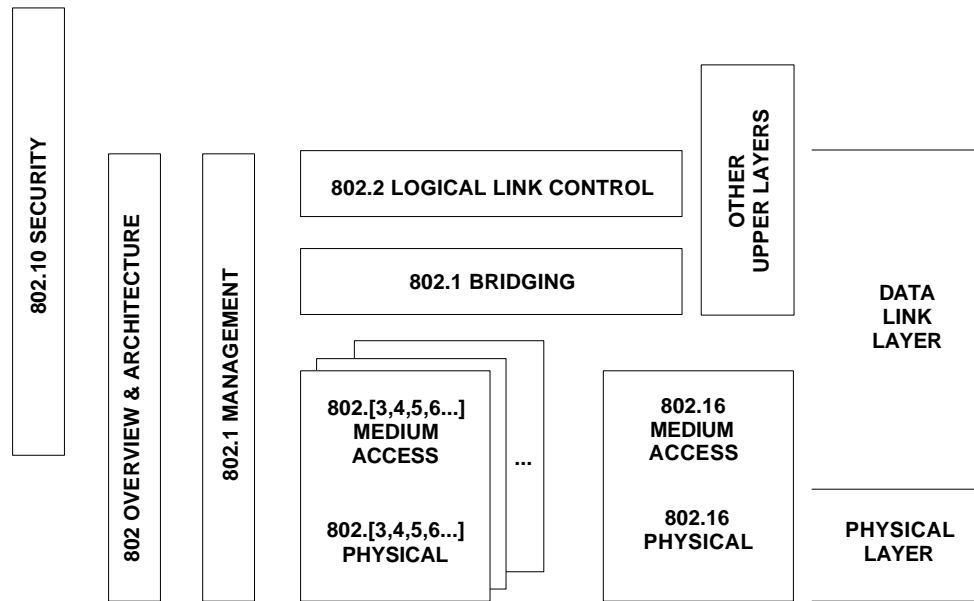

2

3 Figure 1: Relationship between 802.16.3 and other Protocol Standards (the numbers in
 4 the figure refer to IEEE standard numbers) Change title of Figure 1 to Figure 1:
 5 Relationship between 802.16.3 and other 802 Protocol Standards(... [E; Kostas]

6 Insert a Figure 0. That depicts the how the 802.16.3 MAC and PHY Layers relate to the
 7 supported upper layer protocols (e.g., Frame Relay, ATM, 802.11); i.e., 802.16.3 Protocol
 8 Reference Model [T; Kostas]

9

10 This family of standards deals with the Physical and Data Link layers as defined by the
 11 International Organization for Standardization (ISO) Open Systems Interconnection Basic
 12 Reference Model (ISO 7498: 1984). The access standards define several types of medium access
 13 technologies and associated physical media, each appropriate for particular applications or
 14 system objectives. Other types are under investigation.

15

16 The standards that define the technologies noted in the above diagram are as follows:

17

18 IEEE Std 802: Overview and Architecture. This standard provides an overview to the family of
 19 IEEE 802 Standards. This document forms part of the 802.1 scope of work.

20

21 ANSI/IEEE Std 802.1B [ISO/IEC 15802-2]: LAN/MAN Management. Defines an Open
 22 Systems Interconnection (OSI) management-compatible architecture, environment for
 23 performing remote management.

24

25 ANSI/IEEE Std 802.1D [ISO/IEC 10038]: MAC Bridging. Specifies an architecture and
 26 protocol for the interconnection of IEEE 802 LANs below the MAC service boundary.

27

28 ANSI/IEEE Std 802.1E [ISO/IEC 15802-4]: System Load Protocol. Specifies a set of services
 29 and protocols for those aspects of management concerned with the loading of systems on IEEE
 30 802 LANs.

31

32 ANSI/IEEE Std 802.2 [ISO/IEC 8802-2]: Logical Link Control

33

1 ANSI/IEEE Std 802.3 [ISO/IEC 8802-3]: CSMA/CD Access Method and Physical Layer
2 Specifications

3

4 ANSI/IEEE Std 802.4 [ISO/IEC 8802-4]: Token Bus Access Method and Physical Layer
5 Specifications

6

7 IEEE Std 802.10: Interoperable LAN/MAN Security, Secure Data Exchange (SDE)

8 **1.2 Target ~~Markets~~Services [Freedman]**

9 The target markets described in this section are not an exhaustive set, but serve as guidelines and
10 examples that suffice for meeting the broad applicability goals set forth by the air interface “Five
11 Criteria” [20a].

12

13 ~~Exchange this paragraph with the next paragraph [T; Freedman] [T; Jansson: delete following~~
14 ~~paragraph; bullets too?]~~A broadband wireless access (BWA) system based on 802.16.3 protocols
15 is expected to address markets similar to those of certain wired access technologies such
16 ~~as similar to wired broadband access technologies such as~~[E; Wachira]:

17

- 18 • Copper digital subscriber line (xDSL) technologies
- 19 • Digital cable TV hybrid fiber/coax (HFC) networks
- 20 • Integrated Services Digital Network (ISDN)
- 21 • The services that such legacy systems carry: data, voice and audio/video [8].
- 22 • Point-to-Point ATM access [T; Kostas]
- 23 • Native Ethernet [T; Kasslin]
- 24 • Fiber [T; Jansson]

25

26 The critical parameters for serving these markets using wireless access technology is the
27 combination of coverage / capacity factors that affects access cost per user, the deployability,
28 maintainability and product costs associated with the customer premise installation, and the
29 spectrum efficiency / reuse for economically serving the required number of customer locations
30 with a minimum number of base station locations and backhaul routes [T; Trinkwon]

31

32 The ~~initial~~ target markets to be addressed by the 802.16.3 protocols in BWA networks are single
33 family residential, SOHO, telecommuters [T; Goldhammer] [T; Trinkwon] and small businesses
34 and multi-tenant dwellings. ~~Future growth will include multi-tenant dwellings such as high rise~~
35 ~~buildings.~~

36

37 [Note from Trinkwon: Proposal : To invite contributions on definitions of these terms (single
38 family residential, SOHO, telecommuters, small businesses and multi-tenant dwellings) and
39 associated traffic model assumptions, demographic density / distribution criteria and typical
40 clutter / propagation implications.]

41

42 A key word in BWA is “access:”–access to some other network such as the Internet, a private
43 network, a telephony network, etc. An 802.16.3 access system generally provides access to an
44 external network, and by itself is not intended to form an end-to-end communication system.
45 802.16.3 systems- serve fixed position customer stations[E; Wachira]. In accordance with ITU-R
46 definitions, FWA (and hence BWA) provides access to one or more (public and private) core
47 networks, rather than forming an end-to-end communication system. 802.16.3 systems serve


1 fixed location customers, but who might be geographically or re-locatable or even nomadic (but
 2 not mobile). [T; Trinkwon (note: editor's not sure this is the right place)]

3
 4 ~~The word *subscriber* is associated with a single customer that is billed for a service. A Small~~
 5 ~~Business customer is a subscriber with multiple users behind the CPE. [14]. This requirement~~
 6 ~~may affect multiplexing in the MAC layer, security (see section), and accounting (see section).~~
 7 Editor's note: Need contribution on subscriber. Multi-subscriber capability from a single radio is
 8 a must for this air interface.

10 2 802.16.3 System Model

11 This section presents a high level description of a system model to be used as a framework for
 12 developing 802.16.3 ~~protocool~~ standards. The model describes some of the main features of an
 13 802.16.3 system, and the terminology to be used by the 802.16.3 ~~working~~ group in the
 14 creation of the standards.

15
 16 As mentioned in section, an 802.16.3 "system" constitutes: an 802.16.3 [E; Freedman] MAC and
 17 PHY implementation, in which ~~at least one subscriber station a large number of end user~~
 18 ~~locations~~ [T; Trinkwon] communicates with a base station via a radio air interface (an 802.16.3
 19 system), and services transported by the MAC and PHY protocols. Specific applications of the
 20 802.16.3 point-to-multipoint (P-MP) radios include 2.1 to [E; Freedman] 3.54.2 [T; Kasslin]
 21 GHz, but the standard ~~is~~ [E; Wachira] more generally applicable to the range from 1 GHz to 10
 22 GHz. ~~The Equipment based on the~~ [E; Wachira] standard is used to connect a base station to one
 23 or more subscriber stations [4][9]. Radio communications in the above range ~~require benefits~~
 24 ~~from~~ [T; Kasslin] near-non [T; Kasslin] line-of-sight (NLOS) [T; Wachira: use this phrase
 25 instead: "will be required to support both line-of-sight (LOS) and non line-of-sight (NLOS)"]
 26 ~~between a base station and subscriber station. -Non Line-of-Sight, Near Line-of-Sight and Line-~~
 27 ~~of-Sight~~ NLOS [T; Trinkwon] operation may include partial blockage by foliage which
 28 contributes to signal attenuation and multipath effects. Figure 2.1 depicts a typical 802.16.3
 29 systems [E; Wachira]. 802.16.3 systems SHALL be deployable in multiple-cell frequency reuse
 30 systems and single cell (super cell) frequency reuse systems. The range of 802.16.3 radios varies
 31 with transmit power, ~~NLOS blockage~~ channel characteristics [T; Abu-Dayya], availability
 32 requirement, regulatory [T; Trinkwon] and atmospheric conditions. Figure <as inserted below>
 33 shows an example deployment configuration. The base station can serve individual buildings,
 34 multiple subscribers in multiple buildings (using multiple radio links), or multiple subscribers in
 35 a single building by use of a single radio link and further in-building distribution systems. It
 36 shows the use of a repeater and route diversity in order to provide coverage in difficult areas.
 37 This does not imply the use of these features in all systems. However it does require the
 38 capability to implement them if required, and leave them out if not. [T; Kasslin]

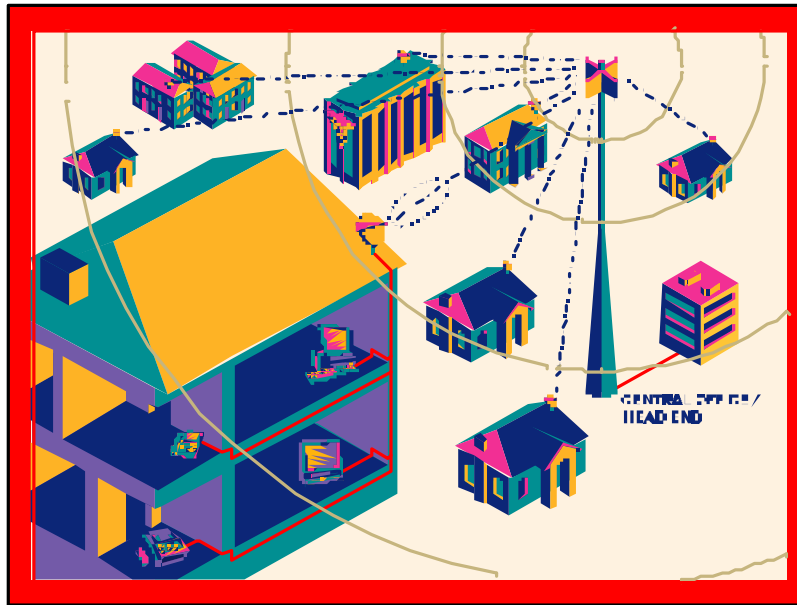

1

2 Figure 2-1: System Showing a Base Station Mounted on a Tower [T; Kasslin: Replace
 3 figure 2-1 with figure 4-3 from TR 101 177 V1.1.1 (1998-05) by
 4 ETSI/BRAN/HIPERACCESS]

5

6 Note, in concern for simple terminology, an 802.16.3 *system* consists of one base station radio
 7 and one or more ~~subscribers~~subscriber stations [E; Wachira]. Thus, an 802.16.3 system also
 8 defines 802.16.3 base station and subscriber station radios that communicate using the 802.16.3
 9 MAC and PHY protocols. [T; Kasslin: delete from here through “is not possible”] The base
 10 station radio SHALL be P-MP, radiating its *downstream* signal with a shaped sector or adaptive
 11 array (spacial reuse) antenna achieving broad azimuthal beam width to “cover” a prospective
 12 number of subscribers. . Omnidirectional antenna are often used as an initial (low capacity, low
 13 cost) base-station in competitive overlay or rural deployments, but might be enhanced later to
 14 sectored configurations to increase capacity or range as customer penetration / loadingsor
 15 distances dictate. It might also be necessary to reconfigure coverage from a single "Super-cell" to
 16 a multi-cell coverage plan at some point in the life of a base station, while minimising the
 17 number and cost of customer units wjich need re-pointing or re-installation.~~An isolated~~
 18 ~~omnidirectional antenna should be treated as the degenerative version of the sectored~~
 19 ~~operation~~[T; Trinkwon]. Each subscriber station employs a highly[T; Trinkwon] directional
 20 radio pointed at the base station. Note that with this arrangement, direct radio communications
 21 between subscriber stations is not ~~possible~~supported [E; Wachira]. Furthermore, the 802.16.3
 22 system does not define radio communications between base stations. Since the base station
 23 radios ~~are~~might be [T; Trinkwon] “sector oriented,” [T; Kasslin: Delete previous part of
 24 sentence] multiple base station radios will likely, in practice, be co-located (subject to frequency
 25 re-use requirements), and might [T; Trinkwon] even share physical hardware.

26

27 The frequency bands used by 802.16.3 systems vary among governed geographies [19].

28 **2.1 System Reference Model**

29 Figure 2-2 shows the 802.16.3 system reference points, depicting the relevant elements between
 30 a subscriber network and the “core” network (the network to which 802.16.3 is providing

access). A greater system encompassing user terminals, base station interconnection networks, network management facilities, etc. [1] may be envisaged, but the 802.16.3 protocols focus on the Air Interface shown in the simplified model of Figure 2.2.~~the 802.16.3 protocols focus on the simplified model shown in the figure~~[E; Kostas]. Also shown in Figure 2.2 are typical configurations of the Base Station (BS) and the Subscriber Station (SS), that include the functions of "Indoor Units"(IU) and "Outdoor Units" (OU). However, the physical separation and protocols between OU and IU are beyond the scope of this document.~~Also shown are the physical characteristics of the base station and subscriber station: the concepts of "indoor" and "outdoor" units. However, The description of separation and protocols of base station and subscriber station into indoor and outdoor units is beyond the scope of this document.~~[E; Kostas] [T; Wachira: Delete only previous two sentences] –An additional function to this System Reference Model that should be considered is Security. The BS Network Interface (BNI) and the SS Network Interface (SNI) are also shown.~~One addition to this model to be considered are security systems (see section XXX). Two key interfaces "to the outside world" are shown in the figure: the Base Station Network Interface (BNI) and the Subscriber Station Network Interface (SNI).~~[E; Kostas]

A single SNI may support multiple residential (customer premises) [E; Wachira] networks: ~~voice, data and video, etepacket, voice and in some cases, video~~ [E; Goldhammer]. A ~~base~~Base [E; Freedman] station interfaces may support one or more core networks through one or more BNIs. For the purposes of 802.16.3, the SNI and BNI are abstract concepts. The details of these interfaces, ~~which are sometimes called inter-working functions (IWFs),~~[E; Kostas] and interworking functions (IWFs) [T; Satapathy] are beyond the scope of this document and are not specified by the forthcoming interoperability standard [20] [17]. Since many subscriber and core network technologies are possible, many different IWFs are conceivable. The simplified reference model, serves to discuss the impact of core network technologies and services (see section XXX) on the requirements of 802.16.3 protocols by drawing focus to the air interface and the immediate requirements imposed by the surrounding networks. The standard (e.g., MAC/PHY protocols) SHALL describe common access protocol(s) and comm-[E; Freedman] on modulation technique(s).

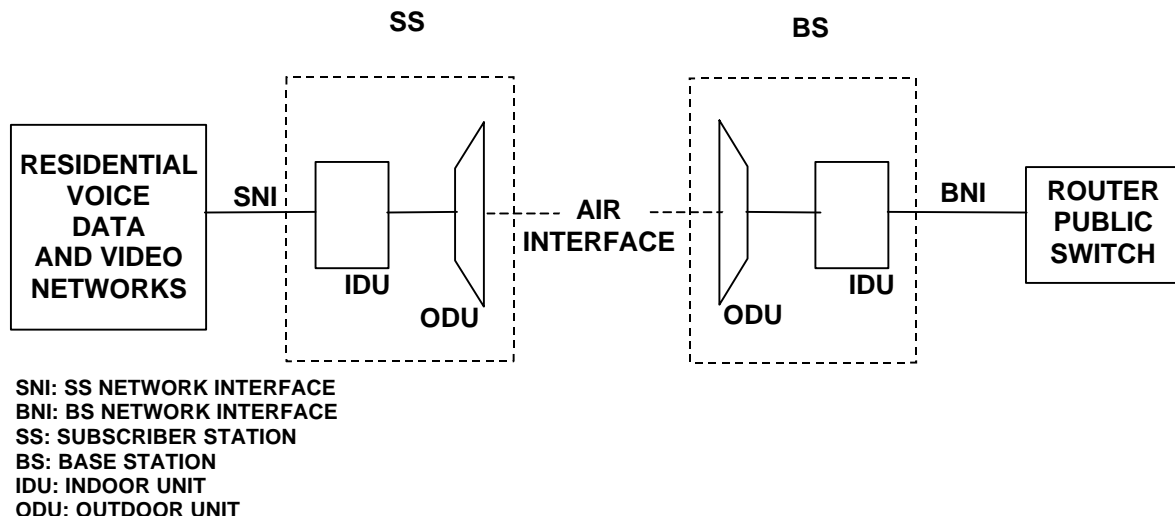


Figure 2-2: System Reference Points [E; Goldhammer: change "voice data and video" to "data voice video"] [T; Freedman: Add optional Central Control Station and more base station to diagram] [T; Trinkwon: Amend Figure 2-2 to show :

1 a) Local Power within the SS box, supplying the IDU and ODU.

2 b) Multiple ODU's per IDU at the BS

3 c) Remote IDU's from the BS IDU. These Remote units / antenna would be located
 4 away from the BS site to improve coverage / economics in range or capacity limited
 5 deployments.

6
 7 d) The BS IDU might not be located at the BS - it might be at another location (which
 8 might be the same as the public switch / router)

9
 10 e) The switch / router might not be public - it might be a private / corporate edge device
 11 which might, or might not have public network gateways / connections behind it.

12 [T; Kasslin: In Figure 2-2 delete the drawings inside the SS and BS boxes
 13 and delete the terms IDU and ODU.]

14
 15 [T; Wachira: Remove references to ODU and IDU]

16 **2.2 Topology**

17 Since all data traffic in a single cell of an 802.16.3 network MUST go through the base station,
 18 that station SHALL serve as a radio resource supervisor [10]. The Subscriber Stations may
 19 identify the bandwidth needed to achieve the required QoS (see section) , but the BS has the
 20 "smarts" to allocate bandwidth.~~The subscriber stations may request bandwidth to achieve QoS~~
 21 ~~objectives (see section), but it may be convenient for the base station to implement the "smarts"~~
 22 ~~of bandwidth allocation. [E; Kostas]~~

23
 24 [E; Kostas: Replace the following paragraph with this: In the downstream direction, within a
 25 channel, the network topology is similar to a contentionless broadcast bus, since the
 26 transmissions are transmitted by the base station, and more than one Subscriber Station can share
 27 a downstream channel. In the upstream direction the topology is similar to a contention-oriented
 28 bus, and thus 802.16.3 protocols MUST provide the means to multiplex traffic from multiple SS,
 29 resolve contention, and allocate bandwidth in the upstream direction.] [T; Kasslin: Delete from
 30 here up to "802.16.3 protocols"] In the downstream direction, ~~within a channel,~~ [T; Trinkwon]
 31 the network topology is similar to a contention-less broadcast bus, since all transmissions are
 32 transmitted by the base station, ~~and more than one subscriber station could share a downstream~~
 33 ~~channel~~ [T; Trinkwon]. [T; Jansson: Delete remainder of paragraph] In the upstream direction, ~~if~~
 34 ~~subscriber stations share a channel,~~ [T; Trinkwon] the topology is similar to a contention-oriented
 35 bus, 802.16.3 protocols MUST provide the means to multiplex traffic from multiple subscriber
 36 stations in the downstream direction, and provide for a means to resolve contention and allocate
 37 bandwidth capacity [T; Trinkwon] in the upstream direction.

38 **3 Supported Services**

39 This section describes some services that an 802.16.3 system SHOULD support. In what follows
 40 both the target markets and their associated bearer services are described.~~This section describes~~
 41 ~~the services that an 802.16.3 system at least SHOULD support (some services MUST be~~
 42 ~~supported). Both the target markets and the associated bearer services are described. It may be~~
 43 ~~difficult to comprehend services the system supports without first understanding the system~~

~~model. Please refer to section if necessary. [E; Kostas] [E; Wachira: Delete the word “bearer” from previous sentence.]~~

~~[T; Wachira: Use this instead: An 802.16.3 system SHALL support fixed wireless access to IP networks at bit rates of up to 10 Mbit/s. Voice services will be carried as "voice over IP."]~~

4.13.1 Services

~~This Section describes typical services supported by an 802.16.3 system. In this document services refer to the services provided by the MAC layer to the layer above it. The term services is also used in this document as an adjective to qualify the type of networks that interface with 802.16.3-based BWA networks(12)(54). This section describes typical services, transported by an 802.16.3 system. In this document, services refer to the services provided by the protocols that can appear in the layer sitting directly over the MAC layer. The meaning of services in this document also includes the types of networks that are able to interface with 802.16.3-based BWA networks. [E; Kostas] [12] [54].~~

~~The MAC and PHY protocols will not have explicit support for each and every service, due to the fact that generic data streams SHALL be used for transport. The MAC and PHY protocols SHALL provide for QoS service specific support. Service specific QoS meaning is very low BER for data services, delay for real time services, etc. [T; Goldhammer] The MAC and PHY protocols may not have explicit support for each and every service, since they SHOULD be handled as data streams in a generic fashion. But it is important to consider all the services for any particular requirements they may have and extract the “common denominators” that result as generic parameters of MAC and PHY protocols. [E; Kostas]~~

4.1.13.1.1 Voice Services

~~[E; Kasslin: change “telephony” to “voice services” throughout this section] 802.16.3 systems SHALL support “~~telephony~~voice services to subscribers in a way that eases the migration of legacy ~~telephony~~voice service equipment and public switched telephone network (PSTN) access technologies to 802.16.3 systems. [T; Satapathy: Change following sentence to: “The access transport will be packet based or cell based.”] The access transport will be mainly [T; Freedman] packet based (as opposed to circuit switched) and voice services ~~will~~MAY [T; Freedman] be recovered from the packets. [E; Kostas: delete the rest of this section] The consumer service level will be in the following form:~~

~~Narrow band/Voice Frequency Telephony – POTS [T; Kasslin] (supporting FAX and analog modem services)(supporting FAX services) [T; Trinkwon]~~

802.16.3 systems and protocols MUST support the QoS requirements of these services, as defined in Section.

3.1.1.1 Telephony-Voice Service Properties

~~[T; Kasslin: delete this section] The relevant properties of ~~telephony~~voice services are [12] [54]:~~

- Bandwidth – in general, the codings used in these services require bandwidths in the range of 64 Kbps or less per call. ~~[T; Satapathy: delete following sentence] Voice connectivity ~~will~~ MAY [T; Freedman] be provided via a VoIP protocol and may involve low rate vocoding. There are subjective quality metrics for the clarity of the encoded speech signals, that can~~

1 vary based on the quality of the services sold to the end user (e.g., residential vs. business).
 2 The required bandwidth is minimized with VoIP, the associated codecs providing a very
 3 good compression: 8kb/s for G.729, 6.3kb/s for G.723. The compression result is the increase
 4 of the delay. [T; Goldhammer]

- 5
- 6 • ~~Low delay~~ Delay [E; Goldhammer] – as apparent to the end users, the amount of delay
 7 between a user speaking and another user hearing the speech ~~MUST SHOULD~~ [T;
 8 Goldhammer] be kept below a certain level to support two-way conversation. The QoS
 9 requiremets should take into account the characteristics of the VoIP technology: codec end-
 10 to-end delay of 50ms for 10ms frame (G.729), 120ms for 30ms frame (G.723), the possibility
 11 to transmit concatenated voice packets, the mandatory use of echo cancellers.[T;
 12 Goldhammer] Again, the specific amount of delay can vary based on the quality of the
 13 service sold to the end user. Change this bullet to read: "Delay - as apparent to the end user,
 14 the amount of delay and delay variation MUST be kept within acceptable limits. Again the
 15 specific amount of delay and delay variation acceptable is based on the QoS sold to the end
 16 user." [T; Kostas]
 - 17
 - 18 • BER level The MAC and PHY protocols SHOULD provide for a reasonable BER Level for
 19 voice services. BER of 10-4 is sufficient for voice services and 10-5 for FAX. [T;
 20 Goldhammer]

21

22 BWA protocols MUST support efficient transport of encoded voice data in terms of bandwidth,
 23 reliability and delay.

24 **3.1.1 Internet Protocol Service**

25 The 802.16.3 system MUST directly transport variable length IP datagrams efficiently. Both IP
 26 version 4 and 6 MUST be supported. For efficient transport of IPv6, TCP/IP header
 27 compression over the air interface SHOULD be supported.

28

29 The 802.16.3 IP service MUST provide support for real-time and non-real-time services. It
 30 SHOULD be possible to support the emerging IP Quality of Service (QoS) efforts: Differentiated
 31 Services [43, 44] and Integrated Services [42].

33 **1.1.1.1 Internet protocol properties**

- 34 • Packet length - the IP datagrams are characterized by variable length. The MAC protocols
 35 MUST support efficiently variable length packets.
- 36 • Bit Error Rate - the TCP/IP protocol, as known from literature, drops its performance by 90%
 37 when the packet error rate reaches 10%. The MAC and PHY protocols MUST provide means
 38 for realible data transport, the BER target for cellular deployment SHELL be 10-9,
 39 equivalent to the performance of wired networks

41 **3.1.1.1.1 ATM Protocol Services**

1 The 802.16.3 system MUST transport constant bit rate(CBR), non-real-time variable-bit-
2 rate(non-rt VBR), real-time variable-bit-rate(rt VBR) and ABR ATM services. [T; Kostas]

4 1.4.23.1.2 Bridged LAN Service

5 The 802.16.3 protocols MAY support bridged LAN services, whether directly or indirectly,
6 including always on, ad hoc and on-demand communication in either or both directions [T;
7 Trinkwon].

8 1.4.33.1.3 Other Services

9 Other services that for instance require QoS-based delivery of the MAC services may be added.
10 ~~These services SHALL NOT place any special requirements on 802.16.3 systems (MAC and~~
11 ~~PHY protocols) not already covered in the above sections. [T; Kostas]~~
12

13 4 802.16. Protocols

14 ~~Protocols are the heart of the 802.16.3 standard that, when described well, result in~~
15 ~~interoperability of multiple vendors' equipment. Protocol interoperability occurs at each level in~~
16 ~~the protocol "stack" [16]. IEEE 802 protocols reside at layer 1 and 2 and consist primarily of~~
17 ~~Logical Link Control (802.2) [67] and the various MAC and PHY layers for each LAN or MAN~~
18 ~~standard. The IEEE Std 802-1990 *Overview and Architecture* [21] describes these layers as~~
19 ~~follows (excerpt from 802-1990:~~

20
21 ~~"The LLC Sublayer (sublayer of layer 2) describes three types of operation for data~~
22 ~~communication between service access points: unacknowledged connectionless (type 1),~~
23 ~~connection-oriented (type 2), and acknowledged connectionless (type 3).~~

24 ~~With type 1 operation, information frames are exchanged between LLC entities without the need~~
25 ~~for the prior establishment of a logical link between peers. These LLC frames are not~~
26 ~~acknowledged, nor are there any flow control or error recovery procedures.~~

27 ~~With type 2 operation, a logical link is established between pairs of LLC entities prior to any~~
28 ~~exchange of information frames. In the data transfer phase of operation, information frames are~~
29 ~~transmitted and delivered in sequence. Error recovery and flow control are provided.~~


30 ~~With type 3 operation, information frames are exchanged between LLC entities without the need~~
31 ~~[T; Kostas] for the prior establishment of a logical link between peers. However, the frames are~~
32 ~~acknowledged to allow error recovery and proper ordering. Further, type 3 operation allows one~~
33 ~~station to poll another for data."~~

34
35 "The MAC Sublayer performs access control functions for the shared medium in support of the
36 LLC Sublayer. For different applications, different MAC options may be required. The MAC
37 Sublayer performs the addressing and recognition of frames in support of LLC. MAC also
38 performs other functions, such as frame check sequence generation and checking, and LLC
39 protocol data unit (PDU) delimiting."
40

1 “The Physical Layer provides the capability of transmitting and receiving bits between Physical
2 Layer Entities. A pair of Physical Layer Entities identifies the peer-to-peer unit exchange of bits
3 between to MAC users. The Physical Layer provides the capability of transmitting and receiving
4 modulated signals assigned to specific frequency channels, in the case of broadband, or to a
5 single-channel band, in the case of baseband.”

6

7 The 802.16.3 protocol stack reference diagram is shown in figure 4-1. In addition to the LLC,
8 MAC and PHY layers suggested by the generic 802 architectures [21] [22] [23], 802.16.3
9 protocols transport other categories of “upper protocols” that correspond to the requirements of
10 the services described in section.

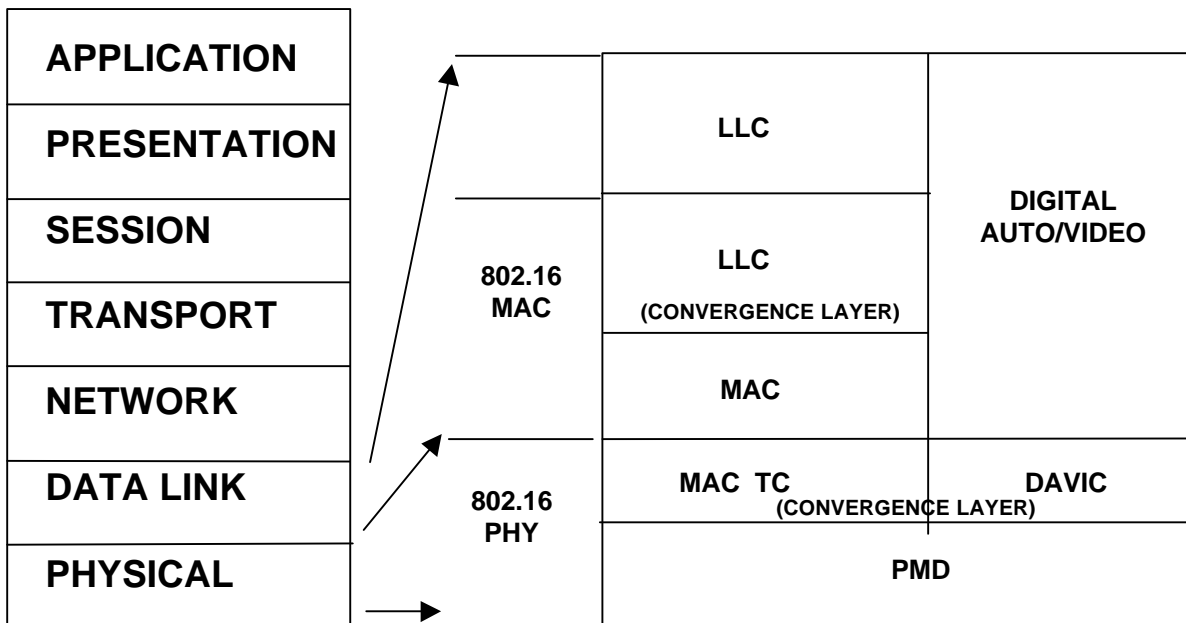1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

21 Figure 4-1: Protocol Stack Reference Model [T; Goldhammer: Delete the right hand
22 column (the DAVIC-based video stack)] [T; Freedman: Change DAVIC to "DAVIC or
23 other"] [E; Trinkwon: Change "auto" to "audio"; change DAVIC to "DAV TC"]

24 This protocol stack reference model is intended to help develop terminology, and possibly
25 protocol architecture. Each of the "special" protocols above the MAC and PHY are given
26 "convergence sub-layers.". The convergence sub-layers [2] [17] may be necessary to:

27

- 28 • Encapsulate PDU framing of upper layers into the native 802.16.3 MAC/PHY PDUs. [17]
- 29 • Map an upper layer's addresses into 802.16.3 addresses
- 30 • Translate upper layer CoS/QoS parameters into native 802.16.3 MAC constructs
- 31 • Adapt the asynchronous, synchronous or isochronous data pattern of the upper layer into the
32 equivalent MAC service
- 33 • Reduce the need for complex inter-working functions (IWFs) [17]

34

35 The IEEE 802.16.3 protocol stack SHALL be the same for all the supported services. [T;
36 Goldhammer] The central purpose of the MAC protocol layer in 802.16.3 is sharing of radio
37 channel resources. The MAC protocol defines how and when a base station or subscriber station
38 may initiate transmission on the channel. Since key layers above the MAC require service
39 guarantees, the MAC protocol MUST define interfaces and procedures to provide guaranteed
40 service to the upper layers. Since customer units will contend for capacity to/from one or more
41 base stations, in the downstream direction, since only one base station is present, and controls its
42 own transmission, the MAC protocol is simple. But in the upstream direction, if one radio
43 channel is allocated to more than one subscriber station, [T; Trinkwon] the MAC protocol MUST
44 efficiently resolve contention and bandwidth allocation. Note that the function of the MAC layer
45 can include error correction by retransmission, or Automatic Repeat Request (ARQ). Note that the
46 function of the MAC layer is not to provide error correction by retransmission, or automatic
47 repeat request (ARQ). [T; Kostas] In the 802 model, those functions if necessary, are provided
48 by the LLC layer

1 [T; Kostas]

2 The PHY layer is similarly subdivided between a convergence layer and a physical medium-
3 dependent (PMD) layer. The PMD is the “main” part of the PHY. Like the MAC convergence
4 layers, the PHY convergence layers adapt/map the “special” needs of the MAC ~~and DAV~~[T;
5 Kasslin] services to generic PMD services. Further details, and finalization of the protocol
6 reference model, SHALL be worked out by the 802.16.3 MAC and PHY task groups while
7 developing the air interface interoperability standard.

8 **5 Performance and Capacity**

9 This section addresses some issues regarding 802.16.3 system performance and capacity.

10 ~~Specifying protocols that can maintain a specified/mandatory performance levels in the face of~~
11 ~~rapidly changing channel characteristics(e.g., due to multipath) is a problem that the 802.16.3~~
12 ~~work group has to consider.~~~~Specifying protocols such that an 802.16.3 system can maintain a~~
13 ~~specified/mandated performance level in the face of rapidly changing channel characteristics~~
14 ~~(e.g., due to multipath) will be a difficult problem for the 802.16.3 working group.~~[E; Kostas]
15 [T; Abu-Dayya: Replace “difficult problem with “will be a requirement for”] This section
16 specifies the target performance levels. ~~The 802.16.3 system capacity at the target performance~~
17 ~~levels for all subscribers, given geographically local LOS obstruction and atmospheric conditions~~
18 ~~will also be difficult.~~[T; Abu-Dayya] [T; Jansson: delete just “local LOS obstruction” from
19 previous sentence] This section also outlines some of the issues for 802.16.3 capacity planning.
20

21 Note that ITU-R (WP 9A) has presented several questions regarding the need for performance
22 objectives for fixed wireless access radio systems, in particular, the activities being carried out
23 within the Joint Rapporteur Group (JRG) 8A/9B (with references etc) [T; Trinkwon]. [16]

24 **4.15.1 Scalability**

25 ~~The 802.16.3 protocols SHOULD allow for increases in capacity and performance.~~~~The 802.16.3~~
26 ~~protocols SHOULD allow for different “scales” of capacity and performance for 802.16.3 system~~
27 ~~instances.~~[E; Kostas]

28 **4.25.2 Delivered Bandwidth**

29 802.16.3 protocols SHALL be optimized to provide the ~~peak~~[T; Wachira] capacity up to 5Mb/s
30 in either or both directions~~from 2 to 10Mbps~~[T; Trinkwon] to a residential or SME customer
31 location~~subscriber station~~[T; Trinkwon] within the specified distance from the base station. The
32 802.16.3 MAC protocol SHOULD allow the upper range of delivered ~~bandwidth~~capacity [E;
33 Goldhammer] to scale beyond 10 Mbps.

34 **4.35.3 Flexible Asymmetry**

35 802.16.3 protocols SHOULD allow for flexibility between delivered upstream and downstream
36 bandwidth and CoS/QoS. Some target markets utilize naturally asymmetrical bandwidth, such as
37 for generic Internet access where most of the bandwidth is consumed in the downstream
38 direction. Some markets utilize asymmetrical bandwidth, using more in the upstream direction,
39 such as a video multicast from a corporate or distance-learning source. Other markets and
40 applications require symmetrical bandwidth, such as telephony and video conferencing [17].
41

42 A high degree of flexibility may be achieved by utilizing the MAC protocol to arbitrate channel
43 bandwidth in either direction, upstream or downstream.

1-45.4 Radio Link Availability

An 802.16.3 system SHOULD be available to transport all services at better than their required maximum error rates (see section) from about 99.9 to 99.9495[E; Kasslin] [T; Wachira: 99.99%] % of the time [2, 11] , assuming that the system and radios receive adequate mains power 100% of the time and not counting equipment availability. ~~Note that 99.999% availability amounts to approximately 5 minutes of outage a year.~~ [T; Kasslin] The 802.16.3 specifications SHALL NOT preclude the ability of the radio link to be engineered for different link availabilities, based on the preference of the system operator.

A period of unavailable time begins at the onset of ten consecutive SES events based on the following definitions (cite G.826).

- Severely Errored Second (SES) is defined as a one-second period which contains 30% errored blocks.
- Errored Block (EB): A block is defined as a set of consecutive bits associated with the path. Consecutive bits may not be contiguous in time. A block is typified as data block containing an error detection code for service performance monitoring. An errored block is a block in which one or more bits are in error.

It is expected that the highest contributor to 802.16.3 system outage will be excessive attenuation and multipath due to varying path impediment such as reflections and [T; Trinkwon] foliage. 802.16.3 MAC and PHY protocols MUST accommodate these conditions, perhaps consuming more radio bandwidth and/or requiring smaller radio propagation distance (radius) to meet the availability requirements. Since statistical atmospheric and path conditions vary widely in geography, the 802.16.3 protocols MUST be flexible in consumed radio bandwidth (spectral efficiency), cell radius, and transmit power. Bandwidth and cell radius are critical components of system/cell capacity planning (also see section). In a multicell environment intercell interference can not be neglected as an outage increasing factor. [T; Kasslin]

802.16.3 MAC and PHY protocols SHOULD specify functions and procedures to adjust transmitter power, modulation, or other parameters to accommodate rapid changes in channel characteristics.

5.5 Error Performance

The error rate, after application of the appropriate error correction mechanism (e.g., FEC), delivered by the PHY layer to the MAC layer SHALL meet IEEE 802 functional requirements: The bit error ratio (BER) is 10E-9. [BER should be changed from 10e-9 to 10e-6 or 10e-7 in accordance with ITU FWA recs (see JRG8a/9B inputs)] [T; Trinkwon] Note that this BER of the recovered payload applies to a BWA system which is only one component of a network's end-to-end BER. Note that the size of the data block is TBD.

5.6 Delay

Variation of delay, or jitter, is important to consider. For example, a high variation of delay can severely impact telephony services. However, generic Internet access can tolerate a high degree of delay variation.

1 The end-to-end delay is a subjective metric and depends on an entire application-specific
 2 network encompassing all 7 layers of the OSI model. ~~In a telephony network, for example, the~~
 3 ~~maximum acceptable end-to-end delay for the longest path is RECOMMENDED to be less than~~
 4 ~~300ms [15][17][75].~~ [T; Jansson]

5
 6 [T; Trinkwon: Change jitter spec to 20ms in following paragraph]

7 ~~The budget for 802.16.3 system transit delay and access delay MUST be derived. [15][17]. The~~
 8 ~~MAC layer may have different requirements for each direction, upstream and downstream. In~~
 9 ~~the upstream direction, time MUST be budgeted for requesting bandwidth and contending~~
 10 ~~among nodes. The budget for 802.16.3 transit delay is suggested to be less than 19.5 ms [15] for~~
 11 ~~“stringent QoS” services.~~

12
 13 ~~ITU I.356 [73] recommends end-to-end variation (jitter) for “stringent QoS class” to be less than~~
 14 ~~3 ms. Multimedia videoconferencing requires delay variation to be less than 200 ms end-to-end~~
 15 ~~to allow for reasonable synchronization of audio and video streams [17]. It is suggested that the~~
 16 ~~budget for 802.16.3 systems be 1.5ms [15] for “stringent QoS” services.~~ [T; Goldhammer]

17
 18 Please refer to section, descriptions of QoS parameters.

19 **5.7 Capacity Issues**

20 802.16.3 system capacity requirement is defined as the product of the number of subscribers,
 21 their peak bandwidth requirements and load factor based on quality of service guarantees. The
 22 delivered capacity can vary depending on attenuation due to atmospheric conditions, LOS
 23 blockage, transmit power, etc. In a given 802.16.3 system instance, capacity MUST be carefully
 24 planned to ensure that subscribers’ quality of service guarantees and minimum error rates are
 25 met. Given the atmospheric conditions statistics in a geographic area, and the development of a
 26 ~~channel~~ [T; Trinkwon] link budget [11], the following parameters of an 802.16.3 system
 27 SHOULD be addressed by the MAC and PHY protocols [11]:

- 28
- 29 • ~~Radio range (shaped sector radius)~~
- 30 • ~~Width of the sector~~ [T; Kasslin]
- 31 • Upstream/downstream channels’ data rates
- 32 • Allocation of prospective subscriber data rate to channels. Note: the MAC and PHY
- 33 standards MAY allow subscribers to hop between channels
- 34 • Types of modulation
- 35 • [T; Trinkwon: Replace above bullets with:
- 36 • Radio Range, width of sector(s) and/or adaptive array parameters
- 37 • Upstream / downstream link and user rates / asymmetry/ dynamics
- 38 • Types of Duplex (FDD, TDD, Paired TDD)
- 39 • Types of Modulation / Multiple Access (DS,SS etc, TDMA, CDMA, FDMA, SDMA or
- 40 combinations)

41
 42 The MAC and PHY protocols MUST accommodate channel capacity issues and changes in
 43 channel capacity to meet contracted service levels with customers. For example, flexible
 44 modulation types, power level adjustment, and bandwidth reservation schemes MAY be
 45 employed. Also, as subscribers are added to 802.16.3 systems, the protocols MUST
 46 accommodate them in an automated fashion.

1 The time-variant impairments (multi-path interference) is expected to be the most significant
2 contributor to channel impairments and complexity in cell capacity planning [7] [37] [38] [39]
3 [40] [11] [50] [51] [52] [53]. Common metrics, such as dispersive fade margin (DFM) [7] for
4 frequency-selective fading environments, may be employed to compare the performance of
5 802.16.3 equipment (e.g., radios and modems).
6
7

8 **Wireless Media Characteristics [T; Goldhammer]**

9 **Duplex model**

10 The radio regulations permit two access modes: Frequency Division Duplex (FDD) and Time
11 Division Duplex (TDD). The MAC and PHY protocol MUST support both FDD and TDD
12 duplex modes. Spectral efficiency is maximized in FDD with full-duplex operation, while in
13 TDD with means to avoid collocation problems and more complex interference scenarios. The
14 PHY and MAC protocols MUST provide for full duplex operation, while preserving the QoS,
15 BER and spectral efficiency requirements for data and voice traffic. The MAC and PHY
16 protocols MUST provide means to resolve the collocation and interference problems in TDD
17 deployment.

18 [T; Goldhammer]
19

20 **Channelization**

21 The standards bodies providing channelization recommendations are ITU-R, CEPT and FCC.
22 The allocated bandwidth per operator varies between 5MHz and 120MHz. In Europe, the typical
23 allocated bandwidth is 14MHz. The operators target a good frequency reuse factor, using 4-6
24 sectors for Base Stations. The Base Station bandwidth per sector can be between 1.75MHz and
25 7MHz in in CEPT countries and between 2MHz and 6MHz in MMDS. The MAC and PHY
26 protocols MUST permit the operation with channel spacing per sector of 1.75, 3.5 and 7MHz
27 when using ETSI masks and 2, 3, 5 and 6MHz when using other masks. The typical value for
28 performance analysis SHOULD be 3.5MHz for ETSI mask and 3MHz for MMDS mask. [T;
29 Goldhammer]
30

31 **Cellular deployment**

32 New paragraph In cellular deployment, due to interference, the system spectral efficiency can be
33 considerably lowered. The PHY and MAC protocols SHOULD permit good frequency reuse
34 factors, providing at least 2bit/s/cell. In order to reduce the interference level, the PHY and MAC
35 protocols MUST permit power control per subscriber up-link and SHOULD permit power
36 control per subscriber down-link. The PHY and MAC protocols SHALL permit real-time
37 changing of power levels, as function of propagation conditions, in order to use the minimum
38 power needed for the target BER.
39

40 **6 Class of Service and Quality of Service**

41 This section describes the classes of service and quality of service for 802.16.3 systems.
42 Terminology is borrowed from the Internet Engineering Task Force (IETF) worlds.
43

[E; Freedman: All reference should be revisited] 802.16.3 protocols MUST support classes of service (CoS) with various quality of service (QoS) guarantees to support the services (see section **Error! Bookmark not defined.**7) that an 802.16.3 system MUST transport. Thus, 802.16.3 protocol standards MUST define interfaces and procedures that accommodate the needs of the services with respect to allocation of prioritization of bandwidth. Additionally, 802.16.3 protocols MUST provide the means to enforce QoS contracts and Service Level Agreements [2] (see section). Table 1 provides a summary of the QoS requirements that the PHY and MAC SHALL provide. Note that delay in the table refers to the transmission delay from the MAC input from the upper layer at the transmit station to the MAC output to the upper layer the receiving station for information transmission. It does not include setup time, link acquisition, etc.

For QoS-based, connectionless, but not circuit-based, services, the 802.16.3 protocols MUST support bandwidth negotiation “on-demand” [9]. For instance, the MAC protocol MAY allocate bursts of time slots to services that require changes in bandwidth allocation. Such allocation is thus performed in a semi-stateless manner. A connection-oriented service may require “state” information to be maintained for the life of a connection. However, the 802.16.3 MAC layer interface MAY provide a connection-less service interface that requires a higher-layer “adaptation” to maintain the “state” of a connection and periodically allocate bandwidth. For instance, the MAC may need to maintain “state” information about a QoS data flow only for the duration of an allocation.

Table 1: Services and QoS Requirements

Service	MAC Payload Rate	Maximum Ratio	Maximum Delay (One way)
Circuit-Based [T; Trinkwon: delete circuit-based params]			
High Quality Narrowband/Voice Frequency Telephony (Vocoder MOS \geq 4.0)	32 kbps – 64 kbps	10^{-6} _{BER}	5-20 [T; Trinkwon] msec
Lower Quality Narrowband/Voice Frequency Telephony (Vocoder MOS < 4.0)	6 kbps – 16 kbps	10^{-4} _{BER}	10-20 [T; Trinkwon] ms
Variable Packet [71]			
Time Critical Packet Services	4-13 kbps (voice) and 32-1.5 Mbps (video)	BER 10^{-6}	10ms 1/4 of the VoIP codec end-to-end delay [T; Goldhammer] 100 ms [T; Wachira] 20 ms [T; Trinkwon]
Non- Time Critical Services: IP, IPX, FR... Audio/video streaming, Bulk data transfer etc..	\leq 10 Mbps	BER 10^{-8} ⁸ -6; T; Trinkwon	N/A 20 ms [T; Trinkwon]

6.1 Types and Classes of Service

The fundamental direction for the QoS model that will be exported to the BWA endpoints will be IP based and conform to IETF DiffServ QoS model in conjunction with other IP based protocols. ~~The~~ **The [E; Freedman]** DiffServ QoS model defines traffic for all services as follows:

- 1
- 2 • Expedited forwarding (EF) EF requires a constant, periodic access to bandwidth. The
- 3 bandwidth requirements vary over time, within a specified range, but delay and delay
- 4 variance limits are specified. Examples that fall into this category are voice-over-IP (VoIP),
- 5 videoconferencing, video on demand (VoD), and other “multimedia” applications.
- 6 • Assured Forwarding (AF): In AF the bandwidth varies, within a specified range, but has
- 7 loose delay and delay variance requirements. Applications, which are limited in their
- 8 bandwidth usage, may fall into this category. In one example, corporate database
- 9 transactions could be relegated to this category. 'Assured Forwarding' service allows the
- 10 traffic to be divided into different classes. Using this service, an ISP can offer an "Olympic"
- 11 service model, which provides three tiers of services: gold, silver and bronze with decreasing
- 12 quality (i.e, the gold level of service receives a higher share of resources than silver during
- 13 times of congestion). This service model would support, for example, the ability to provide
- 14 preferential treatment to subscribers willing to pay a "premium" price for better service. Or it
- 15 would support more granular priorities such as giving preference to VoIP traffic over other
- 16 traffic e.g., HTTP).
- 17 • Best Effort Service (BES). The bandwidth varies within a wide range, and is allowed to
- 18 burst up to the maximum link bandwidth when EF and AF traffic are not using bandwidth.
- 19 The bandwidth and delay requirements may or may not be specified. Higher variations of
- 20 delay may be tolerable since applications that fall into this category allow for priority traffic
- 21 to preempt their bandwidth consumption. Bandwidth is delivered on a “best effort” basis.
- 22 Current Internet service is an example of this type of operation.
- 23

24 6.2 Parameters

25 The 802.16.3 protocols SHALL define a set of parameters to meet the required QoS parameters

26 for the supported services (e.g., ATM CBR Services and IP)~~802.16.3 protocols SHALL define a~~

27 ~~set of parameters that preserve the intent of QoS parameters for IP-based services.~~[T; Kostas]

28 6.3 Service QoS Mappings

29 The classes of service and QoS parameters of services SHALL be translated into a common set

30 of parameters defined by 802.16.3.

31 A QoS-based IP network may employ the Resource Reservation Protocol (RSVP) [70] to

32 “signal” the allocation of resources along a routed IP path. If 802.16.3 is to be a “link” in the IP

33 network, an IWF MUST interface with 802.16.3 to negotiate resource allocation.

34

35

36 The basic mechanism available within 802.16.3 systems for supporting QoS requirements is to

37 allocate bandwidth to various services. 802.16.3 protocols SHOULD include a mechanism that

38 can support dynamically-variable-bandwidth channels and paths (such as those required for IP-

39 and ATM-based services)~~(such as those defined for IP environments)~~[T; Kostas].

40 7 Management

41 As outlined in IEEE Std 802-1990 [21], The LLC Sublayer, MAC Sublayer and Physical Layer

42 standards also include a management component that specifies managed objects and aspects of

43 the protocol machine that provide the management view of managed resources. The aspect of

44 management considered are (FCAPS):

45

- 1 • Fault management
- 2 • Configuration management
- 3 • Accounting management
- 4 • Performance management (see also)
- 5 • Security (see also section)

6
7 The 802 standards define a framework for LAN/MAN management in ISO/IEC 15802-2:
8 1995(E) [24]. The framework contains guidelines for managed objects, management protocol,
9 and the relationship to ITU management protocols ([SNMP/CORBA/CMP/CMIS/T; Trinkwon](#)).

10 **7.1 Service Level Agreements**

11 The 802.16.3 protocols MUST permit operators to enforce service level agreements (SLAs) with
12 subscribers by restricting access to the air link, discarding data, dynamically controlling
13 bandwidth available to a user or other appropriate means [3]. The 802.16.3 protocols MUST
14 also permit subscribers to monitor performance service levels of the 802.16.3 services being
15 provided at the delivery point.

16 **7.2 Malfunctioning Subscriber Station or Base Station**

17 The operator MUST have means to shut down a subscriber station if necessary, remote from the
18 subscriber station, in the face of a malfunction. The operator also MUST have the means to shut
19 down a base station remotely. The 802.16.3 protocols SHOULD support a function that
20 automatically shuts down transmission from a subscriber station or base station in case of
21 malfunction (e.g., power limits exceeded).

22
23 [Note from Trinkwon: This needs further elaboration / discussion / contribution. Power control
24 loops are probably fundamental for most FWA / customer unit applications and it must not be
25 possible to exceed a maximum permitted power level. Also, if a SU is "shut down" it must be
26 possible to re-enable it (without visiting the customer location) to diagnose and fix / dispatch etc.
27 There are also functions necessary to handle Primary / secondary power conditions, software
28 downloads/ upgrades, performance and error statistics, and to re-program the allowed base
29 station /channel lists for a given SU - or all Sus in a given area / subset of criteria.]

30 **7.3 Accounting and Auditing**

31 The 802.16.3 system management framework, architecture, protocols and managed objects
32 MUST allow for operators to effectively administer accounting and auditing. An operator
33 MUST be able to account for time- and bandwidth-utilization and the various QoS parameters
34 for each subscriber. Also recall from Section that a single subscriber station can interface to
35 multiple subscribers that an operator could bill separately.

36 **8 Security**

37 The 802.16.3 system SHALL enforce security procedures described in this section.

38
39 The security system chosen by 802.16.3 SHALL be added to the protocol stack and reference
40 points to include security protocols, and "database" servers for authentication, authorization, key
41 management, etc. [29] [30]

42
43 [Note from Trinkwon: Needs further expansion / contribution to handle installation, service

[suspend/resume, relocation, geolocation and anti-cloning processes.](#)]

8.1 Authentication

There are two levels of authentication for an 802.16.3 system. The first level of authentication is when the subscriber station authenticates itself with the base station at the subscriber station's network entry. This initial authentication **MUST** be very strong in order to prevent “enemy” subscriber station from entering the network or an “enemy” base station from emulating a real base station. Once the initial authentication at this level is complete, future authentication at this level can be a little more relaxed. This level of authentication **MUST** be supported by the 802.16.3 MAC layer.

The second level of authentication is between the subscriber and the BWA system. This may or may not be the responsibility of the 802.16.3 protocols. It **MAY** be handled by higher layer protocols.

An additional level of authentication may exist between the other two. This additional layer is the authentication of the subscriber with the subscriber station. This is beyond the scope of the 802.16.3 protocols.

The authentication mechanisms **MUST** be secure so that an “enemy” subscriber station is not able to gain access to an 802.16.3 system, or to the core network beyond. Passwords and secrets **MUST NOT** be passed “in the clear” through the air interface.

8.2 Authorization

Authorization is a security process that determines what services an authenticated subscriber is permitted to invoke. Each subscriber has a set of credentials that describe what the subscriber is “allowed” to do. The 802.16.3 standard **SHALL** identify a standard set of credentials and allow for vendors to extend the defined credentials with non-standard credentials. Some possible credentials are:

- Permission to access the 802.16.3 system
- Permission to request up to a defined QoS profile (bandwidth, delay, etc.)
- Permission to operate certain services (IP, Remote Bridging, Digital Audio/Video, etc.)

Subscriber authorization requests and responses **MUST** be transacted securely.

8.3 Privacy

Privacy is a security concept that protects transmitted data from being intercepted and understood by third parties (e.g., an “enemy” subscriber station, base station or passively “listening” radio). Wire-equivalent privacy (WEP) [10] and shared private key [10] privacy have been suggested as minimum required privacy levels for 802.16.3 systems.

802.16.3 standards **SHOULD** allow a strong cryptographic algorithm to be employed that is internationally applicable. Facilities **SHOULD** also be defined in the protocol for the use of alternate cryptographic algorithms that can be used in certain localities and that can replace algorithms as they are obsoleted or “legalized” for international use.

1 **9**

As mentioned in some earlier sections of this document, 802.16.3 SHOULD strive to fit into the 802 system model. Some particulars with the 802 model (see *IEEE Standards for Local and Metropolitan Area Networks: Overview and Architecture* (IEEE Std 802-1990) [21]) are:

- 5
- 6 • The 802.16.3 MAC supports 802 “universal” 48 bit addresses.
- 8 • ~~An 802.16.3 system supports MAC multicast. Note that 802.16.3 protocols support multicast~~
- 9 ~~_____ [T; Trinkwon]~~
- 11 • ~~_____ port 802.1 bridging services and protocols, including support of~~
- 12 ~~_____ [T; Trinkwon]~~
- 14 • ~~_____ [T;~~
- 15 ~~_____~~
- 16

Conform to the 802 conventions and structures for “interface primitives:” logical structures that are passed between protocol layers to invoke processes and transact data.

- 20 •
- 21 Provide a MAC service interface that complies to 802 conventions [22].

Appendix

Requirements Summary

Requirements are separated into three categories: required, recommended and optional.

Each requirement is numbered for easy reference. Future revisions of this document will keep change from revision to revision.

To better discern the meaning and intent of a requirement, please refer to the text.

a requirement is most likely to affect are also given: MAC, PHY, Management (MGMT), and Security (SEC). This additional information, selected by the editor, is meant as a guideline *all* requirements.

It is mandatory that the 802.16.3 standard support or specify the items in Table 2.

2: Mandatory Requirements

	Section	Requirement	Mostly
--	---------	-------------	--------

M1	1	The forthcoming air interface standard MUST comply with the system requirements.	All
M2	1.1	The 802.16.3 air interface interoperability standard SHALL be part of a family of standards for metropolitan area networks.	All
M3	2	802.16.3 systems SHALL be deployable in multiple-cell frequency reuse system configuration and in single super cell frequency reuse system configuration.	MAC PHY
M4	2	The 802.16.3 system SHALL be deployable as a Point-to-Multi-point system.	MAC PHY
M5	2.1	The standard (e.g., MAC/PHY protocols) SHALL describe common access protocol(s) and common modulation technique(s).	MAC PHY
M6	2.2	All data traffic in a single cell of an 802.16.3 network MUST go through the base station.	MAC
M7	2.2	The base station SHALL serve as a radio resource supervisor.	MAC
M8	2.2	802.16.3 protocols MUST provide the means to multiplex traffic from multiple subscriber stations in the downstream direction, and provide for a means to resolve contention and allocate bandwidth capacity [E; Wachira] in the upstream direction.	MAC
M9	3.1.2	802.16.3 systems and protocols MUST support the QoS requirements of the telephony services: <ul style="list-style-type: none"> • POTS via Voice Over IP • NxDS0 via Voice over IP • FT1/FE1 reconfigured from NxDS0 at the CPE. 	MAC
M10	3.1.2.1	The amount of delay between a user speaking and another user hearing the speech MUST be kept below a certain level to support two-way conversation.	MAC PHY
M11	3.1.2.1	BWA protocols MUST support efficient transport of encoded voice data in terms of bandwidth, reliability and delay.	MAC PHY
M12	3.1.2.2	MUST meet the pass through requirements of telephony signaling, whether TDM- or message-oriented.(For further study)	MAC
M13	3.1.4	802.16 MUST directly transport variable length IP datagrams efficiently.	MAC
M14	3.1.4	Both IP version 4 and 6 MUST be supported.	MAC
M15	3.1.4	The 802.16.3 IP service MUST provide support for real-time and non-real-time services.	MAC
M16	4	The MAC protocol MUST define interfaces and procedures to provide guaranteed service to the upper layers.	MAC
M17	4	The MAC protocol MUST efficiently resolve contention and bandwidth-capacity [E; Wachira] allocation.	MAC

M18	4	Further details, and finalization of the protocol reference model, SHALL be worked out by the 802.16.3 MAC and PHY task groups while developing the air interface interoperability standard.	All
M19	5.2	802.16.3 protocols SHALL be optimized to provide the peak capacity up to 2 and enable up to 10 Mbps	MAC PHY
M21	5.4	The 802.16.3 specifications SHALL NOT preclude the ability of the radio link to be engineered for different link availabilities, based on the preference of the system operator.	PHY
M22	5.4	802.16.3 MAC and PHY protocols MUST accommodate atmospheric conditions, perhaps consuming more radio bandwidth and/or requiring smaller radio propagation distance (radius) to meet the availability requirements.	MAC PHY MGMT
M23	5.4	Since statistical atmospheric conditions vary widely in geography, the 802.16.3 protocols MUST be flexible in consumed radio bandwidth (spectral efficiency), cell radius, and transmit power to accommodate a rain allowance that varies with geography.	MAC PHY MGMT
M24	5.5	The error rate, after application of the appropriate error correction mechanism (e.g., FEC), delivered by the PHY layer to the MAC layer SHALL meet IEEE 802 functional requirements: The bit error rate (BER) is 10E-9.	MAC PHY
M26	5.6	The budget for the 802.16.3 system transit delay and access delay MUST be derived. The MAC layer may have different requirements for each direction, upstream and downstream.	MAC PHY
M27	5.6	In the upstream direction, time MUST be budgeted for requesting bandwidth and contending among nodes.	MAC
M28	5.7	In a given 802.16.3 system instance, capacity MUST be carefully planned to ensure that subscribers' quality of service guarantees and maximum error rates are met.	MGMT
M29	5.7	The MAC and PHY protocols MUST accommodate channel capacity issues and changes in channel capacity to meet contracted service levels with customers.	MAC PHY MGMT
M30	5.7	As subscribers are added to 802.16.3 systems, the protocols MUST accommodate them in an automated fashion.	MAC MGMT
M31	6	802.16.3 protocols MUST support classes of service (CoS) with various quality of service (QoS) guarantees to support the services that that support IP protocol.	MAC
M32	6	802.16.3 protocol standards MUST define interfaces and procedures that accommodate the needs of the services with respect to allocation of prioritization of bandwidth capacity [E: Wachira].	MAC
M33	6	802.16.3 protocols MUST provide the means to enforce QoS contracts and Service Level Agreements.	MAC MGMT
M35	6	For QoS-based, connectionless the 802.16.3 protocols MUST support guaranteed bandwidth in provisioning process of the system	MAC

M37	6.2	802.16.3 protocols SHALL define a set of parameters that preserve the intent of QoS parameters for IP-based services.	MAC
	7.1	The 802.16.3 protocol MUST permit operators to enforce service air link, discarding data, dynamically controlling bandwidth available to a user or other appropriate means.	MGMT
M45		The 802.16.3 protocols MUST permit subscribers to monitor performance service levels of the 802.16.3 services being provided	MAC PHY
M46	7.2	subscriber station if remote from the subscriber station, in the face of a This is a part of DOCSIS provisioning	MAC PHY
M48	7.3	protocols and managed objects MUST allow for operators to effectively administer accounting and auditing via the SNMP	MAC MGMT
	7.3	An operator MUST be able to account for time- and bandwidth-	MAC
M50		The 802.16.3 system SHALL enforce security procedures described in section This will be implemented with the Baseline Privacy solutions available today.	MAC
M51	8	protocol stack) and reference points to include security protocols, and “database” servers for authentication, authorization, key	SEC
M52		This initial authentication MUST be very strong in order to prevent an “enemy” “enemy” base station from emulating a real base station.	MAC
M53	8.1	layer.	MAC
M54	8.1	subscriber station to the core network beyond.	MAC
M55	8.1	the air interface.	MAC
M56	8.2	and allow for vendors to extend the defined credentials with non-standard credentials.	SEC MGMT
	8.2	Subscriber authorization requests and responses MUST be Protocol to support link layer encryption between the CPE and the BS,	MAC SEC

Recommended (R)

It is recommended that the 802.16.3 standard support or specify the items in Table 3
 “Recommended” means that there may exist valid reasons in particular circumstances to ignore an item, but the full implications should be understood and the case carefully weighed before choosing a different course.

Table 3: Recommended Requirements

#	Section	Requirement	Affects Mostly
R1	1.2	802.16.3 SHOULD support more than one paying customer at a single access point to a subscriber BWA radio.	MAC MGMT SEC
R3	3	An 802.16.3 system SHOULD support the services described in section	MAC PHY MGMT
R4	3.1	The MAC and PHY protocols may not have explicit support for each and every service, since they SHOULD be handled as data streams in a generic fashion.	MAC PHY
R5	3.1.1	802.16.3 SHOULD efficiently transport digital audio/video streams to subscribers.	MAC PHY
R6	3.1.2	802.16.3 systems SHOULD support supplying telephony to subscribers in a way that eases the migration of legacy telephony equipment and public switched telephone network (PSTN) access technologies to 802.16.3 systems.	MAC PHY MGMT
R9	3.1.4	For efficient transport of IPv6, TCP/IP header compression over the air interface SHOULD be supported.	MAC
R10	3.1.4	It SHOULD be possible to support the emerging IP Quality of Service (QoS) efforts: Differentiated Services and Integrated Services.	MAC
R11	3.1.6	The 802.16.3 protocols SHOULD NOT preclude the transport of the following services: <ul style="list-style-type: none"> • Back-haul service • Virtual point-to-point connections • Frame Relay Service 	MAC
R12	5.1	The 802.16.3 protocols SHOULD allow for different “scales” of capacity and performance for 802.16.3 system instances.	MAC PHY
R13	5.2	802.16.3 MAC protocol SHOULD allow the upper range of delivered bandwidth to scale beyond 10 Mbps.	MAC PHY
R14	5.3	802.16.3 protocols SHOULD allow for flexibility between delivered	MAC

		upstream and downstream bandwidth and CoS/QoS.	PHY
	5.4	An 802.16.3 system SHOULD be available to transport all services better than _____ from about 99.9 to <u>99.94</u> _____ % of the time, assuming that the system and equipment availability.	PHY
	5.4	802.16.3 MAC and PHY protocols SHOULD specify functions and accommodate rapid changes in channel characteristics due to atmospheric conditions.	PHY MGMT
	5.6	In a telephony network, the maximum acceptable end-to-end delay	MAC PHY
	5.7	The following parameters of an 802.16.3 system SHOULD be <ul style="list-style-type: none"> • _____ • _____ <u>[E; Kasslin]</u> • Upstream/downstream channels' data rates Allocation of prospective subscriber _____ to channels. Note: between channels <ul style="list-style-type: none"> • Types of modulation 	MAC MGMT
R19		802.16.3 protocols SHOULD include a mechanism that can support dynamically-variable-bandwidth channels and paths as defined for	MAC
R20		The 802.16.3 protocols SHOULD support a function that automatically shuts down transmission from a subscriber station or	MAC PHY
R21	8.3	internationally applicable.	SEC
	8.3	Facilities SHOULD also be defined in the protocol for the use of localities and that can replace algorithms as they are obsoleted or "legalized" for international use.	
R23	9	SHOULD strive to fit into the 802 system model.	

Optional (O)

It is optional that the 802.16.3 standard support or specify the items in Table 4.

Table 4: Optional Requirements

#	Section	Requirement	Affects Mostly
	3.1.5	The 802.16.3 protocols MAY support bridged LAN services,	MAC
	5.7	The MAC and PHY standards MAY allow subscribers to hop	MAC PHY
	5.7	Flexible modulation types, power level adjustment, and bandwidth	MAC PHY
	6	The MAC protocol MAY allocate bursts of time slots to services	MAC
O10		The second level of authentication, between the subscriber and the BWA system, MAY be handled by higher layer protocols.	SEC

Vocabulary of Terms

Term	Definition	Reference
Access	End-user connection(s) to core networks - PSTN, ISDN, PLMN, PSDN, Internet, WAN/LAN, CATV, etc. - user accessing the services on behalf of multiple users.	F.1399
Accounting	by the service providers to network operators in line with commercial arrangements.	
Air interface	The common boundary between the subscriber defined by functional characteristics, common radio (physical) interconnection characteristics, and NOTE 1 An interface standard specifies the bi-directional interconnection between both sides of type, quantity and function of the interconnecting means and the type, form and sequencing order of	Based on Rec. ITU-R M.1224
	The process of verifying the identity of a user, terminal, or service provider.	
Authorization	A property by which the rights to resources are	Rec. ITU-R M.1224
Backhaul service	from base stations to the core network.	IEEE 802.16
communication channel bandwidth	of a communication channel available to a user for services (expressed in bit/s or multiples thereof).	
channel bandwidth	The bandwidth of a specified portion of the RF radio interface (expressed in Hz or multiples thereof).	
transmission channel bandwidth	transmission of a specified signal (expressed in Hz or multiples thereof).	
	The common name for all the radio equipment	ITU-R Rec. M.1224

	located at one and the same place used for serving one or several cells. (See also “station”).	
Bearer service	A type of telecommunication service that provides the capability for the transmission of signals between user-network interfaces.	ITU-T Rec. I.112
Broadband wireless access	wireless access in which the connection(s) capabilities are higher than the primary rate.	Rec. ITU-R F.1399
Cell	The radio coverage area of a base station, or of a subsystem (e.g. sector antenna) of that base station corresponding to a specific logical identification on the radio path, whichever is smaller.	Based on Rec. ITU-R M.1224
Cell	A block of fixed length which is identified by a label at the asynchronous transfer mode layer of the B-ISDN protocol reference model.	ITU-T Rec. I.113
Cell delay variation	A component of cell transfer delay, induced by buffering and cell scheduling.	ATM Forum
Cell loss ratio	The proportion of lost cells over the total number of transmitted cells for a connection.	ATM Forum
Channel; communication channel	A specific portion of the information payload capacity, available to the user for services.	ITU-T Rec. I.113
Channel; radio- frequency (RF) channel	A specified portion of the RF spectrum with a defined bandwidth and a carrier frequency and is capable of carrying information over the radio interface.	Rec. ITU-R M.1224
Channel; transmission channel	A means of unidirectional transmission of signals between two points.	ITU-T Rec. I.112
Core network	Core networks include, for example, PSTN, ISDN, PLMN, PSDN, Internet, WAN/LAN, CATV, etc.	Based on Rec. ITU-R F.1399
Customer premises equipment/network	The equipment/network administered by the user.	Based on ITU-T Rec. H.310
Downstream	The direction from base station to subscriber station(s).	IEEE 802.16
Dynamically variable bandwidth	A capability of a system to be able to change the bandwidth of the information payload capacity of a communication channel available to a user for services according to negotiated user requirements.	
Fixed wireless	Wireless access application in which the base	Based on Rec. ITU-R

	station and the subscriber station are fixed.	F.1399
Duplex	Separation of upstream and downstream time.	IEEE 802.16
Internet protocol	Networking protocol defined by IETF standards.	IETF
Interoperability	The ability of multiple entities in different networks or systems to operate together without the need for additional conversion or mapping of states and protocols.	Rec. ITU-R M.1124
Inter-working	The means of supporting communications interactions between entities in different networks or systems.	Rec. ITU-R M.1124
Inter-working function	Mechanism which masks the differences in physical, link, and network technologies by converting or mapping states and protocols into consistent network and user services.	Rec. ITU-R M.1124
Network	A set of nodes and links that provides connections between two or more defined points to facilitate telecommunication between them.	Rec. ITU-R M.1224
Nomadic wireless access	Wireless access application in which the subscriber station may be in different places but must be stationary while in use.	Based on ITU-R Rec. F.1399
plesiochronous mode	A mode where the essential characteristic of time scales or signals such that their corresponding significant instants occur at nominally the same rate, any variation in rate being constrained within specified limits.	ITU-T Rec. G.810 (96), 4.3.5
Point-to-multipoint system	a system that establishes connections between a single specified point and more than one other specified points.	ITU-R Rec. F.1399
Privacy	The provision of capabilities to prevent access of information by unauthorized parties.	ANSI T1.702-1995
Quality of service	The collective effect of service performance which determine the degree of satisfaction of a user of the service. NOTE 1 - The quality of service is characterized by the combined aspects of service support performance, service operability performance, serviceability performance, service security performance and other factors specific to each service. NOTE 2 - The term "quality of service" is not used	ITU-T Rec. E.800 (94), 2101

	sense nor is it used in a quantitative sense for technical evaluations. In these cases a qualifying	
Radio interface	See air interface	
Real-Time (adjective)	Pertaining to the processing or transmission of data according to defined time requirements .	Based on ITU-T Rec. Q.9 (88), 6103
Security	The protection of information availability, integrity and confidentiality, as well as authentication and authorization.	Based on Rec. ITU-R M.1224
Service	A set of functions offered to a user by an organization.	Recs. ITU-R M.1224, M.1308
Station	the common name for all the radio equipment at one and the same place. NOTE - The term "station" may refer to any end-user radio equipment ("subscriber station") or network radio equipment ("base station").	Rec. ITU-R M.1224
Subscriber	A person or other entity that has a contractual relationship with a service provider on behalf of one or more users. (A subscriber is responsible for the payment of charges due to that service provider.)	Rec. ITU-R M.1224
Subscriber station	the common name for all the radio equipment at one and the same place serving one or more users. (See also "station").	Based on Rec. ITU-R M.1224
Supplementary service	A service which modifies or supplements a basic telecommunication service. Consequently, it can not be offered to a customer as a standalone service, rather, it must be offered together with or in association with a basic telecommunication service. The same supplementary service may be common to a number of telecommunication services.	Rec. ITU-R M.1224
Synchronous transfer mode	A transfer mode which offers periodically to each connection a fixed-length block.	Based on ITU-T Rec. I.113
System	A regularly interacting or interdependent group of items forming a unified whole technology.	Recs. ITU-R M.1224, M.1308
Time Division Duplex	Separation of upstream and downstream transmission in the time domain using the same frequency.	IEEE 802.16
Upstream	The direction from subscriber station(s) to base station.	IEEE 802.16
User	Any entity external to the network which utilizes	ITU-T Rec. E.600

	communication.	
Virtual point-to-	Providing a point-to-point connection to a subscriber using a point to multipoint system.	
Wireless access	<p>end-user radio connection(s) to core networks.</p> <p>NOTE 1 - Core networks include, for example, PSTN, ISDN, PLMN, PSDN, Internet, WAN/LAN, CATV, etc.</p> <p>NOTE 2 - The end-user may be a single user or a user accessing the services on behalf of multiple users.</p>	Rec. ITU-R F.1399

Acronyms and Abbreviations

Acronym/Abbreviation	Definition
BBER	Background block error ratio
BER	Bit Error Ratio
B-ISDN	Broadband aspects of ISDN
BNI	Base station network interface
BWA	Broadband Wireless Access
CDVT	Cell delay variation tolerance
CLR	Cell loss ratio
CPE	Customer premises equipment
DSL	Digital Subscriber Line
FDD	Frequency Division Duplex
HFC	Hybrid fiber coax
IP	Internet protocol
ISDN	Integrated Services Digital Network
IWF	Inter-working function
LAN	Local area network
LLC	Logical link control
MAC	Medium Access Control
MAN	Metropolitan area network
MBS	Maximum burst size
MCR	Maximum cell rate
MCTD	Maximum cell transfer delay
OSI	Open Systems Interconnection
PBX	Private Branch Exchange
PCR	Peak cell rate
PDH	Plesiochronous Digital Hierarchy
PDU	Protocol Data Unit
PHY	Physical layer
P-MP	Point-to-multipoint
PSTN	Public Switched Telephone Network
QoS	Quality of service
SCR	Suitable cell rate
SDH	Synchronous Digital Hierarchy
SNI	Subscriber station network interface
TC	Transmission convergence
TDD	Time Division Duplex
UBR	Unspecified bit rate

[Editor's note: these references are not in a particular order. Some of these references are not cited in the text of this document.]

[3] Jim Mollenauer, 802.16sc-99/7 Functional Requirements for the 802.16 Standard.

[4] Brian Petry, 802.16sc-99/8 System Requirements Agenda and On-the-fly Notes from 5/99 Boulder Meeting.

[7] John Liebetreu, 802.16sc-99/13 Dispersive Fade Margin: A Physical Layer Performance Metric.

[10] Marianna Goldhammer, 802.16sc-99/16 MAC Services.

[14] Scott Marin, 802.16sc-99/20 802.16 Services and Applications.

[15] Scott Marin, 802.16sc-99/21 Quality of Service.

[17] Imed Frigui, 802.16sc-99/23 Services and Performance requirements for Broadband Fixed Wireless Access.

[19] Doug Gray, 802.16cc-99/04 WW Spectrum Allocations for BWA.

Requirements - Air Interface for Fixed Broadband Wireless Access Systems.

[20] 802.16 Rationale for a Broadband Wireless Access Air Interface Standard: Meeting the Five Criteria.

IEEE 1990.

[22] ISO/IEC 10039: 1991. Information technology -- Open Systems Interconnection -- Local area networks --

[23] ISO 7498-1:1984. Information technology -- Open Systems Interconnection -- Basic Reference Model.

[24] ISO/IEC 15802-2:1995. Information technology -- Telecommunications and information exchange between

[25] ISO 15802-3:1998. Information technology -- Telecommunications and information exchange between systems -- Local and metropolitan area networks -- Common specifications -- Part 3: Media Access Control (MAC)

[26] ISO/IEC 15802-5:1998. Information technology -- Telecommunications and information exchange between systems -- Local and metropolitan area networks -- Common specifications -- Part 5: Remote Media Access

[27] IEEE 802.1F-1993. IEEE Standards for Local and Metropolitan Area Networks: Common Definitions and Procedures for IEEE 802 Management Information.

Networks.

- [29] IEEE 802.10-1998. IEEE Standards for Local and Metropolitan Area Networks: Standard for Interoperable LAN/MAN Security (SILS).
- [30] IEEE 802.10c-1998. IEEE Standards for Local and Metropolitan Area Networks: Supplement to Standard for Interoperable LAN/MAN Security (SILS) -- Key Management (Clause 3).
- [31] J. Costa ITU-R 9B/134E Broadband Wireless Access Draft New Recommendation ITU-R F.BWA Radio Transmission Systems for Fixed Broadband Wireless Access (BWA) Based on Cable Modem Standards" Apr. 1999.
- [33] H. D. Graves, "A Detailed Analysis of MMDS and LMDS", February 23-26, 1997 IEEE MTT-S Wireless Technology Symposium, Vancouver, Canada, pp. 7-10, Feb 1997.
- [35] H. Izadpanah, D. Gregoire, J. Schaffner, and HP Hsu, "MM-Wave Wireless Access Technology For The Wideband Wireless Local Loop Applications", 1998 IEEE Radio and Wireless Conference (RAWCON'98) Colorado Springs, CO, pp. ,Aug., 1998.
- [36] J. Schaffner, H. Izadpanah, and HP Hsu, "MM-Wave Wireless Technology and Testbed Development for Wideband Infrastructure Access", WCC'98, San Diego, CA, Nov. 1998.
- [37] C.W. Lundgren and W.D. Rummler, "Digital radio outage due to selective fading observation vs. prediction from laboratory simulation," Bell System Technical Journal, pp.1073-1100, May-June 1979.
- [38] M. Emshwiller, "Characterization on the performance of PSK digital radio transmission in the presence of multipath fading," ICC'78 Conference Record, Toronto, Ontario, CANADA, Paper 47.3.
- [39] Microwave digital radio systems criteria, Bellcore Technical Reference TR-TSY-000752, October 1989.
- [40] W.D. Rummler, R.P. Coutts, and M. Linger, "Multipath fading channel models for microwave digital radio," IEEE Communications Magazine, November 1986, pp.30-42.
- [42] R. Braden et al., "Integrated Services in the Internet Architecture: An Overview", RFC 1633, June 1994.
- [43] S. Blake et al, "An Architecture for Differentiated Services", RFC 2475, December, 1998.
- [44] S. Blake et al, "A Framework for Differentiated Services", Internet Draft, October, 1998.
- [45] "Broadband Radio Access Networks (BRAN); Requirements and architectures for broadband fixed radio access networks (HIPERACCESS)", ETSI Technical Report TR 101 177 V1.1.1 (1998-05).
- [47] Proc. Of 1999 IMT-2000 3rd Generation Wireless Technology Conference. Feb 10-12, 1999. New Orleans, USA.
- [49] Proceedings of 1999 Wireless Symposium. Feb. 22-26, 1999. San Jose, USA.
- [50] R. K. Crane, "Prediction of Attenuation by Rain" IEEE, 1980.
- [51] ITU-T G.826: Error performance parameters and objectives for international, constant bit rate digital paths at or above the primary rate (2/99).
- [52] ITU-R F.1189-1 Error performance objectives for constant bit rate digital paths at or above the primary rate carried by digital radio-relay systems which may form part or all of the national portion of a 27500 km hypothetical reference path. (1995-1997).
- [53] CCIR Recommendation 749, Radio-Frequency channels arrangements for radio-relay systems operating in the 36.0 to 40.5 GHz band. (1992).
- [54] ITU-T Recommendation I.210 (1993) - "ISDN Service Capabilities Principles of Telecommunications Services Supported by an ISDN and the Means to Describe Them".

- [55] W. Stallings, *Data and Computer Communications*, 5th ed., Prentice Hall, 1996.
- [56] G. Almes et. al. "A One-way Delay Metric for IPPM". Internet Draft, May 1999.
- [57] G. Almes et. al. "A Round-trip Delay Metric for IPPM". Internet Draft, May 1999.
- [58] G. Almes et. al. "A One-way Packet Loss Metric for IPPM". Internet Draft, May 1999.
- [59] ITU-T Recommendation I.35IP. Internet Protocol Data Communication Service IP Packet Transfer Performance Parameters.
- [60] C. Demichelis. "Packet Delay Variation: Comparison between ITU-T and IETF draft definitions". Draft, carlo.demichelis@cselt.it.
- [61] M. Hamdi et. al. "Voice Service Interworking for PSTN and IP Networks". IEEE Comm. Magazine, Vol. 37 No. 5, May 1999.
- [63] A. Dutta-Roy. "Cable it's not just for TV". IEEE Spectrum, Vol. 36 No. 5, May 1999.
- [65] L. P. Bermejo et. al. "Service Characteristic and Traffic Models in Broadband ISDN". Electrical Communication, Vol. 64-2/3, 1990, pp.132-138.
- [67] ISO/IEC 8802-2:1998. Information technology -- Telecommunications and information exchange between systems -- Local and metropolitan area networks -- Common specifications -- Part 2: Logical Link Control.
- [68] IEEE P802.14/a Draft 3 Revision 3, Cable-TV access method and physical layer specification Oct. 1998. (unpublished draft)
- [69] **Data-Over-Cable Service Interface Specifications. Radio Frequency Interface Specification V1.1 SP-RFI-104-980724, Cable Television Labs, 1998.**
- [70] RFC-2205 Resource ReSerVation Protocol (RSVP) -- Version 1 Functional Specification. R. Braden, Ed., L. Zhang, S. Berson, S. Herzog, S. Jamin. September 1997. Status: PROPOSED STANDARD.
- [71] Recommendation ITU-R M.1079 (June 1999). Performance and Quality of Service (QoS) Requirements for International Mobile Telecommunications-2000 (IMT-2000).
- [72] Recommendation ITU-R PN530. Propagation of Data and Prediction Methods for Design of Terrestrial Line of Sight Systems.
- [73] Recommendation ITU-T I.356 (October 1996) - B-ISDN ATM layer cell transfer performance.
- [74] Summary of Recommendation ITU-T E.164 (05/97).