

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Enhancement for 4-antenna soft packet combining scheme to improve HARQ performance	
Date Submitted	2004-11-4	
Source(s)	<p>Ari Hottinen, Jianzhong (Charlie) Zhang, Anthony Reid, Kiran Kuchi, Nico Van Waes,</p> <p>Nokia 6000 Connection Drive Irving, TX 75039</p>	<p>Voice: 972-374-0958, 678-576-2462, 972-894-5669, 972-374-0644, 972-894-6872, Fax: 972-894-5937 ari.hottinen@nokia.com, charlie.zhang@nokia.com nico.vanwaes@nokia.com, tony.reid@nokia.com, kiran.kuchi@nokia.com</p>
Re:	IEEE 802.16e D5 Draft	
Abstract	In this contribution, we propose to extend table 314m and allow the case where the initial transmission has a spatial rate of 2 symbols/channel use.	
Purpose	To incorporate the changes here proposed into the 802.16e D4 Draft. Crossed out indicates deleted text , <u>blue indicates new text change to the Standard</u> , and <u>underlined green indicates newly added text from the original contribution</u>	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Enhancement for 4-antenna Soft Packet Combining Scheme to Improve the HARQ Performance

Ari Hottinen, Jianzhong (Charlie) Zhang, Kiran Kuchi, Tony Reid, Nico Van Waes
Nokia

1. Background

In Table 314m of Section 8.4.8.9 in [4], the STC subpacket combining is defined for the 4 transmit antenna case. However, it only includes the case where the initial transmission is of spatial rate of 4 symbols/channel use (spatial multiplexing, matrix C). In this contribution, we propose to extend this table and allow the case where the initial transmission has a spatial rate of 2 symbols/channel use.

2. Proposed Text Change

Table 314m ---- STC subpacket combining (4-tansmit antenna case)

	Initial transmission	Odd re-transmission	Even re-transmission
Space-time code incremental redundancy for matrix B	$S_4^{(0)} = \begin{bmatrix} s_1 & -s_2^* & s_5 & -s_7^* \\ s_2 & s_1^* & s_6 & -s_8^* \\ s_3 & -s_4^* & s_7 & s_5^* \\ s_4 & s_3^* & s_8 & s_6^* \end{bmatrix}$	$S_4^{(odd)} = \begin{bmatrix} s_1 & -s_2^* & s_5 & -s_7^* \\ s_2 & s_1^* & -s_6 & s_8^* \\ -s_3 & s_4^* & s_7 & s_5^* \\ -s_4 & -s_3^* & -s_8 & -s_6^* \end{bmatrix}$	$S_4^{(even)} = \begin{bmatrix} s_3 & -s_4^* & s_6 & -s_8^* \\ s_4 & s_3^* & s_5 & -s_7^* \\ s_1 & -s_2^* & s_8 & s_6^* \\ s_2 & s_1^* & s_7 & s_5^* \end{bmatrix}$
Space-time code incremental redundancy for matrix C	$S_4^{(0)} = \begin{bmatrix} S_1 \\ S_2 \\ S_3 \\ S_4 \end{bmatrix}$	$S_4^{(odd)} = \begin{bmatrix} -S_2^* \\ S_1^* \\ -S_4^* \\ S_3^* \end{bmatrix}$	$S_4^{(even)} = \begin{bmatrix} S_1 \\ S_2 \\ S_3 \\ S_4 \end{bmatrix}$

The MSS shall process the initial transmission, 1st re-transmission and 2nd re-transmission etc in the form of space time decoding. The re-transmission of FEC code word shall use the Chase combing re-transmission.

3. Simulation Results

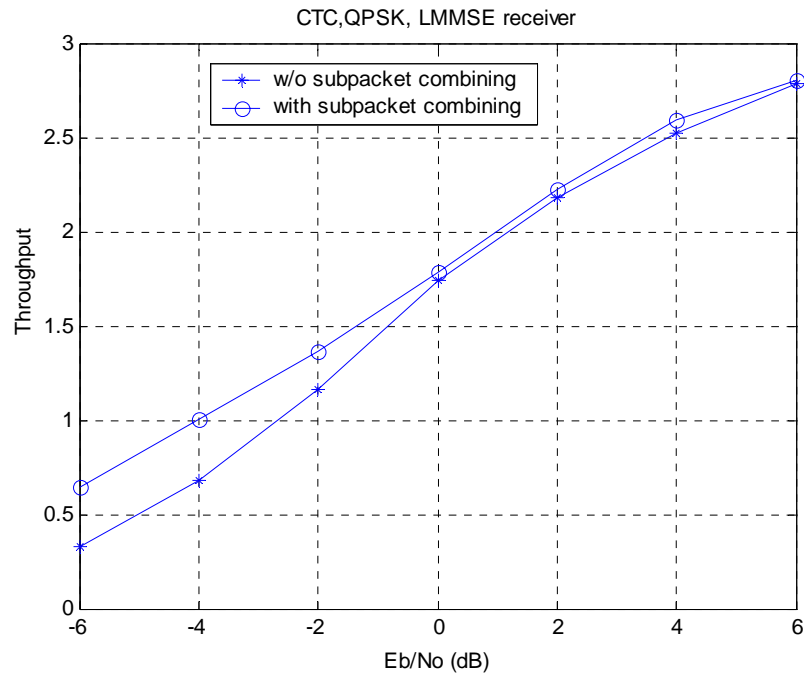


Figure 1. Throughput comparison with and without subpacket combining with matrix B.

In Figure 1, we compare the throughput of the MIMO system for cases with and without subpacket combining, assuming matrix B is used in the initial transmission. It is observed that in the low SNR region, up to 2 dB of gain is possible. The performance gain diminishes as SNR increase, which makes intuitive sense since the higher the SNR, the better the chance that the first transmission will go through.

References

- [1]. IEEE C802.16e-04/113r2, "Soft packet combining for STC retransmission to improve HARQ performance in MIMO mode", Nortel Networks, July 2004.
- [2]. IEEE C802.16e-04/269r1, "Enhancement for 4-antenna soft packet combining scheme using unitary transformation," Texas Instruments, August 2004.
- [3]. IEEE P802.16-REVd/D5-2004 Draft IEEE Standards for local and metropolitan area networks part 16: Air interface for fixed broadband wireless access systems
- [4] IEEE P802.16e/D5, "Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems Amendment for Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands," September 2004

