

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Correction to AMC pilot pattern definition	
Date Submitted	2005-04-28	
Source(s)	Yuval Lomnitz Uri Perlmutter Dov Andelman Intel.	Yuval.Lomnitz@intel.com Uri.PerlMutter@intel.com Dov.Andelman@intel.com
Re:	IEEE P802.16-2004/Cor1-D2	
Abstract	Correction to AMC pilot pattern definition	
Purpose	Adopt changes	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Correction to AMC pilot pattern definition

Yuval Lomnitz, Uri Perlmutter, Dov Andelman

1. Motivation

The AMC pilot location is based on symbol index from beginning of zone ($9k+3m+1$). This definition doesn't take into account special symbols (preamble, sounding, etc).



2. Details

2.1. Problems

The problems in the current definition are:

- In the UL, there are symbols in which are entirely filled by rectangular allocations (e.g. Sounding, Ranging (not in AMC), Safety/PAPR reduction zones). In these symbols there are no slots, and the counting of slots resumes after these symbols (see clarifications done in 802.16Cor1/D2, 8.4.4.5). The current AMC pilot structure ignores this fact, so although the actual data contents (slots) is shifted, the pilots remain in same locations, which means that they move relative to the data slots, as shown in diagram below.
- In the DL, MIMO preamble or AAS preambles may cause similar phenomenon, of shifting the pilot pattern (or more accurately shifting the data subcarriers without similar shift of pilots).

Initial phase depends on number of symbols in DL subframe

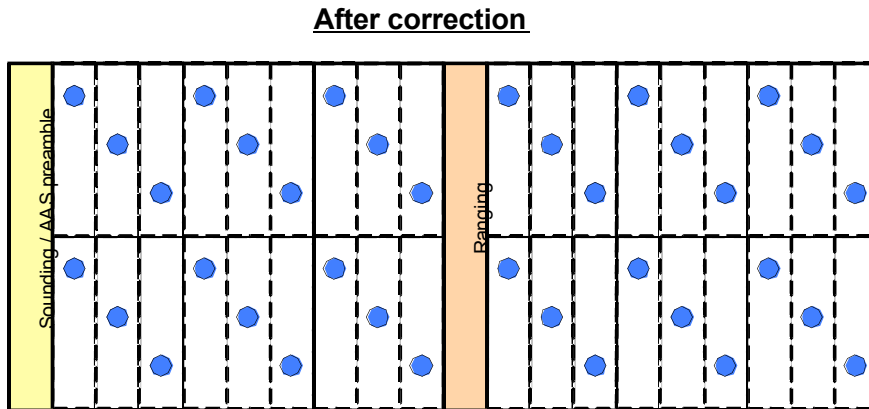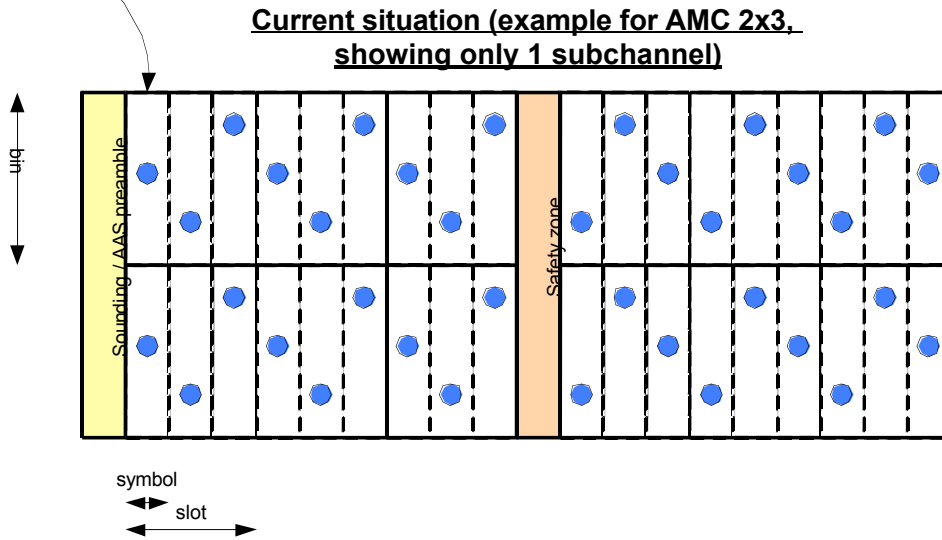

2.2. Proposed solution

The simplest way is to define m as symbol offset from start of slot epoch, but in order to be consistent with OFUSC and with all AMC tile structures, we propose to define that m is the symbol offset from the start of the current zone, counting only data symbols (i.e. Safety zones, Sounding symbols, preambles, etc are not counted).

3. Changes summary

- [Apply the change below to the following tables:
- Table 317a (1024-FFT OFDMA AMC subcarrier allocations)*
- Table 317b—512-FFT OFDMA AMC subcarrier allocations*
- Table 317c—128-FFT OFDMA AMC subcarrier allocations*

]

Pilot Subcarrier Index	$9k+3m+1$ for $k=0,1\dots95$ and $m=[\text{symbol index}] \bmod 3$	Symbol of index 0 in pilot subcarrier index should be the first symbol of the current zone. <i>m is incremented only for data symbols, excluding preambles, Safety zones, Sounding symbols, etc.</i>
------------------------	--	--