

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Enhanced Hierarchical Modulations	
Date Submitted	2007-11-11	
Source(s)	Shu Wang, Soonyil Kwon, Li-Hsiang Sun, Sang G. Kim and Ki-Dong Lee LG Mobile Research U.S.A.* San Diego, CA 92131	Voice: 858-635-5305 E-mail:swang@lge.com *< http://standards.ieee.org/faqs/affiliationFAQ.html >
Re:	IEEE 802.16m-07/040 Call for Contributions on Project 802.16m SDD	
Abstract	The traditional hierarchical modulation scheme, which is simply superposing two user's signal together, is not optimal, most due to strong inter-layer interference. We propose an enhanced hierarchical modulation scheme by rotating enhancement layer(s). We can show that it help achieve higher achievable throughputs, less inter-layer interference, and lower peak-to-average power ratio (PAPR), etc.	
Purpose	To be discussed and adopted by TGM for use in the 802.16m SDD.	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < http://standards.ieee.org/guides/bylaws/sect6-7.html#6 > and < http://standards.ieee.org/guides/opman/sect6.html#6.3 >. Further information is located at < http://standards.ieee.org/board/pat/pat-material.html > and < http://standards.ieee.org/board/pat >.	

Suggested ToC Topic for IEEE 802.16m SDD: Enhancements on Multicast and Broadcast Services (MBS)

Title: Enhanced Hierarchical Modulations

Description: Hierarchical modulation can be taken as an implementation of superposition precoding, which outperform time multiplexing and frequency multiplexing in most time. Hierarchical modulations are widely used in digital broadcast system design, including both dedicated network: DVB-T, Media-FLO, UMB-BCMCS, and hierarchical network: DVB Multiplexing. Hierarchical modulations can help provide different QoS's to users with different profiles, e.g. higher throughput for users with advanced receiver. provide unequal protection on different contents, e.g., video, audio, text, update system to provide better service to new users with advanced receiver with keeping existing users unchanged. However, the traditional hierarchical modulation scheme, which is simply superposing two user's signal together, is not optimal. It is known that there is strong inter-layer interference, which limits the demodulation performance. The enhanced hierarchical modulation scheme by rotating enhancement layer(s) is proposed here and shown in Fig. 1. It is help achieve higher achievable throughputs, less inter-layer interference, higher effective SNR, higher effective power, higher modulation efficiency and lower peak-to-average power ratio (PAPR) for next generation wireless systems.

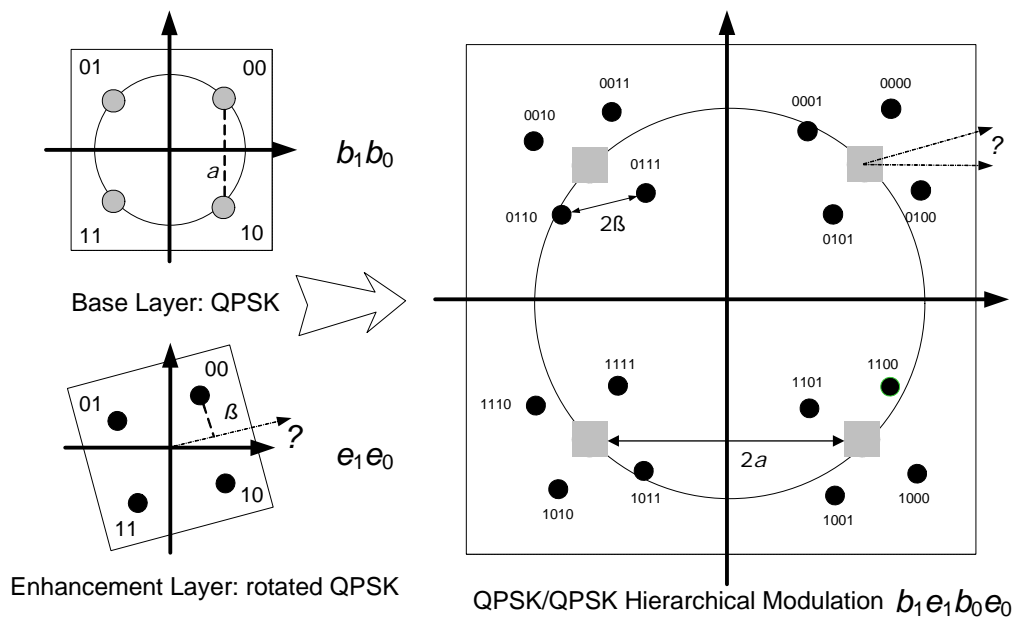


Figure 1. Enhanced Hierarchical Modulation

Related Area(s) in SRD: Section 6.7: Enhanced multicast broadcast service