

|                |  |  |
|----------------|--|--|
| Project        | <b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >   |  |
| Title          | <b>Proposal for Downlink Physical Resource Allocation Unit</b>   |  |
| Date Submitted | <b>2008-03-10</b>  |  |
| Source(s)      | Gene Marsh, Lei Wang, Ramon Khalona,<br>William Burchill<br>NextWave Wireless  | Voice:<br>E-mail:<br><a href="mailto:lwang@nextwave.com">lwang@nextwave.com</a> ;<br><br>* <a href="http://standards.ieee.org/faqs/affiliationFAQ.html">http://standards.ieee.org/faqs/affiliationFAQ.html</a> > |
| Re:            | The IEEE 802.16 Working Group's <i>Task Group m</i> (TGm) 's Call for Contributions on Project 802.16m System Description Document (SDD), IEEE 802.16m-08/005  |  |
| Abstract       | This document describes a proposal for 802.16m DL Physical resource allocation unit. This proposal applies to the 802.16m portion in an 802.16m frame that allows new PHY resource block designs. The legacy system resource allocations are supported in the legacy portion in an 802.16m frame through the same allocation mechanisms in the Legacy systems.   |  |
| Purpose        | To be discussed and adopted by 802.16m SDD.  |  |
| Notice         | <i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>   |  |
| Release        | The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.   |  |
| Patent Policy  | The contributor is familiar with the IEEE-SA Patent Policy and Procedures:<br>< <a href="http://standards.ieee.org/guides/bylaws/sect6-7.html#6">http://standards.ieee.org/guides/bylaws/sect6-7.html#6</a> > and<br>< <a href="http://standards.ieee.org/guides/opman/sect6.html#6.3">http://standards.ieee.org/guides/opman/sect6.html#6.3</a> >.<br>Further information is located at < <a href="http://standards.ieee.org/board/pat/pat-material.html">http://standards.ieee.org/board/pat/pat-material.html</a> > and<br>< <a href="http://standards.ieee.org/board/pat">http://standards.ieee.org/board/pat</a> >. |  |

## Proposal for Downlink Physical Resource Allocation Unit

*Gene Marsh, Lei Wang, Ramon Khalona, William Burchill*


NextWave Wireless

### Introduction

This document describes a proposal for 802.16m DL Physical resource allocation unit. This proposal applies to the 802.16m portion in an 802.16m frame that allows new PHY resource block designs. The legacy system resource allocations are supported in the legacy portion in an 802.16m frame through the same allocation mechanisms in the Legacy systems.

### Proposed DL Physical Resource Allocation Unit

The proposed 802.16m DL physical resource allocation unit is 1 subchannel \* 1 mini-frame, where 1 subchannel consists of 16 adjacent subcarriers in frequency domain, and 1 mini-frame consists of 6 continuous OFDMA symbols in time domain, as shown in Figure 1.

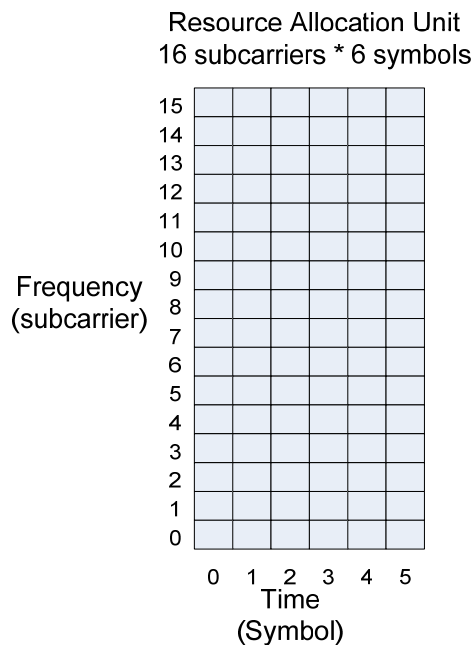

**Figure 1. Proposed Physical Resource Allocation Unit**

The proposed 16-subcarrier \* 6-Symbol Physical allocation unit is permutation type independent, i.e., one resource allocation unit for all permutation types. This is different from the Legacy system where the Physical allocation unit varies with the permutation type, e.g., PUSC and AMC have different allocation units.

We propose that the same resource allocation unit applies to both DL and UL for the 802.16m.

In the time domain, we propose 6 symbols as the size for a mini-frame, i.e., the unit of resource allocations, with the considerations that the 6-symbol mini-frame size fits nicely into the OFDMA

parameters as discussed in the 802.16m frame structure development.

In the frequency domain, we propose 16 adjacent subcarriers as the size of a subchannel, i.e., the unit of resource allocations, with the following considerations:

1. The 16 subcarriers give a nice integer-number incremental step in frequency domain for the proposed subcarrier spacing numbers, e.g.,
  - if subcarrier-spacing=10.9375 KHz as proposed in many 802.16m frame structure contributions; the frequency domain incremental step is  $16 \times 10.9375 = 175$  KHz;
  - if subcarrier-spacing=12.5 KHz as proposed by some 802.16m frame structure contributions, the frequency domain incremental step is  $16 \times 12.5 = 200$  KHz.
2. 16 is a power of 2, which provides flexible numerology:
  - Simple and power efficient DFT implementations;
  - regular pilot placement across the frequency band;
  - regular structure for subcarrier assignments for control channels;
3. The subchannel size of 16 subcarriers fits nicely into different bandwidth (e.g., 5/10/20 MHz) and different FFTs to maximize the utilization of the used subcarriers, as illustrated in the Table 1.

**Table 1. Number of 16-Subcarrier Subchannels for Different Channel Sizes**

| BW (MHz) | $N_{sub}$ | 802.16m $N_{used}$ | 802.16m Occupied BW (MHz) | Subcarrier Spacing (kHz) | PUSC $N_{used}$ | PUSC Occupied (MHz) | FUSC $N_{used}$ | FUSC Occupied BW (MHz) | AMC $N_{used}$ | AMC Occupied BW (MHz) |
|----------|-----------|--------------------|---------------------------|--------------------------|-----------------|---------------------|-----------------|------------------------|----------------|-----------------------|
| 5.00     | 27        | 433                | 4.74                      | 10.9375                  | 421             | 4.60                | 427             | 4.67                   | 433            | 4.74                  |
| 10.00    | 54        | 865                | 9.46                      | 10.9375                  | 841             | 9.20                | 851             | 9.31                   | 865            | 9.46                  |
| 20.00    | 108       | 1729               | 18.91                     | 10.9375                  | 1681            | 18.39               | 1703            | 18.63                  | 1729           | 18.91                 |