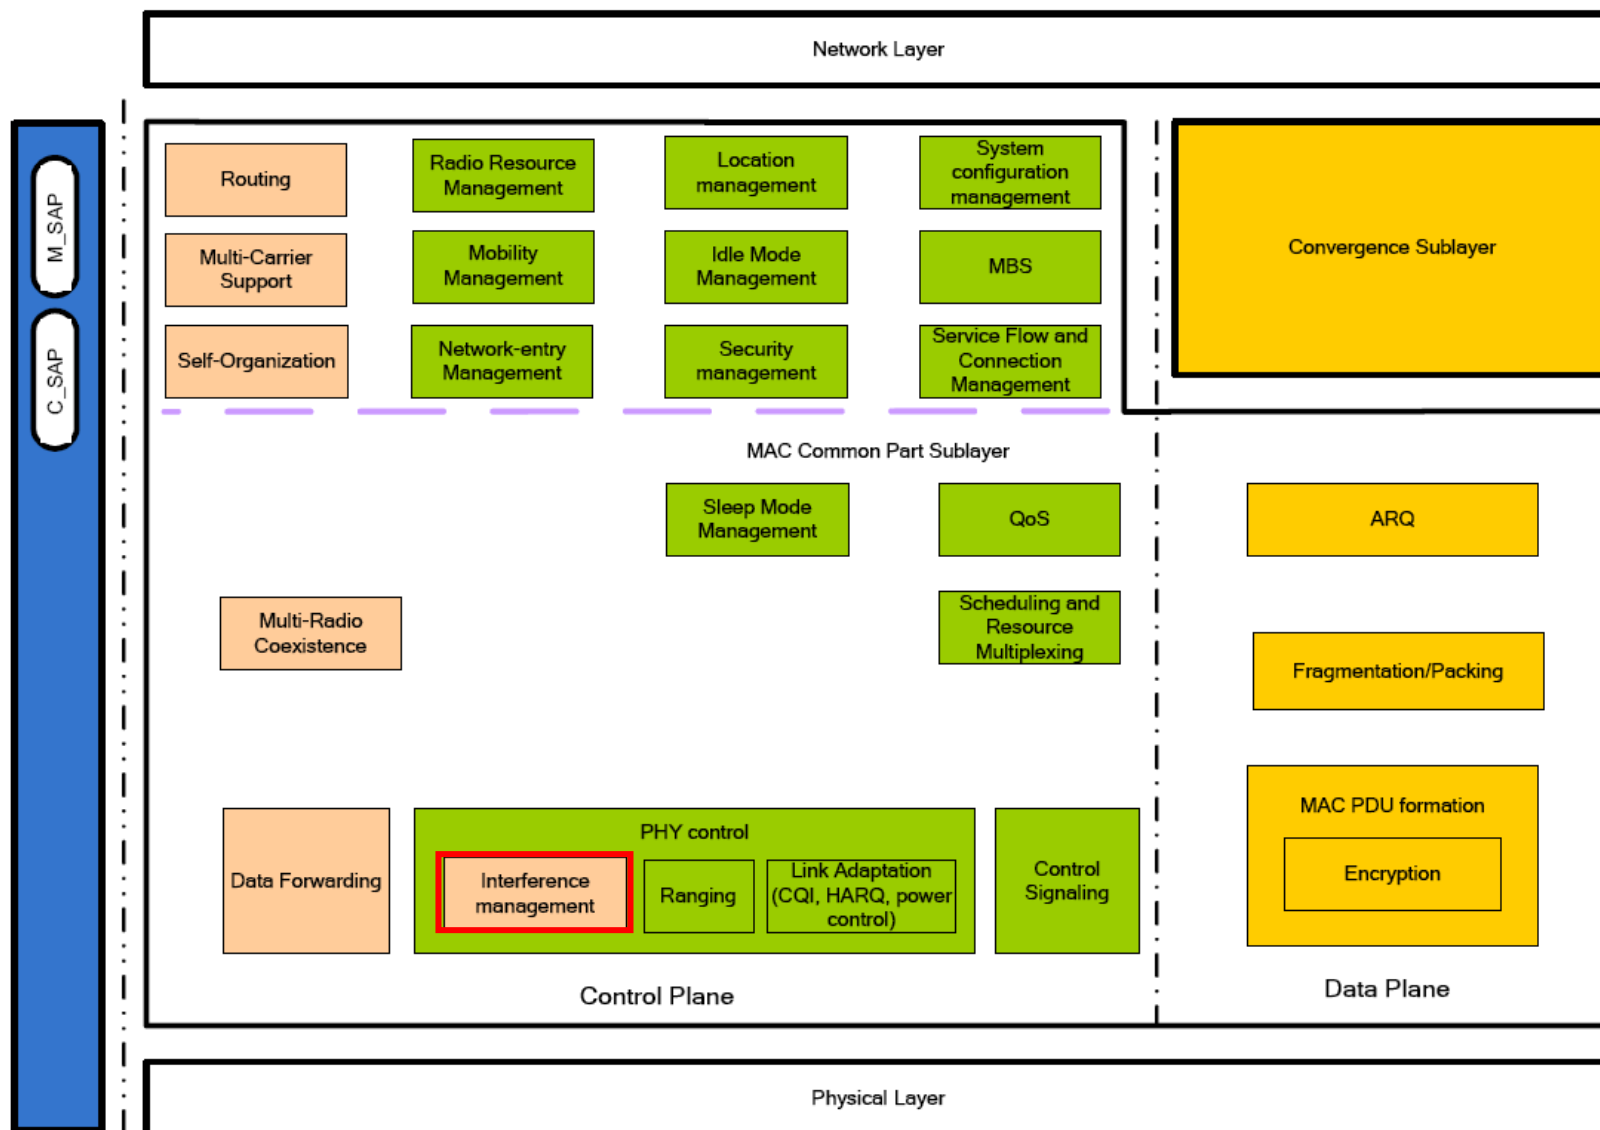

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Inter-Cell Interference Management in DL/UL Control	
Date Submitted	2008-05-05	
Source(s)	Yih-Guang Jan, Yang-Han Lee, Ming-Hsueh Chuang, Hsien-Wei Tseng, Wei Chen Lee, Wei-Chieh Tseng Tamkang University (TKU) Shiann-Tsong Sheu National Central University (NCU) Pei-Kai Liao, Paul Cheng MediaTek Inc. Yu-Tao Hsieh, Pang-An Ting ITRI	E-mail: yihjan@ee.tku.edu.tw stsheu@ce.ncu.edu.tw pk.liao@mediatek.com ythsieh@itri.org.tw
Re:	IEEE 802.16m-08/016r1: Call for Contributions on Project 802.16m System Description Document (SDD). Target topic: "Uplink Control Structures".	
Abstract	This contribution proposes inter-cell interference management in DL/UL control	
Purpose	For discussion and approval by TGM.	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups.</i> It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < http://standards.ieee.org/guides/bylaws/sect6-7.html#6 > and < http://standards.ieee.org/guides/opman/sect6.html#6.3 >. Further information is located at < http://standards.ieee.org/board/pat/pat-material.html > and < http://standards.ieee.org/board/pat >.	

Introduction

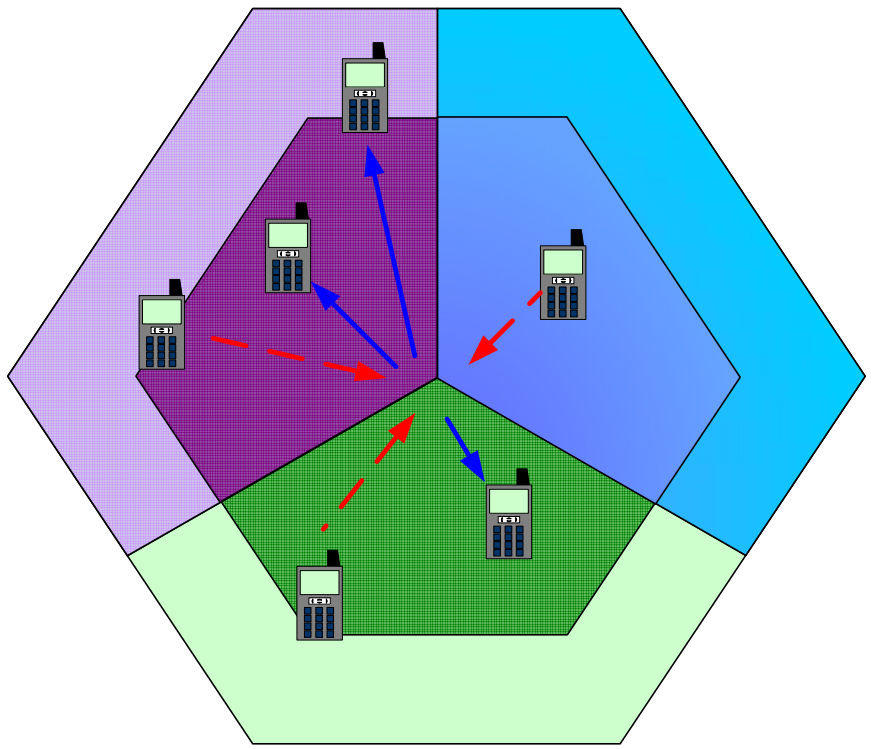
- Purpose
 - Propose several pilot formats for **Interference Management** to reduce interference at **Cell edge** or **Co-channel** between BS and BS, BS and MS or MS and MS.
- Scope
 - DL and UL control channel design for Interference Management
 - Cell edge zone
 - Interference reducing pilot
 - Cell central Zone
 - Common Pilot
 - Interference Management on TDD and FDD frame structure
 - Sub-Frame base design
 - Interference Management on different frequency reuse factor

The IEEE 802.16m Protocol Structure






Interference Type: Data Transition

Data Transition Interference in TDD




Data Transition Interference in FDD

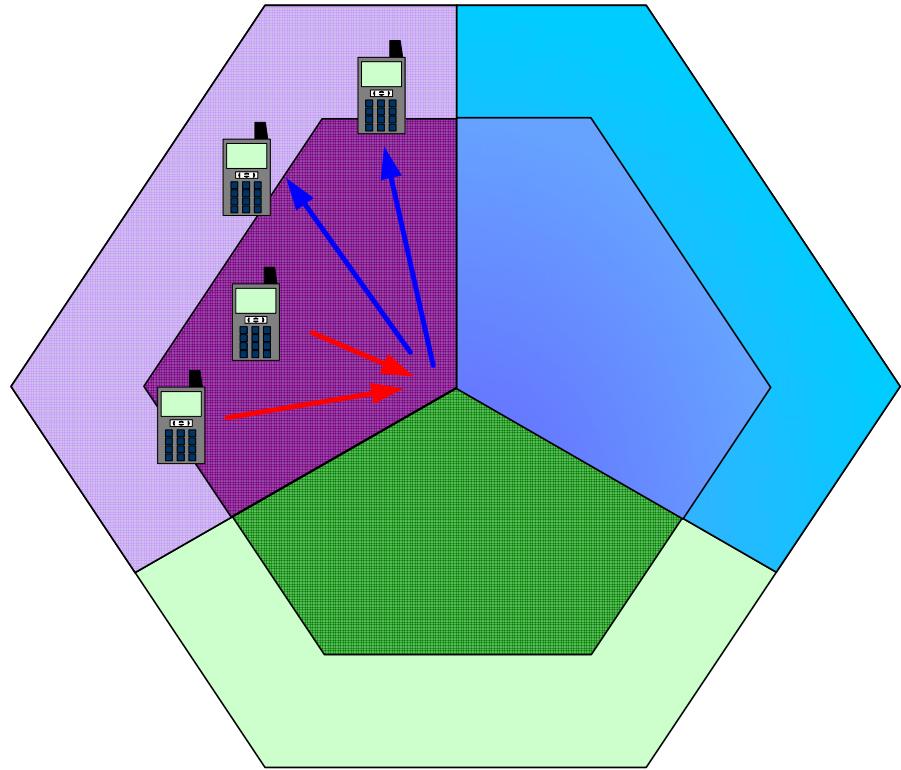


Interference Type: Sector and Cell Edge

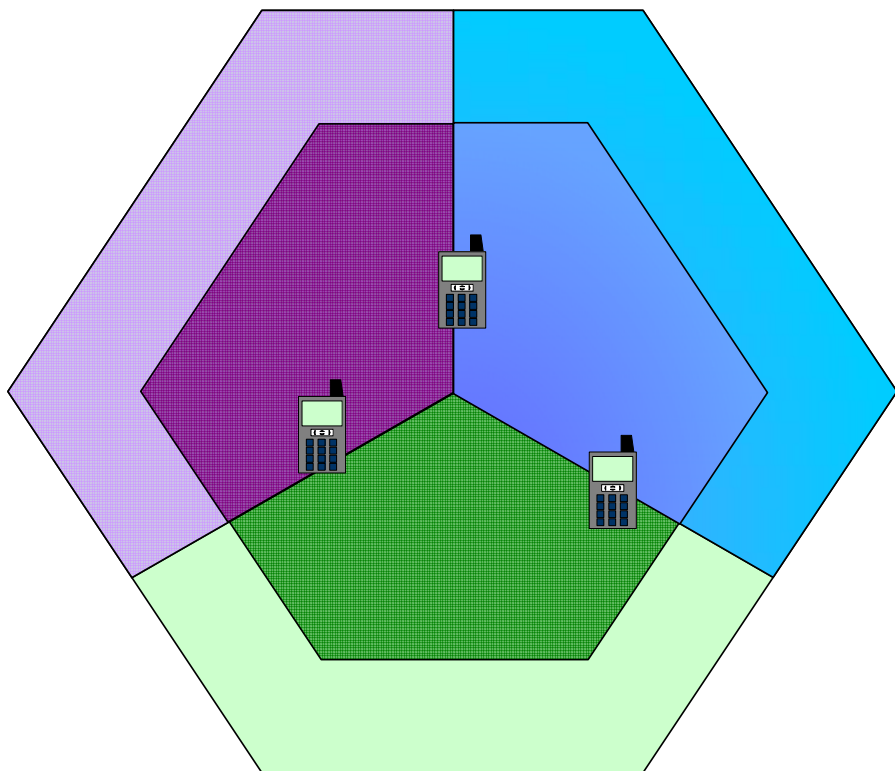
Location-oriented interference:
MS at the sector boundary



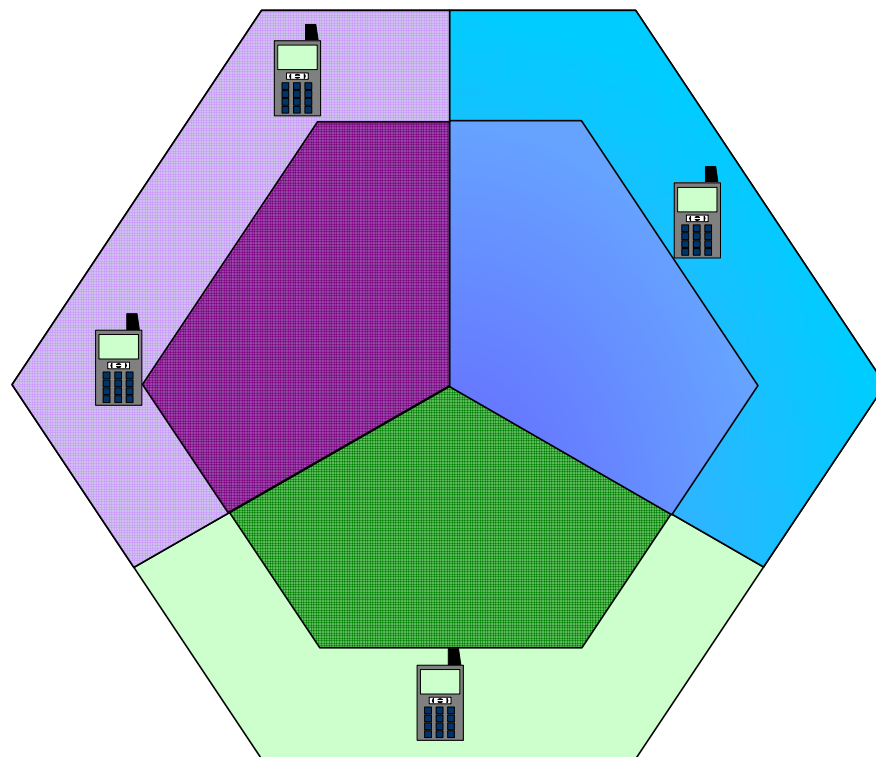Location-oriented interference:
MS in the cell edge zone




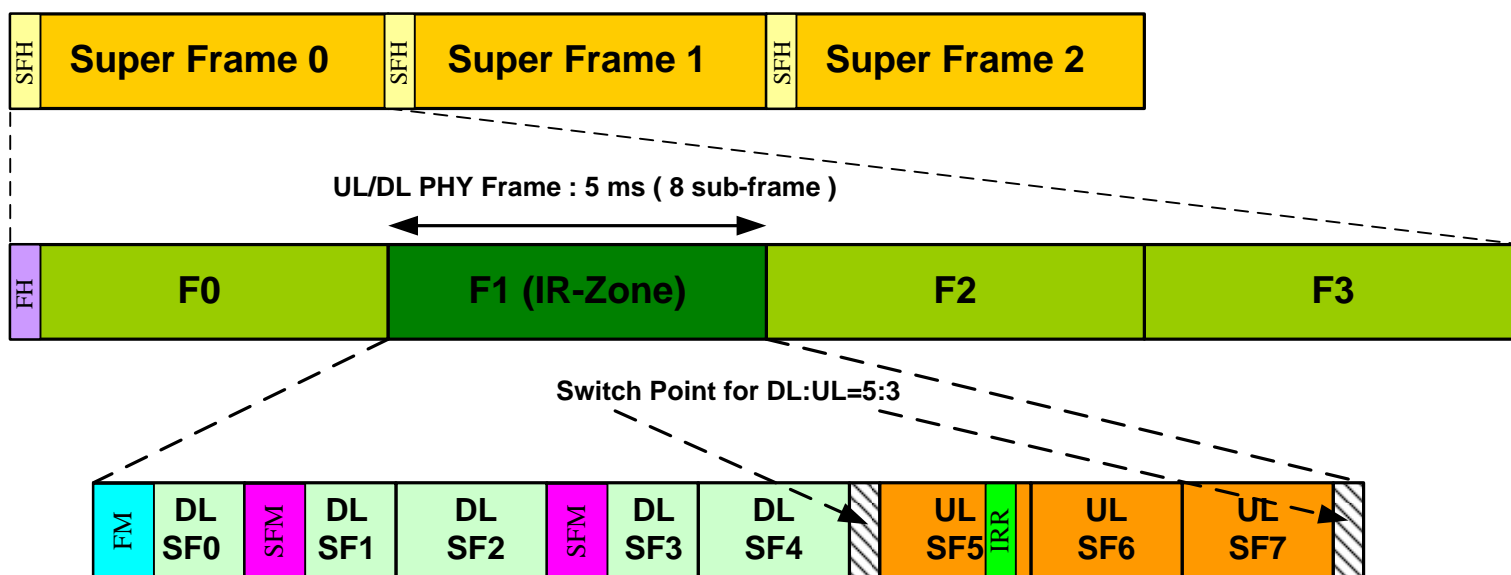Frame Control Channel Structure for 16m (1/3)



Control channel structure for TDD

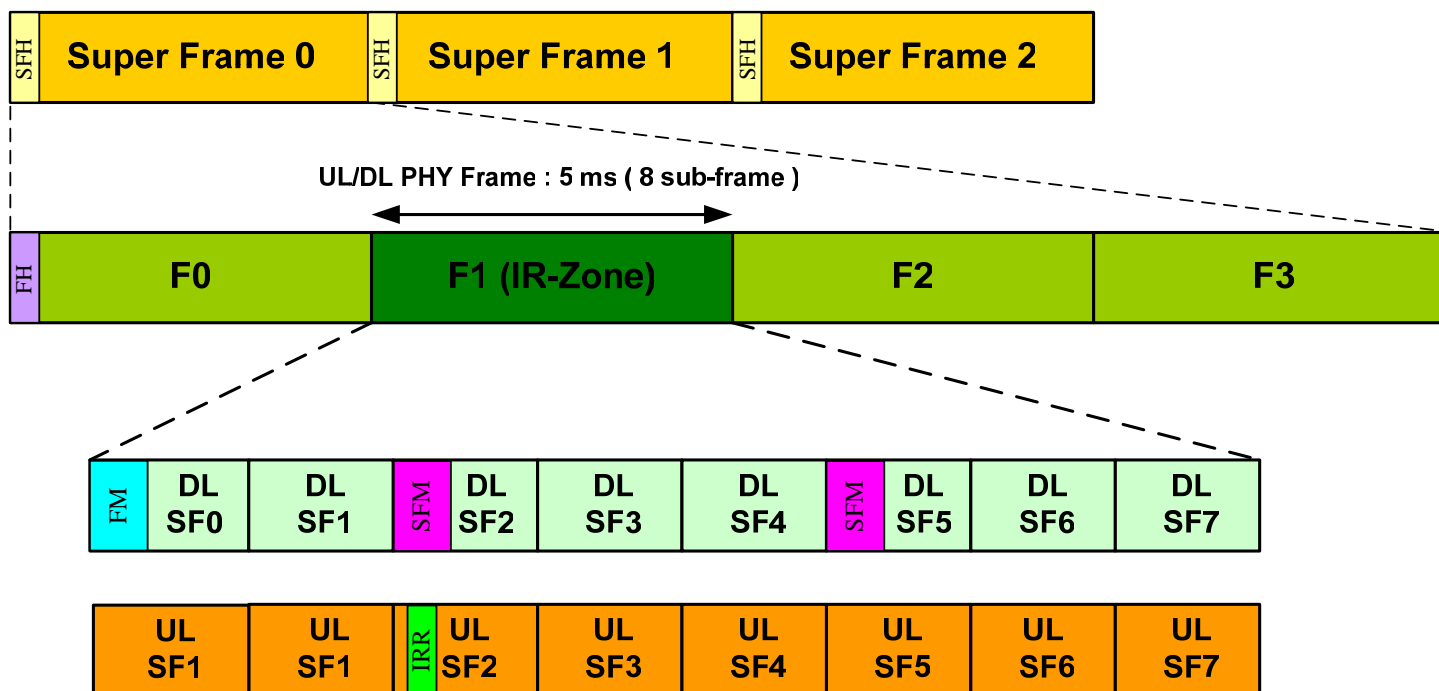Frame Control Channel Structure for 16m (2/3)




Control channel structure for FDD


Frame Control Channel Structure for 16m (3/3)

- **Five types of control channels**
 - **SFH (Super Frame Header):**
 - The SFH is used for the transmission of the information such as the synchronization, frequency reference, cell ID etc.
 - **FH (Frame Header):**
 - The FH will identify which frame should activate an IR-Zone, and when this IR-Zone is activated the MS in this zone will receive the interference reducing service.
 - **FM (Frame Map):**
 - This FM is used to designate MSs locations in the sub-frame for those MSs are not in the interference-reducing zone (IR-Zone).
 - **SFM (Sub-frame Map):**
 - The SFM is used to designate which MSs in this zone need the interference reducing service. The MS designated can be a group of MSs or a single MS. It gives MS the information of the zone location, the orthogonal pilot pattern and it also will provide the relative location information of the UL- zone.
 - **IR-Zone (Interference Reducing Zone):**
 - This zone is activated by the BS and it can be divided into UL and DL IR-zones. The zone's size and location are designated by the FH and the SFM and it also serves those MSs that need interference reducing services.
 - **UL-IRR (Uplink–interference Reducing Request):**
 - The MS will send the instant interference reducing request in this frame and the BS will include this MS which sends this request in the IR-Zone in the next frame.

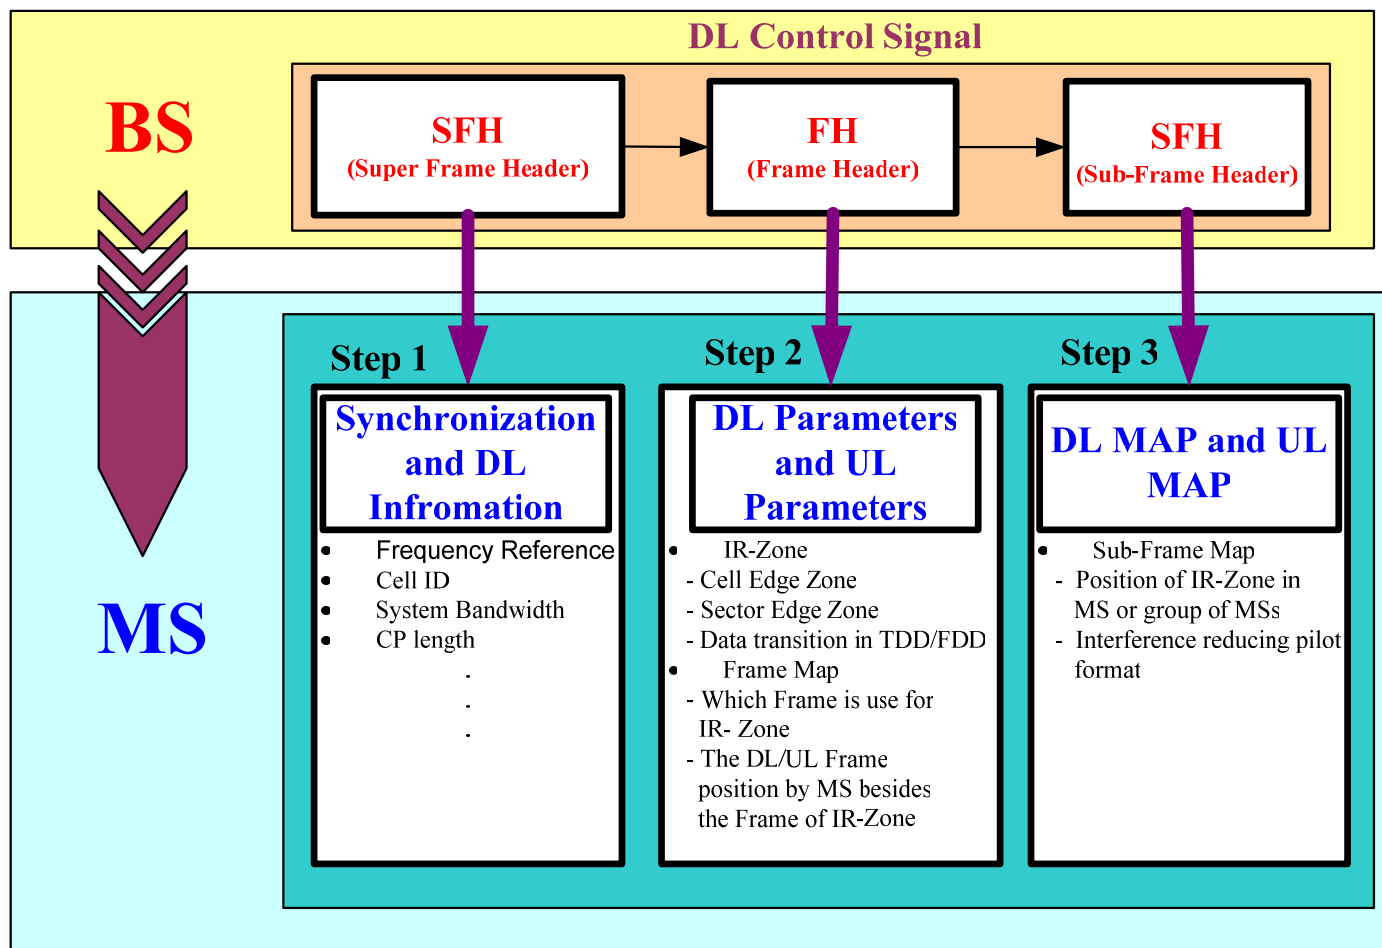Cell Management Information in the DL control Channel




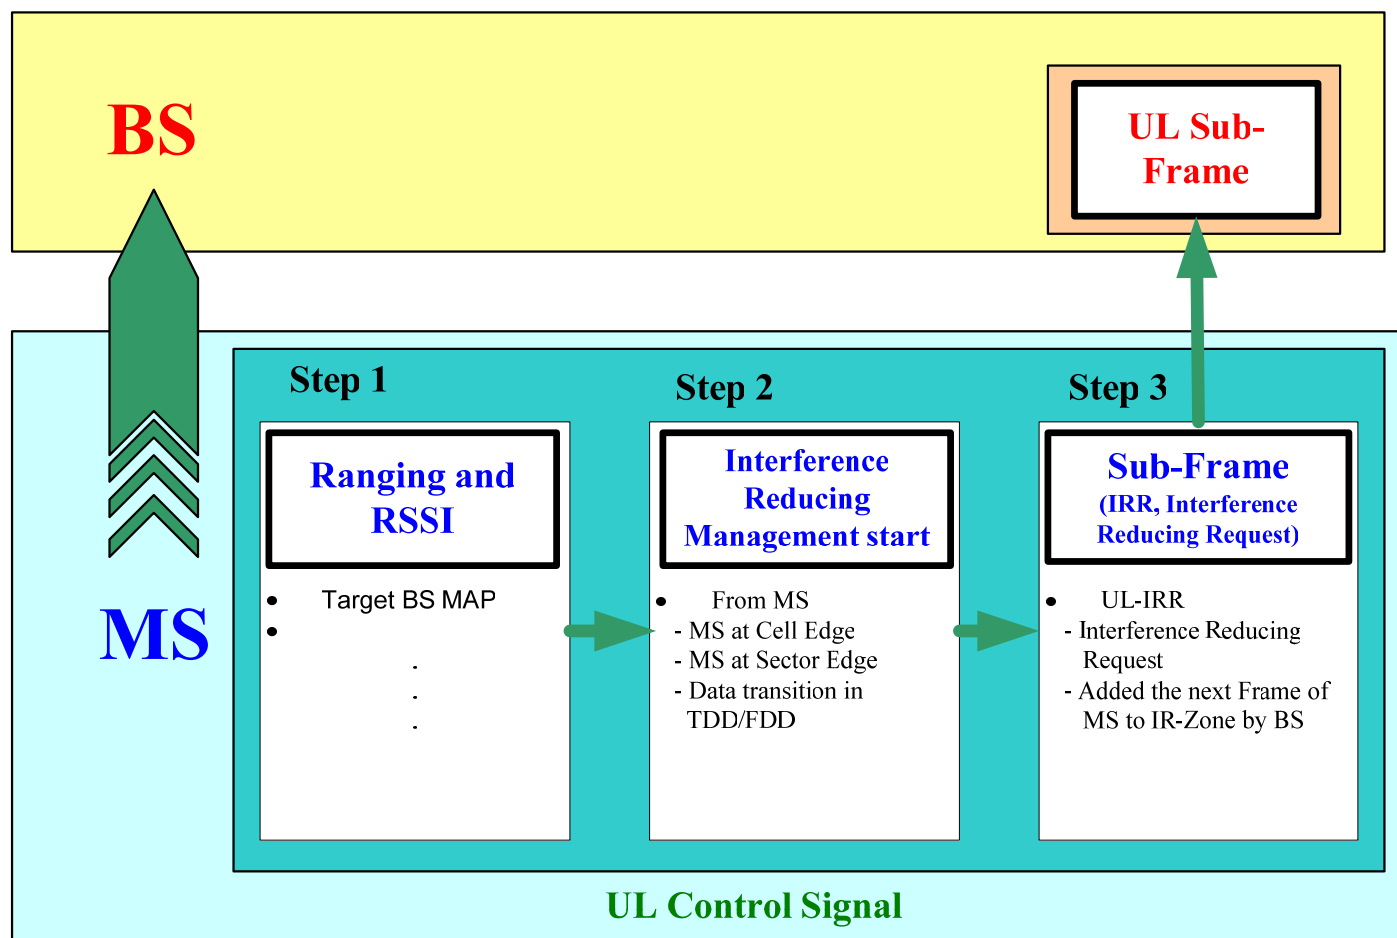Cell Management Information in the UL control Channel




Interference Reducing Pilot Type

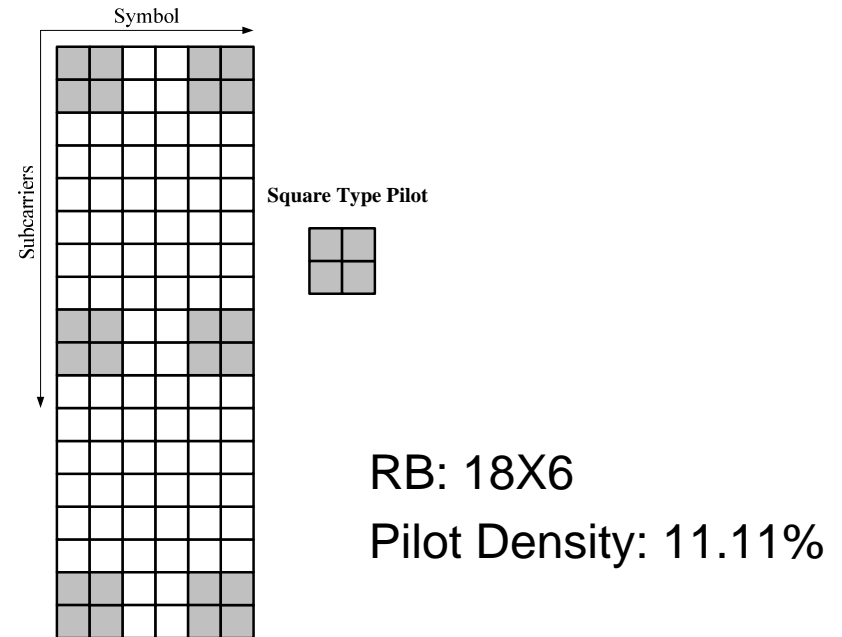- Square Type Pilot




- Line Type Pilot

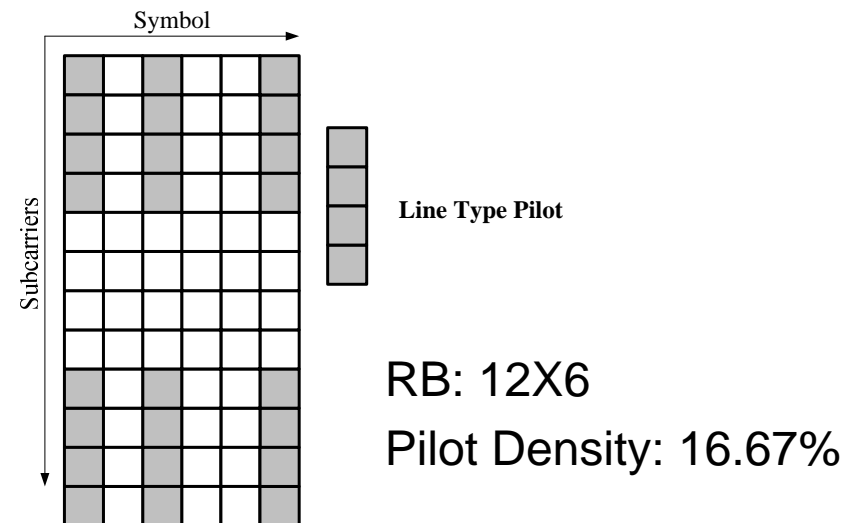

Interference weight assignment for Square type pilot pattern (1/2)

BS Pilot Pattern




Type	Interference weight	Type	Interference weight
1	1	7	0.2
2	0.6	8	0.6
3	0.5	9	0
4	0.8	10	0.5
5	0.4	11	0.4
6	0.5	12	0.5

Interference weight assignment for Square type pilot pattern (2/2)

IR Pilot_M1 Pilot_BS	1	2	3	4	5	6	7	8	9	10	11	12
1	1	0.6	0.5	0.8	0.4	0.5	0.2	0.6	0	0.5	0.4	0.5
2	0.6	1	0.5	0.4	0.8	0.5	0.6	0.2	0.4	0.5	0	0.5
3	0.5	0.5	1	0.5	0.5	1	0.5	0.5	0.5	0	0.5	0
4	0.8	0.4	0.5	1	0.6	0.5	0	0.4	0.2	0.5	0.6	0.5
5	0.4	0.8	0.5	0.6	1	0.5	0.4	0	0.6	0.5	0.2	0.5
6	0.5	0.5	1	0.5	0.5	1	0.5	0.5	0.5	0	0.5	0
7	0.2	0.6	0.5	0	0.4	0.5	1	0.6	0	0.5	0.4	0.5
8	0.6	0.2	0.5	0.4	0	0.5	0.6	1	0.4	0.5	0.8	0.5
9	0	0.4	0.5	0.2	0.6	0.5	0	0.4	1	0.5	0.6	0.5
10	0.5	0.5	0	0.5	0.5	0	0.5	0.5	0.5	1	0.5	0.8
11	0.4	0	0.5	0.6	0.2	0.5	0.4	0.8	0.6	0.5	1	0.5
12	0.5	0.5	0	0.5	0.5	0	0.5	0.5	0.5	0.8	0.5	1

Interference weight assignment for Line type pilot pattern (1/2)

BS Pilot Pattern











Type	Interference weight	Type	Interference weight	Type	Interference weight	Type	Interference weight
1	1	4	1	7	0.5	10	0.5
2	0.6	5	0.6	8	0.5	11	0.5
3	0.5	6	0.5	9	0	12	0.1

Interference weight assignment for Line type pilot pattern (2/2)



IR Pilot_MT Pilot_BS	1	2	3	4	5	6	7	8	9	10	11	12
1	1	0.6	0.5	1	0.6	0.5	0.5	0.5	0	0.5	0.5	0.1
2	0.6	1	0.6	0.5	0.6	0.2	0.8	0.5	0.5	0.4	0.1	0.5
3	0.5	0.6	1	0.5	0.2	0.6	0.4	0	0.5	0.8	0.4	0.5
4	1	0.5	0.5	1	0.5	0.5	0.6	0.6	0.1	0.5	0.5	0
5	0.6	0.6	0.2	0.5	1	0.6	0.5	1	0.6	0	0.5	0.5
6	0.5	0.2	0.6	0.5	0.6	1	0.1	0.5	0.6	0.4	0.8	0.5
7	0.5	0.8	0.4	0.6	0.5	0.1	1	0.6	0.5	0.6	0.2	0.5
8	0.5	0.5	0	0.6	1	0.5	0.6	1	0.5	0.2	0.6	0.6
9	0	0.5	0.5	0.1	0.6	0.6	0.5	0.5	1	0.5	0.5	1
10	0.5	0.4	0.8	0.5	0	0.4	0.6	0.2	0.5	1	0.6	0.5
11	0.5	0.1	0.4	0.5	0.5	0.8	0.2	0.6	0.5	0.6	1	0.6
12	0.1	0.5	0.5	0	0.5	0.5	0.5	0.6	1	0.5	0.6	1

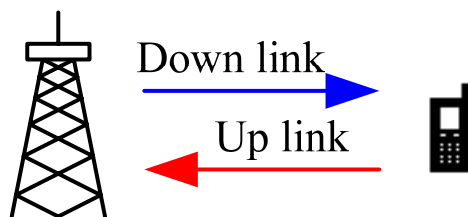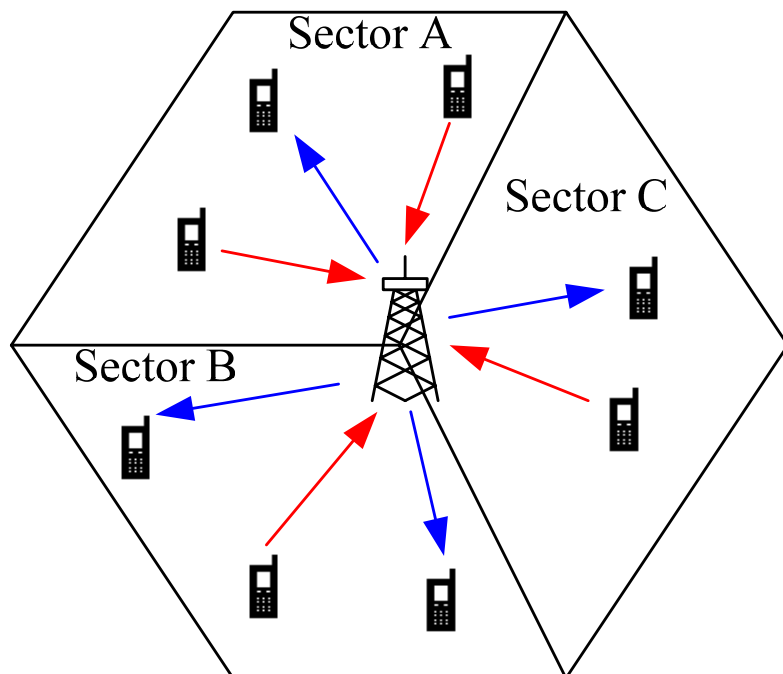

Pilot assignments in TDD segments




DL/UL Sector	DL	UL
A	1 	9 
B	2 	4 
C	3 	10 







Pilots assignment in TDD subframes

Base Station	DL	UL
Sector		
A	1 	9 





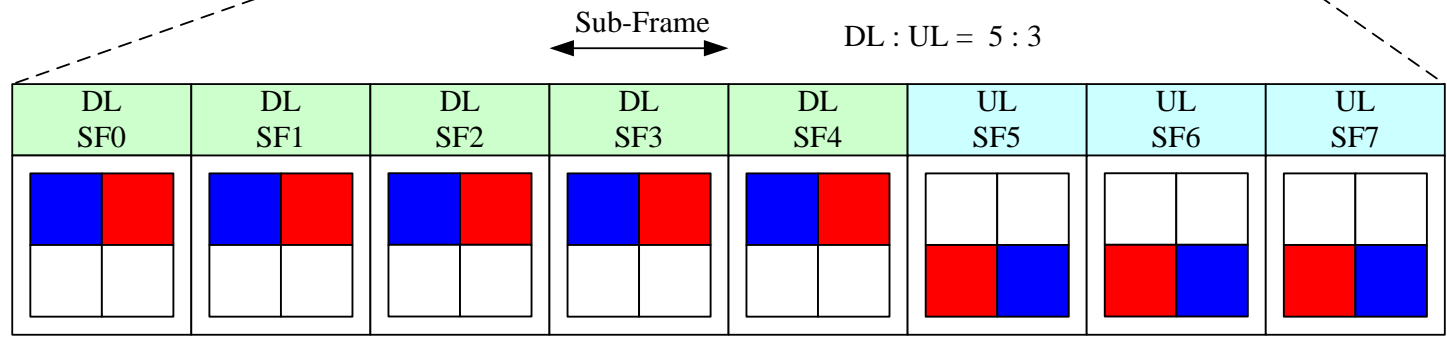
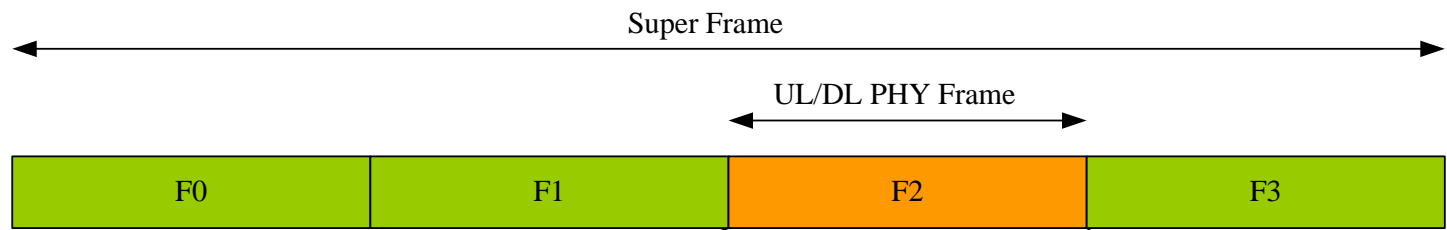


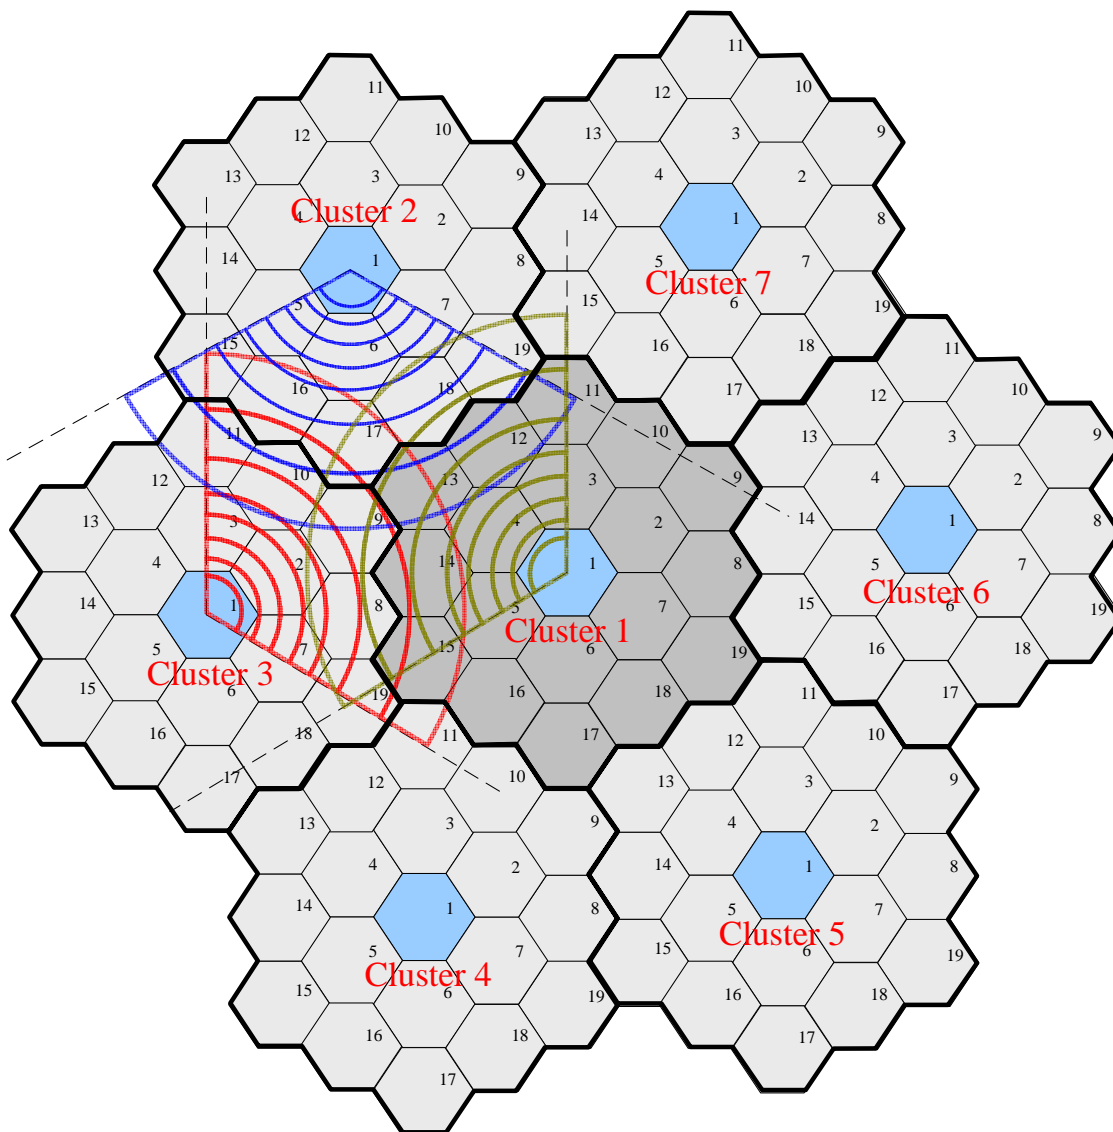Interferences in Pilots Assignment in TDD




Base Station Cluster	DL	UL
Cluster1	1 	9 
Cluster2	2 	4 
Cluster3	3 	10 

Interference weight between any two pilot types assigned for the DL and UL among three clusters

Base Station Cluster	DL	UL
Cluster1	1 	9 
Cluster2	2 	4 
Cluster3	3 	10 





Interference Weight		Cluster 1		Cluster 2		Cluster 3	
		DL	UL	DL	UL	DL	UL
Cluster 1	DL		0	0.6	0.8	0.5	0.5
	UL	0		0.4	0.2	0.5	0.5
Cluster 2	DL	0.6	0.4		0	0.5	0.5
	UL	0.8	0.2	0		0.5	0.5
Cluster 3	DL	0.5	0.5	0.5	0.5		0
	UL	0.5	0.5	0.5	0.5	0	

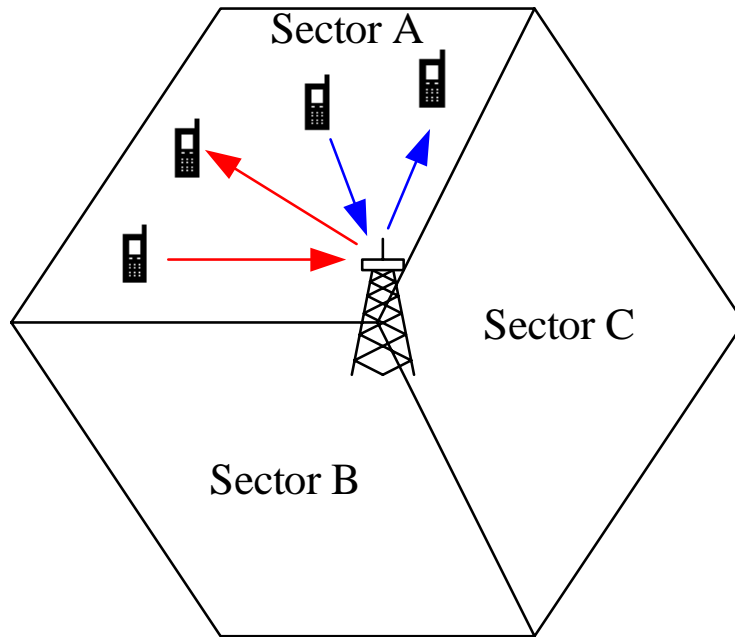Pilot pattern assignment in FDD multiplexing





Frequency 1: ————

Frequency 2: ————


User Frequency	User 1	User 2
1	1 	9 
2	2 	4 

Pilot pattern assignment for down link and uplink subframes in FDD multiplexing

User Frequency	User 1	User 2
1	1	9
2	2	4

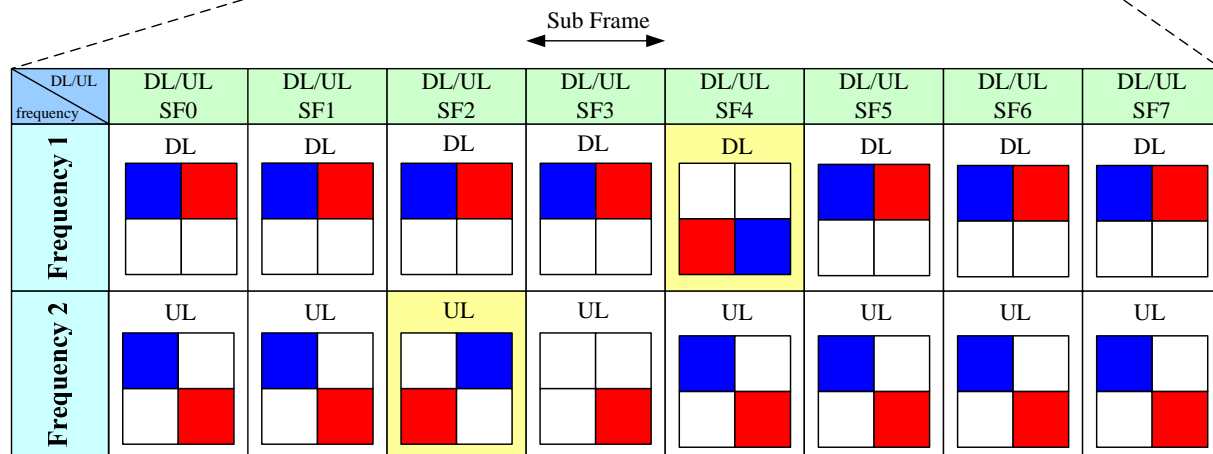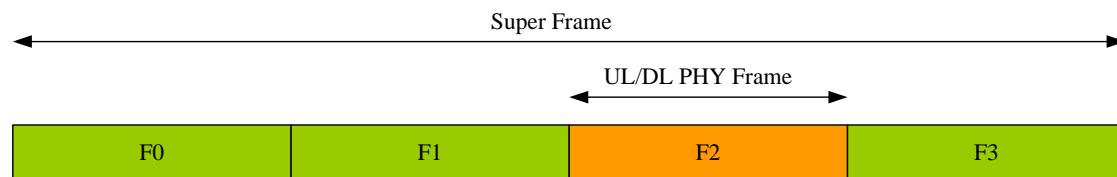













Cell edge interference

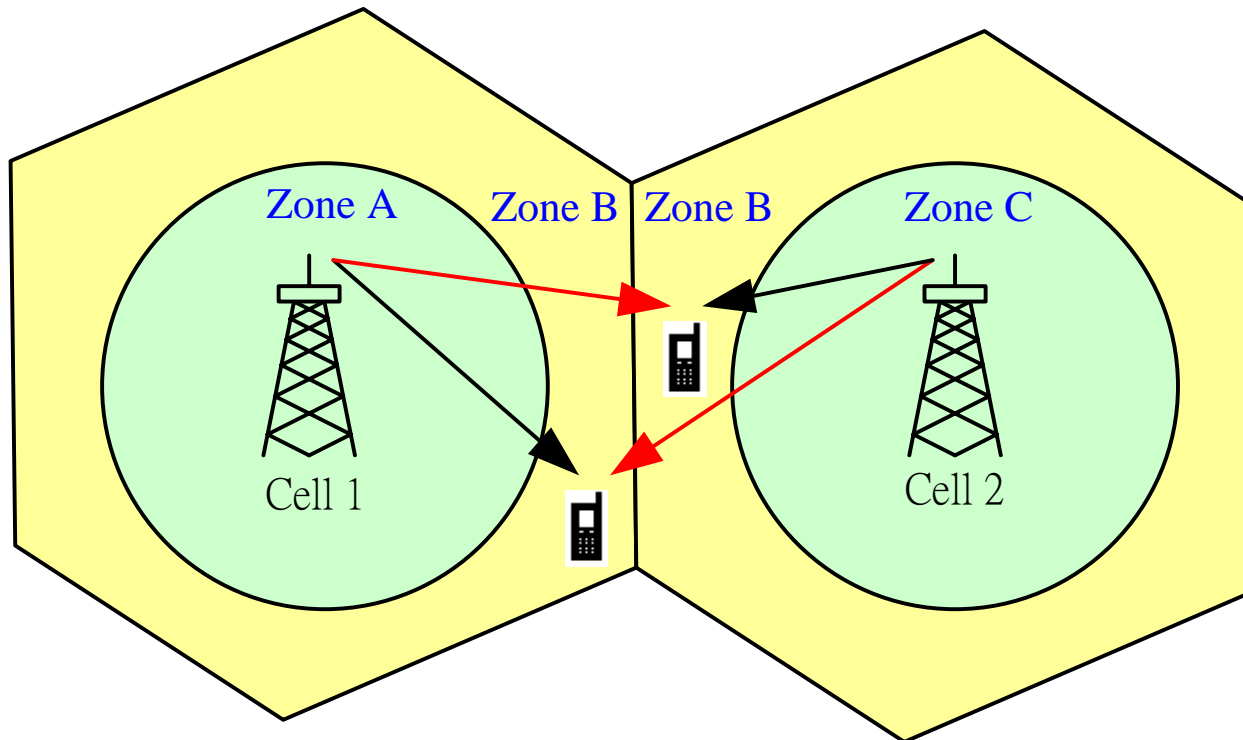

Signal Path: 

Interference Path: 


Orthogonal pilot pattern assignment for cell 1 and cell 2 when the MS is located at the cell edge

Base Station Case	Cell1	Cell2	Interference weihgt
A	1 	9 	0
B	2 	4 	0
C	3 	10 	0
D	4 	7 	0
E	5 	4 	0
F	6 	10 	0

Using Interference Reducing Pilot structure by different BS

<i>Parameter</i>	<i>Value</i>
<i>Carrier Frequency</i>	2.5 GHz
<i>System BW</i>	10 MHz
<i>BS Antenna Gain</i>	17dB
<i>MS Antenna Gain</i>	0dB
<i>BS height</i>	32 M
<i>MS height</i>	1.5 M
<i>Path Loss model</i>	COST231 Hata model
<i>Cell radius</i>	500 M
<i>Number of BS</i>	7
<i>Frequency reuse factor</i>	1

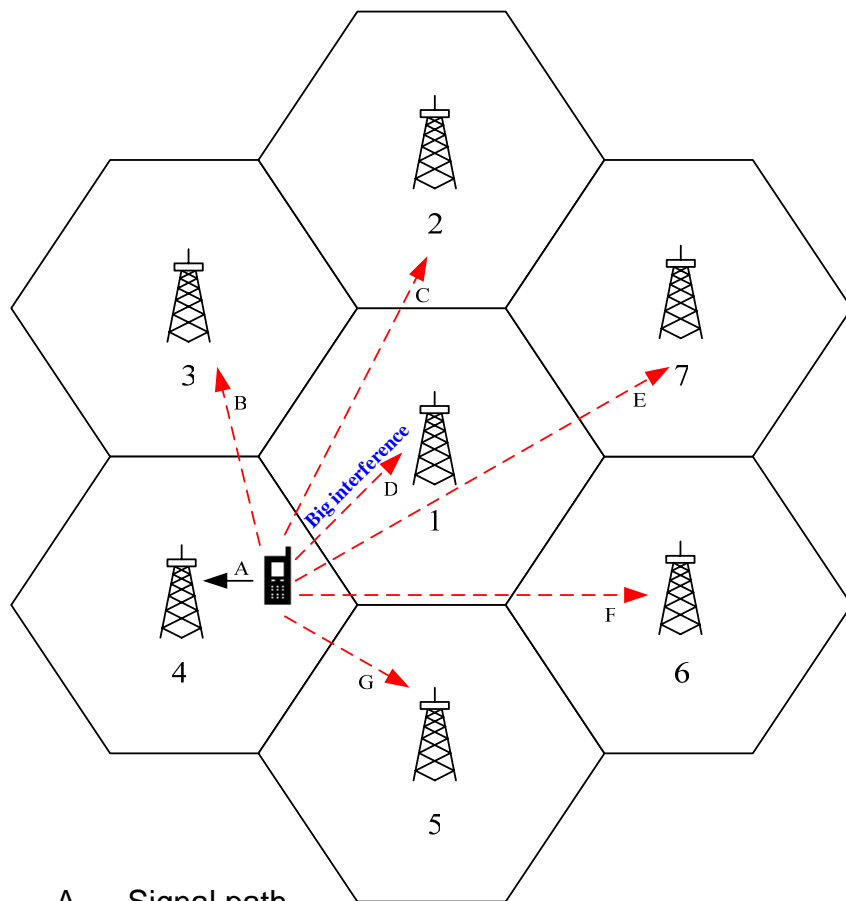Interference introduced from neighboring BSs to the MS



- A. Signal path
- B. Interference path (interference weight: 0.4)
- C. Interference path (interference weight: 0.5)
- D. Interference path (interference weight: 0)
- E. Interference path (interference weight: 0.5)
- F. Interference path (interference weight: 0.6)
- G. Interference path (interference weight: 0.2)







No. BS	Type	Sensitivity (dBm)
4		-119.6224
1		-131.9415
5		-135.7063
3		-135.7182
6		-143.4239
2		-143.4282
7		-145.5291

Serving BS = No. 4 Target BS = No. 1







frequency reuse: 1

Resulting Interference levels by using and without using interference reducing pilots for BSs

IR Pilot

No. BS	Type	Sensitivity (dBm)	Interference weight
1		-131.9415	0
2		-143.4282	0.5
3		-135.7182	0.4
5		-135.7063	0.2
6		-143.4239	0.6
7		-145.5291	0.5

Common Pilot


No. BS	No. BS	Sensitivity (dBm)	Interference weight
1		-131.9415	1
2		-143.4282	1
3		-135.7182	1
5		-135.7063	1
6		-143.4239	1
7		-145.5291	1

Pattern	Serving BS interference (dBm)
IR Pilot	-136.4793
Common Pilot	-128.8767

Using Interference Reducing Pilot structure by different Cluster

<i>Parameter</i>	<i>Value</i>
<i>Carrier Frequency</i>	2.5 GHz
<i>System BW</i>	10 MHz
<i>BS Antenna Gain</i>	17dB
<i>MS Antenna Gain</i>	0dB
<i>BS height</i>	32 M
<i>MS height</i>	1.5 M
<i>Path Loss model</i>	COST231 Hata model
<i>Cell radius</i>	500 M
<i>Cluster</i>	7
<i>Number of BS</i>	19
<i>Frequency reuse factor</i>	19

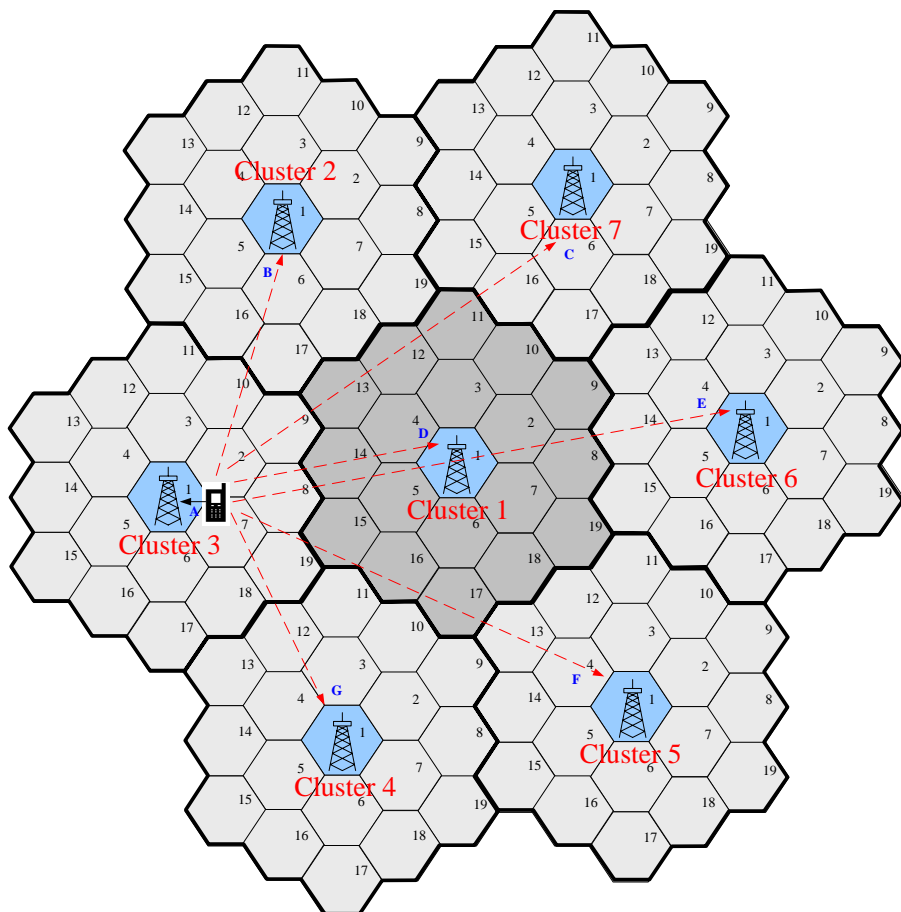MS uses the same frequency to communicate with all cluster BSs









- A. Signal path
- B. Interference path (interference weight: 0.5)
- C. Interference path (interference weight: 0.5)
- D. Interference path (interference weight: 0)
- E. Interference path (interference weight: 0.6)
- F. Interference path (interference weight: 0.2)
- G. Interference path (interference weight: 0.4)

Cluster	Type	Sensitivity (dBm)
3		-135.4475
1		-156.5196
2		-158.5863
4		-158.5863
5		-166.6907
7		-166.6907
6		-168.8460







frequency reuse: 19

Resulting Interference levels by using and without using interference reducing pilots for BSs

IR Pilot

No. Cluster	Type	Sensitivity (dBm)	Interference weight
1		-156.5196	0
2		-158.5863	0.5
4		-158.5863	0.4
5		-166.6907	0.2
6		-168.8460	0.6
7		-166.6907	0.5

Common Pilot

No. Cluster	No. BS	Sensitivity (dBm)	Interference weight
1		-156.5196	1
2		-158.5863	1
4		-158.5863	1
5		-166.6907	1
6		-168.8460	1
7		-166.6907	1

Pattern	Cluster interference (dBm)
IR Pilot	-158.3135
Common Pilot	-135.3844

Summary

- When we introduced the interference reducing pilots for the various communication links we reduce the interference level by 7.5 dB for 7 base stations with frequency reuse factor 1 and the interference level reduce by 23 dB for 19 base stations when the use factor is 19.

Proposed Text for SDD (1/4)

11.X DL/UL control

11.X.1 Interference management

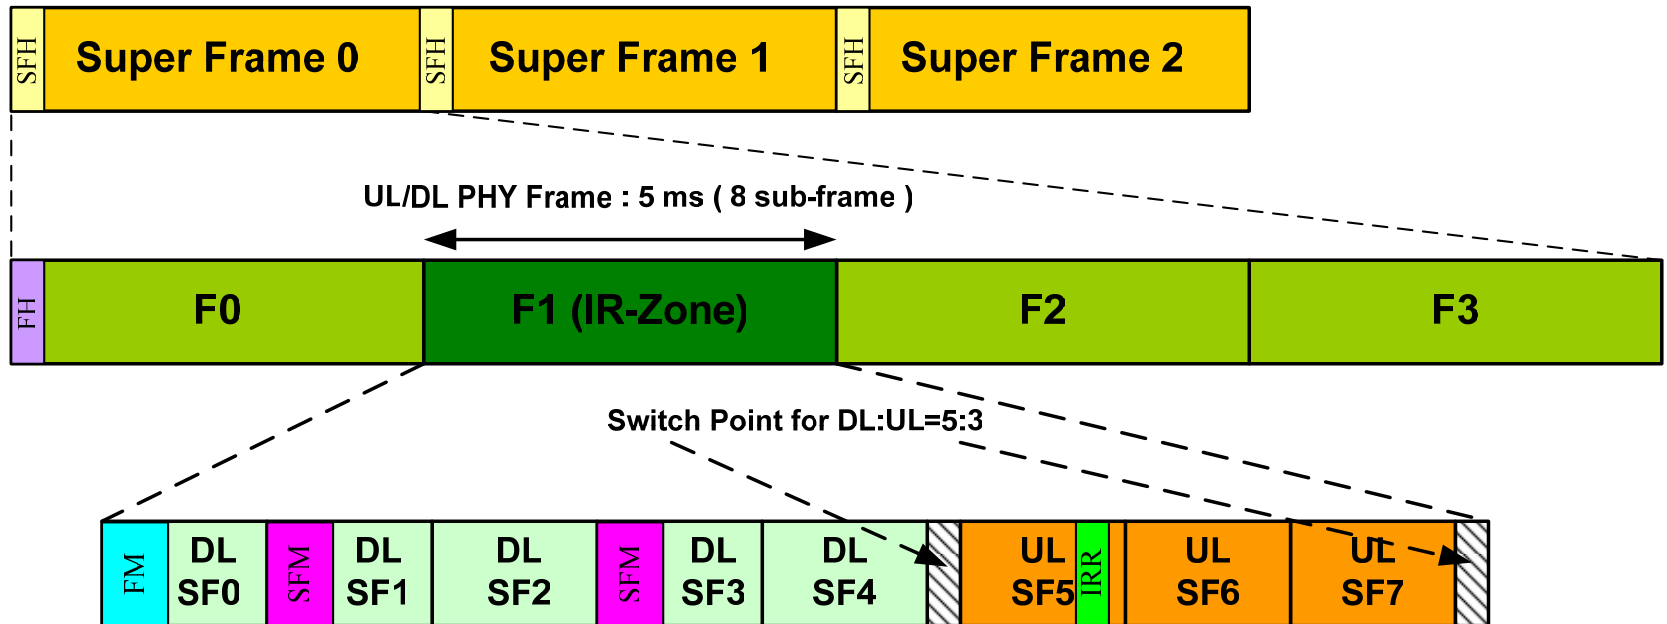
1) Frame structure for the control channel

Insert the following statements in the text

- (1) **SFH (Super Frame Header)**: the SFH is used for the transmission of the information such as the synchronization, frequency reference, cell ID etc
- (2) **FH (Frame Header)**: the FH will identify which frame should activate an IR-Zone (interference reducing zone), and when an IR-Zone is activated then the MS in this zone will receive the interference reducing service.
- (3) **FM (Frame Map)**: This FM is used to designate MSs locations in the sub-frame for those MSs are not in the interference-reducing zone (IR-Zone).
- (4) **SFM (Sub-frame Map)**: the SFM is used to designate which MSs in this IR-Zone need the interference reducing service. The MS designated can be a group of MSs or a single MS. It gives MS the information of the zone location, the orthogonal pilot pattern and it also will provide the relative location information of the UL- Zone.
- (5) **IR-Zone (Interference Reducing Zone)**: this zone is activated by the BS it can be divided into UL and DL IR-zones. The zone's size and location are described in the FH and the SFM, it also serves those MSs that need interference reducing services.
- (6) **UL-IRR (Uplink-interference Reducing Request)**: the MS will send an interference reducing request in this frame and the BS will include this MS which sends this request in the IR-Zone in the next DL frame.


Proposed Text for SDD (2/4)

- Control channel structure for TDD



Proposed Text for SDD (3/4)

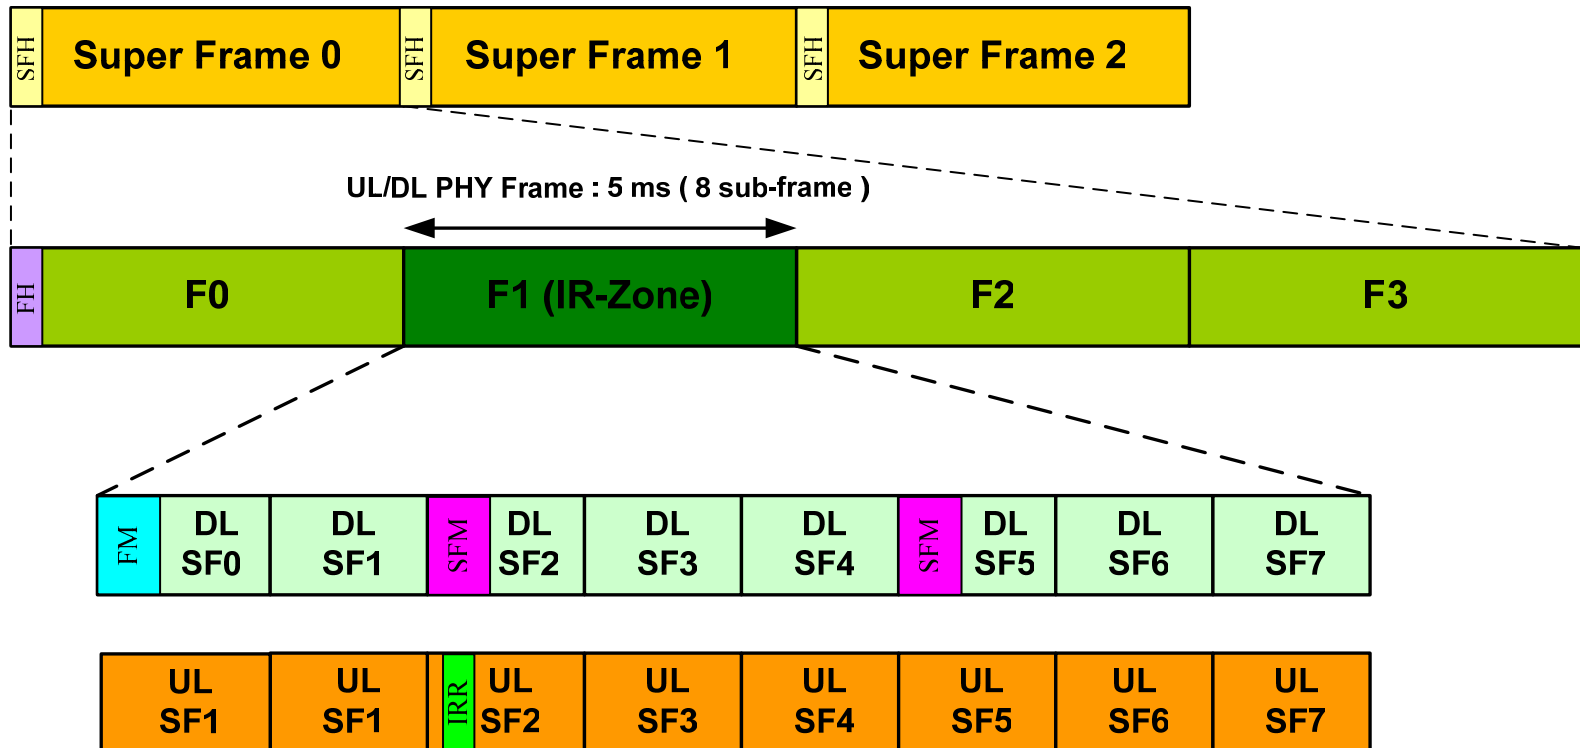- Control channel structure for FDD



Proposed Text for SDD (4/4)

2) Interference Reducing Pilot Patterns

With properly designed pilot patterns that they have power interference weight between two any pairs of pilots we can have the system interference level lower than the system that has the same weight assigned for all pilots.

Reference(1/2)

- [1] Zexian Li, Andrea Bacioccola Nokia Shashikant Maheshwari, Adrian Boariu, Yousuf Saifullah, Xin Qi, Xiaoyi Wang Nokia Siemens Networks , “Proposed Text from IEEE C80216m-08/224r2 for Downlink Control Structure in P802.16m SDD ” IEEE 802.16 Broadband Wireless Access Working Group, C80216m-08_017r1
- [2] Sophie Vrzic, Mo-Han Fong, Robert Novak, Jun Yuan, Dongsheng Yu, Sang-Youb Kim, Anna Tee, Kathiravetpillai Sivanesan,Nortel Networks, “Proposed SDD Text on Downlink Control Structure “ IEEE 802.16 Broadband Wireless Access Working Group, C80216mDL_ctrl-08_023
- [3] Kang Rui, Liu Ying, Guan Yanfeng, Lu ZhaohuaZTE Corporation ,” Proposed Text from IEEE C80216m-08/224r2 for Downlink Control Structure in P802.16m SDD ” IEEE 802.16 Broadband Wireless Access Working Group, C80216mDL_ctrl-08_024
- [4] Fan Wang, Bishwarup Mondal, Mark Cudak, Amitava Ghosh, Tim Thomas, Fred Vook ,” Proposal on SDD Text on Downlink Control Structure ” IEEE 802.16 Broadband Wireless Access Working Group, C80216mDL_ctrl-08_025

Reference(2/2)

- [5] Sun Changyin, Wangwenhuan, Liumin ZTE Corporation, Yang Lian Huawei Technologies, "Proposed SDD Text of DL Control Structure based on IEEE C80216m-08/225r3" IEEE 802.16 Broadband Wireless Access Working Group, C80216m-08_027
- [6] Youngsoo Yuk, Heejeong Cho, Jeongki Kim, Kiseon Ryu, Ronny (Yong-Ho) Kim LG Electronics, "Proposed Text for 16m SDD on Downlink Control Structure" IEEE 802.16 Broadband Wireless Access Working Group, C80216m-08_032r1