

The Draft IEEE 802.16m System Description Document

Table of Content

1 Scope 3

2 References 4

3 Definition, Symbols, Abbreviation 5

4 Overall Network Architecture 6

5 IEEE 802.16m System Reference Model 9

6 IEEE 802.16m Top Level System State Diagrams 10

7 Frequency Bands 11

8 IEEE 802.16m Air-Interface Protocol Structure 12

8.1 The IEEE 802.16m Protocol Structure 12

8.1.1 The IEEE 802.16m MS/BS Data Plane Processing Flow 13

8.1.2 The IEEE 802.16m MS/BS Control Plane Processing Flow 14

8.1.3 Basic Protocol architecture for Multicarrier Support 14

9 Convergence Sub-Layer 16

10 Medium Access Control Sub-Layer 16

11 Physical Layer 16

11.1 Duplex Schemes 16

11.2 Downlink and Uplink Multiple Access Schemes 16

11.3 OFDMA Parameters 16

11.4 Frame structure 17

11.4.1 Basic Frame structure 17

11.4.2 Frame Structure Supporting Legacy Frames 20

11.4.3 Frame Structure Supporting Legacy Frames with a Wider Channel for 802.16m 21

11.4.4 The Concept of Time Zones 21

11.4.5 Relay Support in Frame Structure 22

11.4.6 Coexistence Supports in Frame Structure 22

12 Security 23

13 Inter-Radio Access Technology Functions 23

14 Support for Location Based Services 23

1 **15 Support for Enhanced Multicast Broadcast Service 23**

2 **16 Support for multi-hop relay 23**

3 **17 Solutions for Co-deployment and Co-existence 23**

4 **18 Support for Self-organization 23**

5 **19 Support for Multicarrier 23**

6 **20 RF Requirements 23**

7 **Appendix 1 IEEE 802.16e Protocol Structure 23**

8 *A1.1 The IEEE 802.16e MS/BS Data Plane Processing Flow 25*

9 *A1.2 The IEEE 802.16e MS/BS Control Plane Processing Flow 26*

10 **Appendix 2. Data Plane and Control Plane Access Latencies 27**

11 *A2.1 Data Plane Access Latency 27*

12 *A2.2 Control Plane Access Latency 28*

13

1

2 **1 Scope**

3 The 802.16m amendment shall be developed in accordance with the P802.16 project authorization request
4 (PAR), as approved on 6 December 2006 [1], and with the Five Criteria Statement in IEEE 802.16-06/055r3
5 [2]. According to the PAR, the standard shall be developed as an amendment to IEEE Std 802.16 [3][4]. The
6 resulting standard shall fit within the following scope:

7
8 *This standard amends the IEEE 802.16 WirelessMAN-OFDMA specification to provide an advanced air*
9 *interface for operation in licensed bands. It meets the cellular layer requirements of IMT-Advanced next*
10 *generation mobile networks. This amendment provides continuing support for legacy WirelessMAN-*
11 *OFDMA equipment.*

12
13 And the standard will address the following purpose:

14
15 *The purpose of this standard is to provide performance improvements necessary to support future*
16 *advanced services and applications, such as those described by the ITU in Report ITU-R M.2072.*

17
18 The standard is intended to be a candidate for consideration in the IMT-Advanced evaluation process being
19 conducted by the International Telecommunications Union– Radio Communications Sector (ITU-R) [5][6][7].
20 This document represents the system description document for the 802.16m amendment. It describes the system
21 level description of the 802.16m system based on the SRD developed by the IEEE 802.16 TGM[8]. All content
22 included in any draft of the 802.16m amendment shall be in accordance with the system level description in this
23 document as well as in compliance with the requirements in the SRD. This document, however, shall be
24 maintained and may evolve. The system described herein is defined to ensure competitiveness of the evolved air
25 interface with respect to other mobile broadband radio access technologies as well as to ensure support and
26 satisfactory performance for emerging services and applications.

2 References

- 1 [1] IEEE 802.16m PAR, December 2006, <http://standards.ieee.org/board/nes/projects/802-16m.pdf>
- 2
- 3 [2] IEEE 802.16 WG, "Five Criteria Statement for P802.16m PAR Proposal," IEEE 802.16-06/55r3,
4 November 2006, http://ieee802.org/16/docs/06/80216-06_055r3.pdf
- 5
- 6 [3] IEEE Std 802.16-2004: Part 16: IEEE Standard for Local and metropolitan area networks: Air Interface
7 for Fixed Broadband Wireless Access Systems, June 2004
- 8 [4] IEEE Std. 802.16e-2005, IEEE Standard for Local and metropolitan area networks, Part 16: Air
9 Interface for Fixed and Mobile Broadband Wireless Access Systems, Amendment 2: Physical and
10 Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands, and
11 IEEE Std. 802.16-2004/Cor1-2005, Corrigendum 1, December 2005
- 12 [5] Recommendation ITU-R M.1645: Framework and overall objectives of the future development of IMT-
13 2000 and systems beyond IMT-2000, January 2003
- 14 [6] ITU-R Document 8F/TEMP/568: Guidelines for evaluation of radio interface technologies for IMT-
15 Advanced, May 2007
- 16 [7] ITU-R Document 8F/TEMP/574: Requirements related to technical system performance for IMT-
17 Advanced radio interface(s) [IMT.TECH] , May 2007
- 18 [8] IEEE 802.16m System Requirements, IEEE 802.16m-07/002r4
- 19 [9] The WiMAX Forum Network Architecture Stage 2 - 3: Release 1, Version 1.2
20 [http://www.wimaxforum.org/technology/documents/WiMAX_End-to-](http://www.wimaxforum.org/technology/documents/WiMAX_End-to-End_Network_Systems_Architecture_Stage_2-3_Release_1.1.2.zip)
21 [End_Network_Systems_Architecture_Stage_2-3_Release_1.1.2.zip](http://www.wimaxforum.org/technology/documents/WiMAX_End-to-End_Network_Systems_Architecture_Stage_2-3_Release_1.1.2.zip)

1 **3 Definition, Symbols, Abbreviation**

4 Overall Network Architecture

<Editor's Note: This section will describe the overall network architecture applicable to 802.16m.>

The Network Reference Model (NRM) is a logical representation of the network architecture. The NRM identifies functional entities and reference points over which interoperability is achieved between functional entities. The following Figure 1 illustrates the NRM, consisting of the following functional entities: Mobile Station (MS), Access Service Network (ASN), and Connectivity Service Network (CSN). The existing network reference model is defined in WiMAX Network Architecture [9].

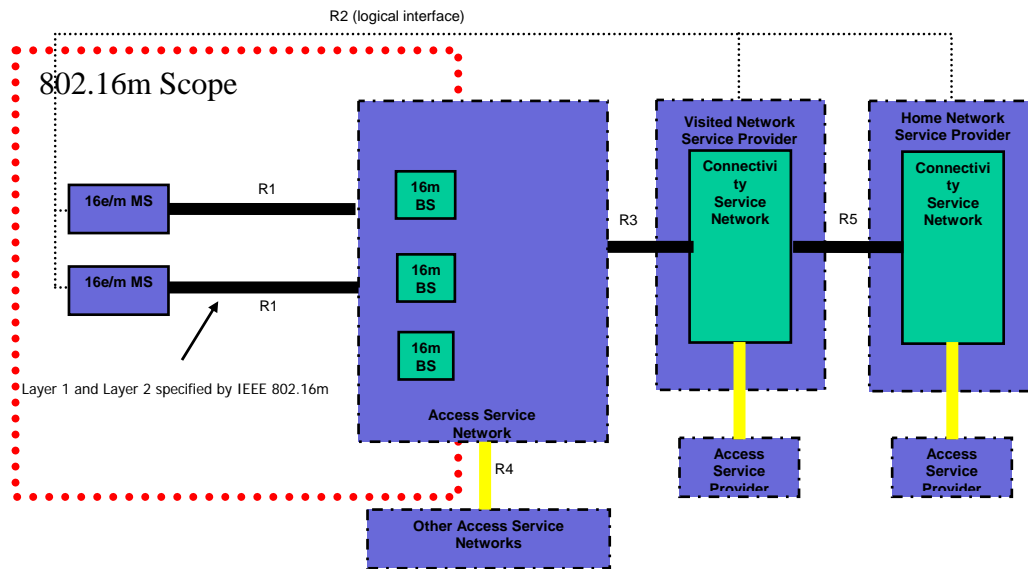


Figure 1 Example of overall network architecture

The ASN is defined as a complete set of network functions needed to provide radio access to an IEEE 802.16e/m subscriber. The ASN provides at least the following functions:

- IEEE 802.16e/m Layer-1 (L1) and Layer-2 (L2) connectivity with IEEE 802.16e/m MS
- Transfer of AAA messages to IEEE 802.16e/m subscriber's Home Network Service Provider (H-NSP) for authentication, authorization and session accounting for subscriber sessions
- Network discovery and selection of the IEEE 802.16e/m subscriber's preferred NSP
- Relay functionality for establishing Layer-3 (L3) connectivity with an IEEE 802.16e/m MS (i.e. IP address allocation)
- Radio Resource Management

In addition to the above functions, for a portable and mobile environment, an ASN further supports the following functions:

- ASN anchored mobility
- CSN anchored mobility
- Paging

- 1 • ASN-CSN tunneling


2 The ASN comprises network elements such as one or more Base Station(s), and one or more ASN Gateway(s).
3 An ASN may be shared by more than one CSN. The CSN is defined as a set of network functions that provide
4 IP connectivity services to the IEEE 802.16e/m subscriber(s). A CSN may provide the following functions:

- 5 • MS IP address and endpoint parameter allocation for user sessions
6 • Internet access
7 • AAA proxy or server
8 • Policy and Admission Control based on user subscription profiles
9 • ASN-CSN tunneling support,
10 • IEEE 802.16e/m subscriber billing and inter-operator settlement
11 • Inter-CSN tunneling for roaming
12 • Inter-ASN mobility

13 The IEEE 802.16e/m services such as location based services, connectivity for peer-to-peer services,
14 provisioning, authorization and/or connectivity to IP multimedia services and facilities to support lawful
15 intercept services such as those compliant with Communications Assistance Law Enforcement Act (CALEA)
16 procedures.

17 CSN may further comprise network elements such as routers, AAA proxy/servers, user databases, Interworking
18 gateway MSs. A CSN may be deployed as part of a greenfield IEEE 802.16e/m NSP or as part of an incumbent
19 IEEE 802.16e NSP.

20 The Relay Stations (RSs) may be deployed to provide improved coverage and/or capacity (see **Error!**
21 **Reference source not found.**Figure 2**Error! Reference source not found.**). When RSs are present,
22 communications between the BS and the MS can occur directly or via relay.
23

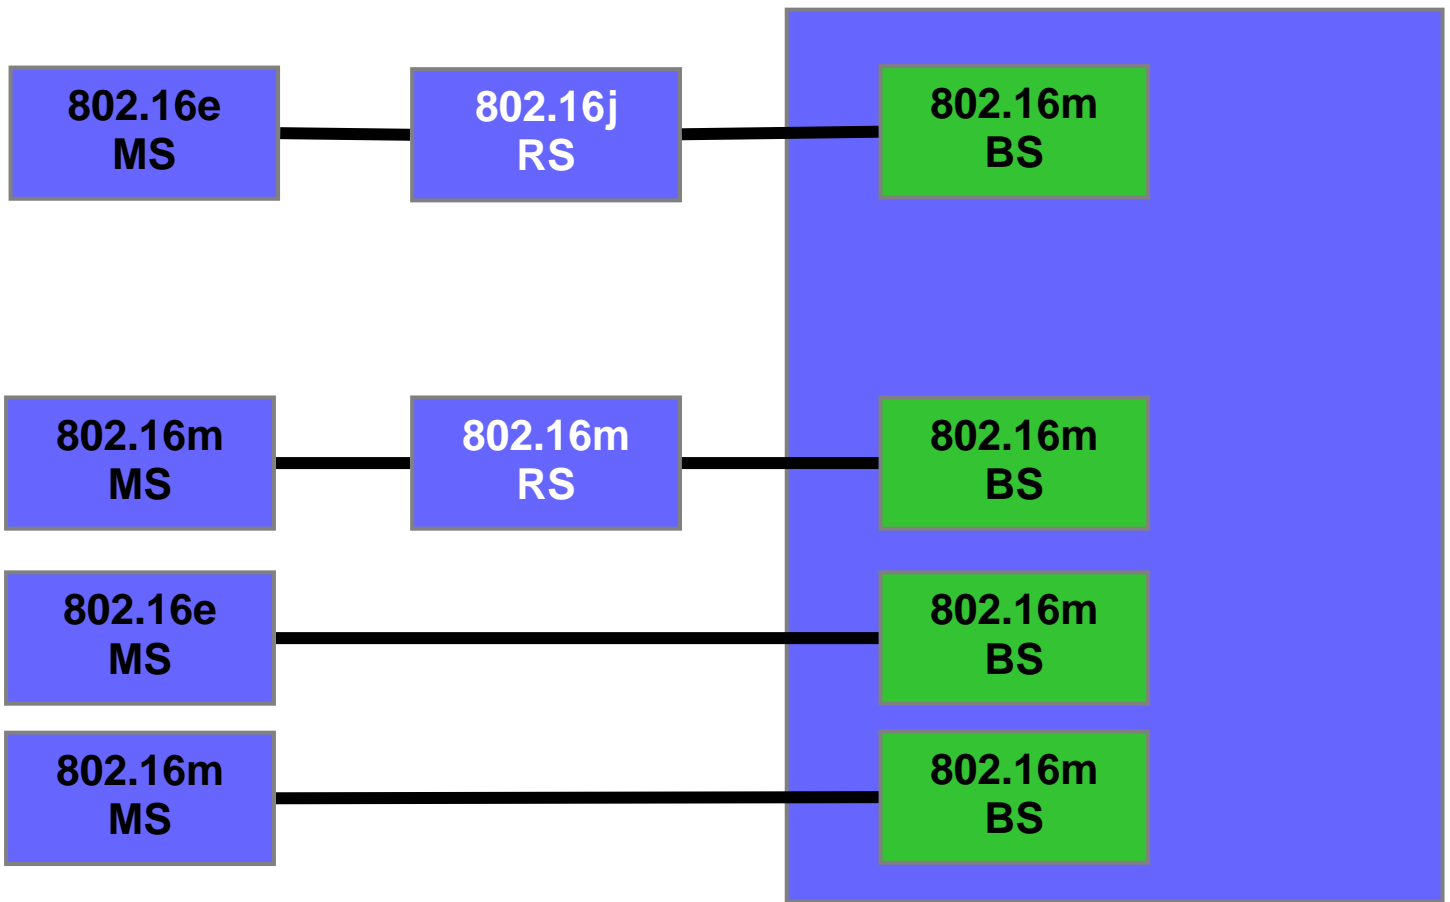

1
2
3
4
5
6

Figure 2 The Relay Station in overall network architecture

A 16m BS that is capable of supporting a 16j RS, shall communicate with the 16j RS in the "legacy zone". The 16m BS is not required to provide 16j protocol support in the "16m zone". The design of 16m relay protocols should be based on the design of 16j wherever possible, although 16m relay protocols used in the "16m zone" may be different from 16j protocols used in the "legacy zone".

5 IEEE 802.16m System Reference Model

<Editor's Note: This section describes system reference model in for those functions introduced in the 802.16m air interface>

As shown in the following Figure 3, the proposed reference model for IEEE 802.16m is very similar to that of IEEE 802.16e with the exception of soft classification of MAC common part sub-layer (i.e., no SAP is required between the two classes of functions) into resource control and management functions and medium access control functions.

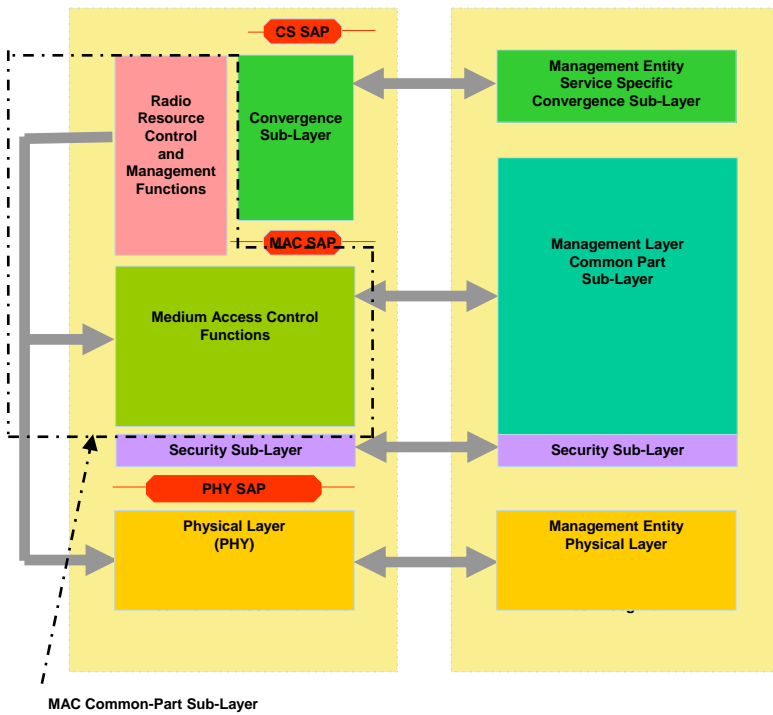


Figure 3 System Reference Model

1 **6 IEEE 802.16m Top Level System State Diagrams**

2 <Editor's Note: To capture only the top level states of the mobile stations, base stations. Detailed feature
3 specific state diagrams will be captured elsewhere in the respective sections.>

1 **7 Frequency Bands**

2 <Editor's Note: This section will describe the frequency bands that are applicable to the IEEE 802.16m system>

8 IEEE 802.16m Air-Interface Protocol Structure

8.1 The IEEE 802.16m Protocol Structure

The IEEE 802.16m follows the MAC architecture of current IEEE 802.16e and includes additional functional blocks for 802.16m specific features (see Figure 4). The following additional functional blocks are included:

- Routing
- Self Organization
- Multi-Carrier
- Multi-Radio Coexistence
- Data forwarding
- Interference Management
- Inter-BS coordination

Self Organization block performs functions to support self configuration and self optimization mechanisms. The functions include procedures to request MSs to report measurements for self configuration and self optimization and receive the measurements from the MSs.

Multi-carrier (MC) block enables a common MAC entity to control a PHY spanning over multiple frequency channels. The channels may be of different bandwidths (e.g. 5, 10 and 20 MHz), be non-contiguous or belong to different frequency bands. The channels may be of the same or different duplexing modes, e.g. FDD, TDD, or a mix of bidirectional and broadcast only carriers.


Multi-Radio Coexistence block performs functions to support concurrent operations of 802.16m and non-802.16m radios collocated on the same mobile station.

Interference Management block performs functions to manage the inter-cell/sector interference. The operations may include:

- MAC layer operation
 - Interference measurement/assessment report sent via MAC signaling
 - Interference mitigation by scheduling and flexible frequency reuse
- PHY layer operation
 - Transmit power control
 - Interference randomization
 - Interference cancellation
 - Interference measurement
 - Tx beamforming/precoding

Mobility Management block supports functions related to Inter-RAT handover. It handles the Inter-RAT Network topology acquisition which includes the advertisement and measurement, and also decides whether MS performs Inter-RAT handover operation.

1

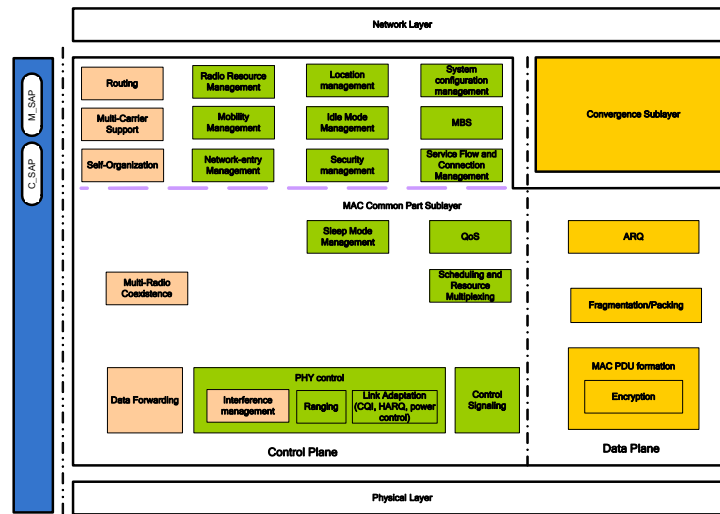

2

3

4

Figure 4 The IEEE 802.16m Protocol Structure

5

8.1.1 The IEEE 802.16m MS/BS Data Plane Processing Flow

6

7

8

9

10


11

12

13

The following Figure 5 shows the user traffic data flow and processing at the BS and the MS. The red arrows show the user traffic data flow from the network layer to the physical layer and vice versa. On the transmit side, a network layer packet is processed by the convergence sublayer, the ARQ function (if present), the fragmentation/packing function and the MAC PDU formation function, to form MAC PDU(s) to be sent to the physical layer. On the receive side, a physical layer SDU is processed by MAC PDU formation function, the fragmentation/packet function, the ARQ function (if present) and the convergence sublayer function, to form the network layer packets. The black arrows show the control primitives among the MAC CPS functions and between the MAC CPS and PHY that are related to the processing of user traffic data.

14

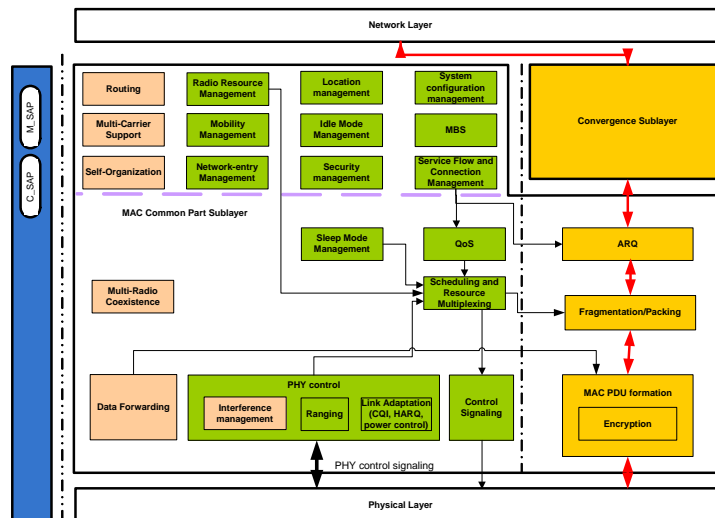

15

16

Figure 5 The IEEE 802.16m MS/BS Data Plane Processing Flow

8.1.2 The IEEE 802.16m MS/BS Control Plane Processing Flow

The following figure shows the MAC CPS control plane signaling flow and processing at the BS and the MS. On the transmit side, the blue arrows show the flow of control plane signaling from the control plane functions to the data plane functions and the processing of the control plane signaling by the data plane functions to form the corresponding MAC signaling (e.g. MAC management messages, MAC header/sub-header) to be transmitted over the air. On the receive side, the black arrows show the processing of the received over-the-air MAC signaling by the data plane functions and the reception of the corresponding control plane signaling by the control plane functions. The black arrows show the control primitives among the MAC CPS functions and between the MAC CPS and PHY that are related to the processing of control plane signaling.

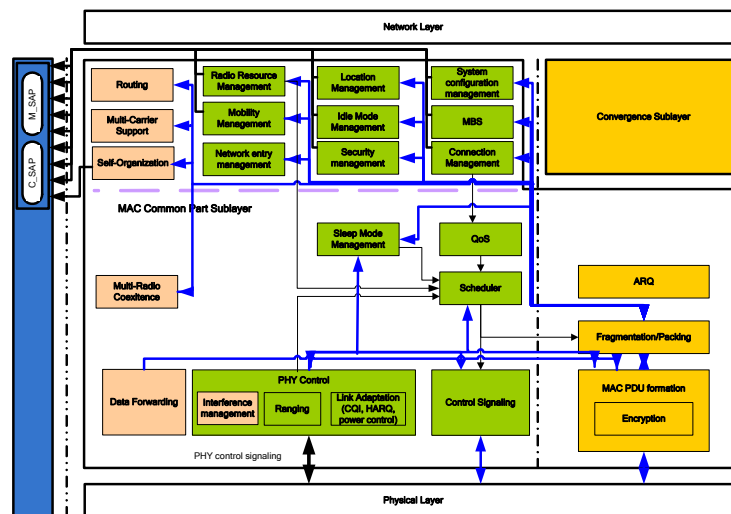


Figure 6 The IEEE 802.16m MS/BS Control Plane Processing Flow

8.1.3 Basic Protocol architecture for Multicarrier Support

Generic protocol architecture to support multicarrier system is illustrated in Figure 7. A common MAC entity may control a PHY spanning over multiple frequency channels. Some MAC messages sent on one carrier may also apply to other carriers. The channels may be of different bandwidths (e.g. 5, 10 and 20 MHz), be non-contiguous or belong to different frequency bands. The channels may be of different duplexing modes, e.g. FDD, TDD, or a mix of bidirectional and broadcast only carriers.

The multicarrier functionality may similarly be applied to multiple groups of subchannels within the frequency channels.

The MAC entity may support simultaneous presence of MSs with different capabilities, such as operation over one channel at a time only or aggregation across channels, operation over contiguous or non-contiguous channels.

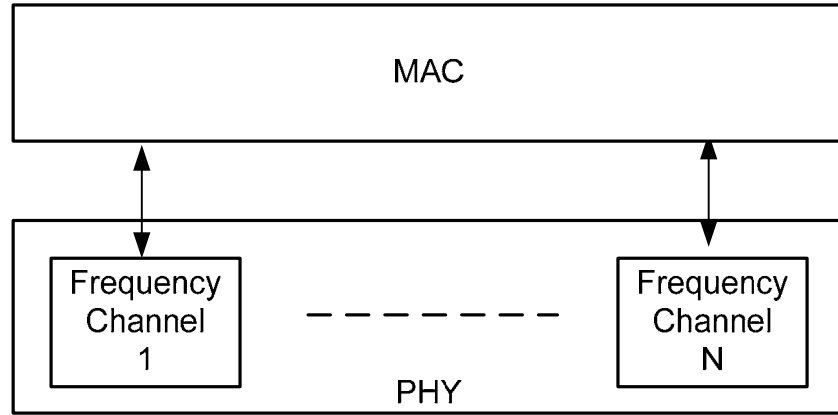


Figure 7 Generic protocol architecture to support multicarrier system

9 Convergence Sub-Layer

10 Medium Access Control Sub-Layer

11 Physical Layer

11.1 Duplex Schemes

IEEE 802.16m supports TDD and FDD duplex schemes, including H-FDD MS operation, in accordance with the IEEE 802.16m system requirements document [8]. Unless otherwise specified, the frame structure attributes and baseband processing are common for all duplex schemes.

11.2 Downlink and Uplink Multiple Access Schemes

IEEE 802.16m uses OFDMA as the multiple access scheme in the downlink. [Determination of the UL multiple access method is pending the output of the Uplink Access Techniques Rapporteur Group and further action by 802.16m]

11.3 OFDMA Parameters

The OFDMA parameters for the IEEE 802.16m are specified as follows:

Nominal Channel Bandwidth (MHz)		5	7	8.75	10	20
Over-sampling Factor		28/25	8/7	8/7	28/25	28/25
Sampling Frequency (MHz)		5.6	8	10	11.2	22.4
FFT Size		512	1024	1024	1024	2048
Sub-Carrier Spacing (kHz)		10.94	7.81	9.77	10.94	10.94
Tu (μ s)		91.4	128	102.4	91.4	91.4
Cyclic Prefix (CP)	Ts (μ s)	Number of OFDM Symbols per Frame				Idle Time (μ s)
Tg=1/8 Tu	91.4 + 11.42=102.82 (for 5, 10, 20 MHz)	48 (for 5, 10, 20 MHz)				62.86
	128+16=144 (for 7 MHz)	34 (for 7 MHz)				104
	102.4+12.8=115.2 (for 8.75 MHz)	43 (for 8.75 MHz)				46.40
Tg=1/16 Tu	91.4 + 5.71 = 97.11 (for 5, 10, 20 MHz)	51 (for 5, 10, 20 MHz)				47.39

Table 1 OFDMA parameters for IEEE 802.16m

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27

11.4 Frame structure

11.4.1 Basic Frame structure

The IEEE 802.16m basic frame structure is illustrated in Figure 8. Each 20 ms super-frame is divided into four equally-sized 5ms radio frames. When using the same OFDMA parameters as the reference system with the channel size of 5 MHz, 10 MHz, or 20 MHz, each 5 ms radio frame further consists of eight sub-frames. Each sub-frame can be assigned for either downlink or uplink transmission depending on the duplexing scheme. There are two types of sub-frames: 1) the regular sub-frames which consist of six OFDMA symbols and 2) the irregular sub-frames that consist of five or less OFDMA symbols.

The basic frame structure is applied to FDD and TDD duplexing schemes, including H-FDD MS operation. The number of switching points in each radio frame in TDD systems is between two to four, where a switching point is defined as a change of directionality, i.e., from DL to UL or from UL to DL.

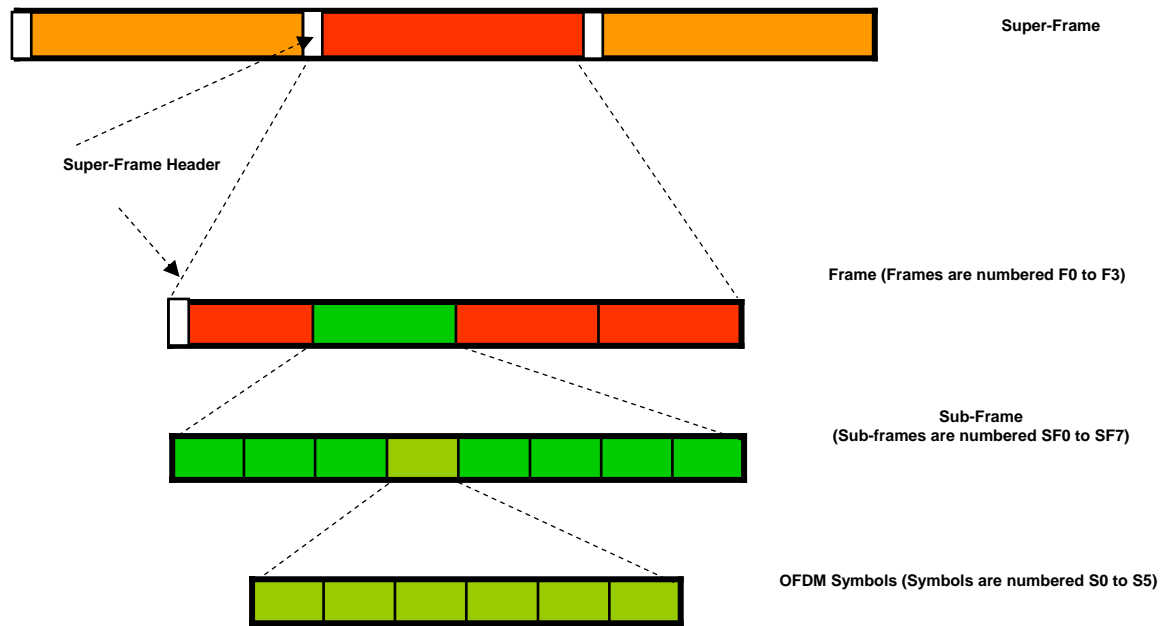


Figure 8 Basic frame structure

Figure 9 illustrates an example TDD frame structure with DL to UL ratio of 5:3. Assuming OFDMA symbol duration of 102.82 us and a CP length of 1/8 Tu, the length of regular and irregular sub-frames are 0.617 ms and 0.514 ms, respectively. Other numerologies may result in different number of sub-frames per frame and symbols within the sub-frames. Figure 10 shows the frame structure in FDD mode.

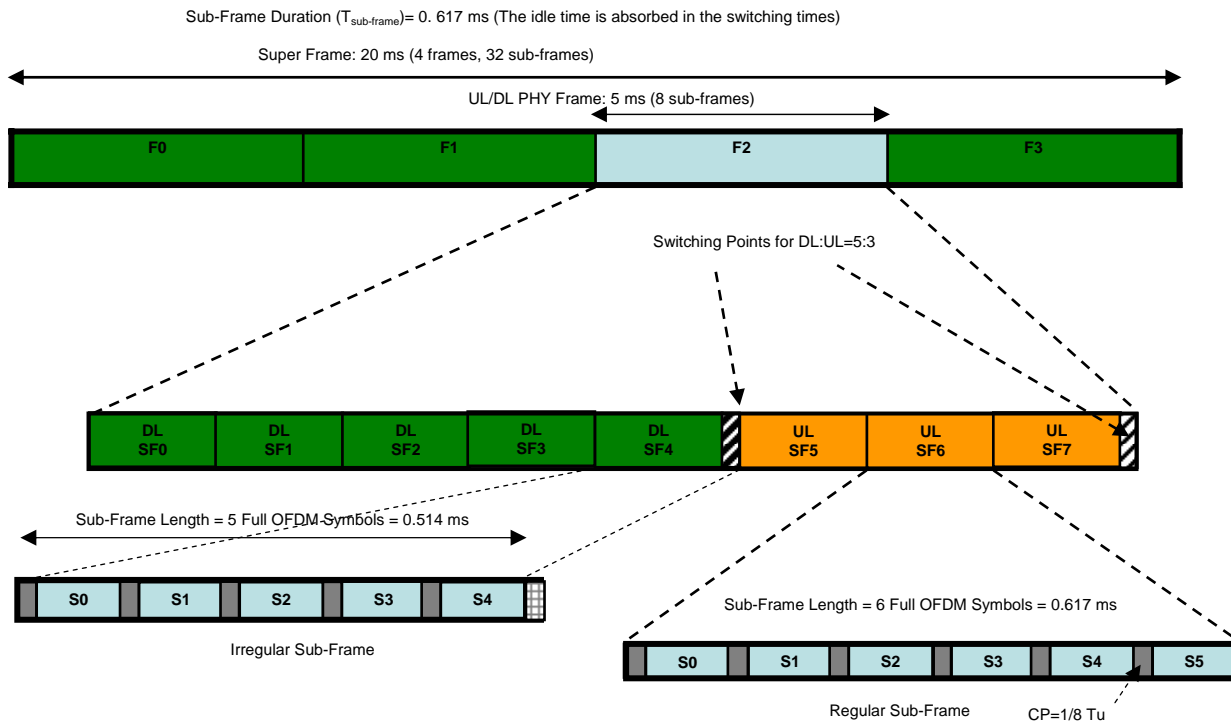


Figure 9 Regular and irregular sub-frames in TDD duplex scheme (CP=1/8 T_u)

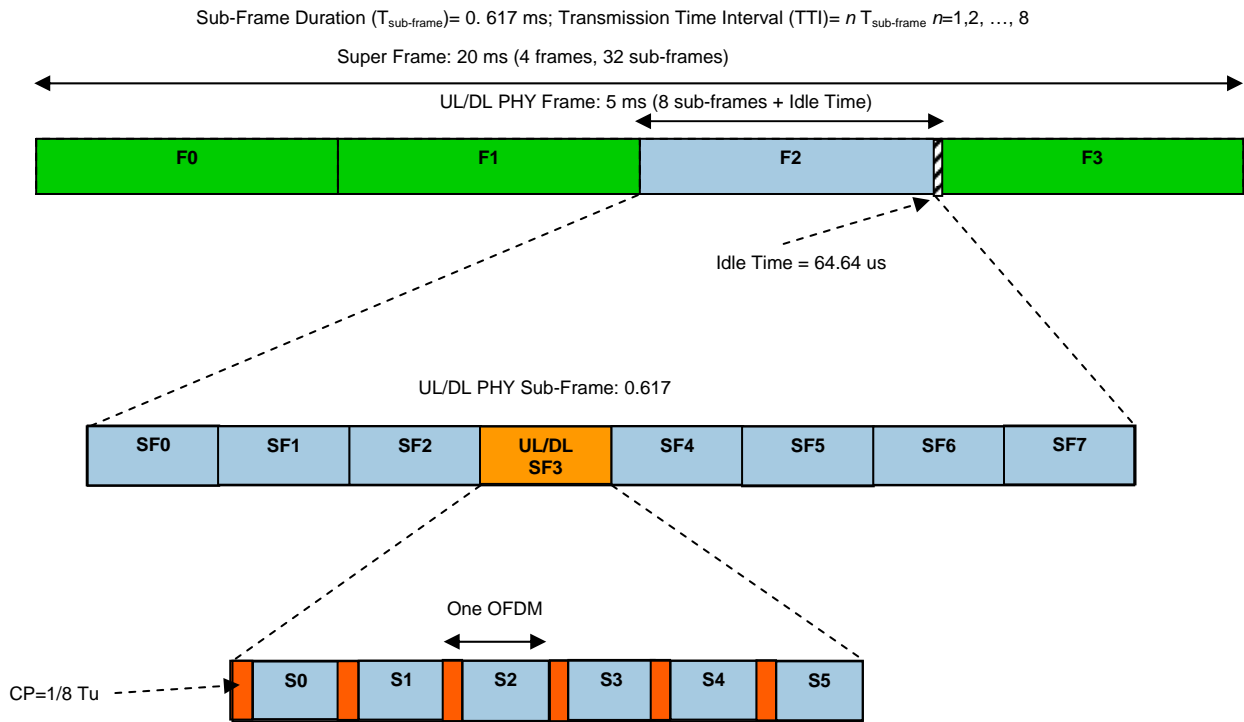


Figure 10 Frame structure in FDD duplex scheme (regular sub-frames) (CP=1/8 T_u)

1
2
3

4
5
6
7
8

1 The H-FDD frame structure from the point of view of the mobile station is similar to the TDD frame structure;
2 however, the DL and UL transmissions occur in two separate frequency bands. The transmission gaps between
3 DL and UL (and vice versa) are required to allow switching the TX and RX circuitry.

4
5 To ensure efficient use of the radio resources when operating with H-FDD mobile stations in an FDD network,
6 the mobile stations within the coverage area of the BS should be grouped into two complementary groups
7 whose downlink and uplink transmissions are not concurrent (an example is shown in Figure 11). The frame
8 structure from the point of view of the BS and the full FDD mobile stations is not affected by the H-FDD
9 characteristics of some mobile stations and is identical to the FDD frame structure. However, the frame
10 structure from the point of view of the H-FDD mobile stations is different and DL and UL transmissions do not
11 occur simultaneously. Nevertheless the downlink and uplink transmission frequencies are different. Since the
12 beginning of the DL radio frame and super-frame may contain broadcast information (i.e., synchronization
13 channel or preamble as well as super-frame header containing the broadcast channel); this is marked in red in
14 Figure 11.4-3, the H-FDD mobile station groups should not have any uplink transmissions scheduled in the first
15 sub-frame of each frame. The complementary grouping and scheduling scheme described here can ensure
16 efficient utilization of the radio resources. Also note that the H-FDD mobile stations require a switching time
17 between any DL to UL or UL to DL transition.

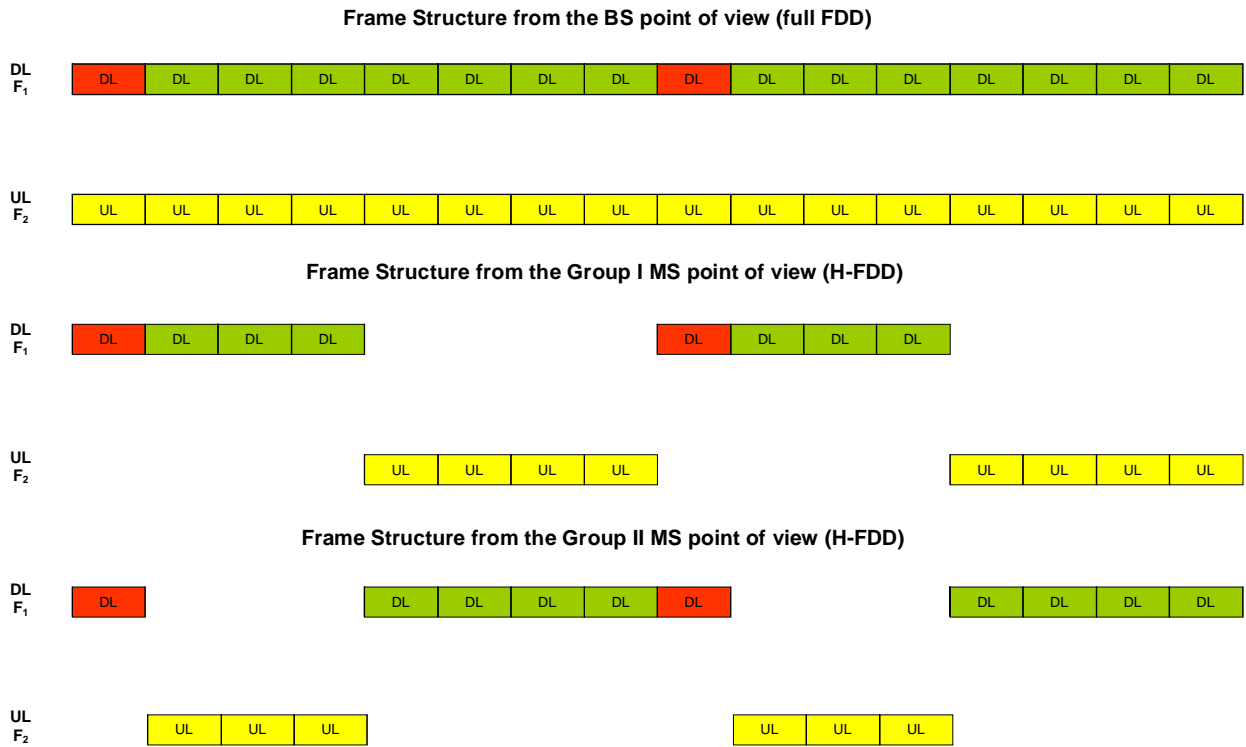


Figure 11 Example of Complementary grouping and scheduling of H-FDD mobile stations

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18

11.4.1.1 Super-frame Header

As shown in Figure 8, each super-frame shall begin with a DL sub frame that contains a super-frame header.

11.4.1.2 Transmission Time Interval


The transmission time interval is the minimum transmission time of physical layer data units over the radio air-interface and is equal to an integer number of sub-frames (default one sub-frame).

11.4.2 Frame Structure Supporting Legacy Frames

The legacy and 802.16m frames are offset by a fixed number of sub-frames to accommodate new features such as new synchronization channel (preamble), broadcast channel (system configuration information), and control channels, as shown in Figure 12. The FRAME_OFFSET shown in Figure 12 is for illustration. It is an offset between the start of the legacy frame and the start of the new frame. In the case of coexistence with legacy systems, two switching points may be selected in each TDD radio frame.

For UL transmissions both TDM and FDM approaches should be supported for multiplexing of legacy and 16m

1 mobiles.
2

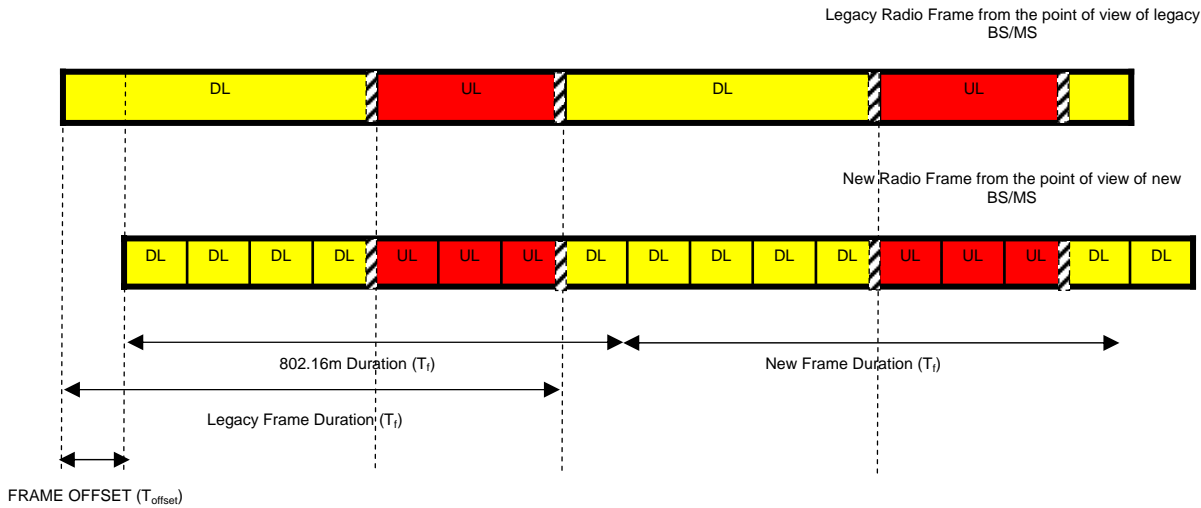

3
4 Figure 12 Relative position of the new and legacy radio frames (example TDD duplex scheme) → proposal-1
5
6

7 **11.4.3 Frame Structure Supporting Legacy Frames with a Wider Channel for 802.16m**
8

9 **11.4.4 The Concept of Time Zones**
10

11 The concept of time zones is introduced that is equally applied to TDD and FDD systems. The new and legacy
12 time zones are time-multiplexed (TDM) across time domain for the downlink. For UL transmissions both TDM
13 and FDM approaches should be supported for multiplexing of legacy and new terminals. Note that DL/UL
14 traffic for the new MS can be scheduled in both zones whereas the DL/UL traffic for the legacy MS can only be
15 scheduled in the legacy zones.

16
17 In the absence of any legacy system, the legacy zones will disappear and the entire frame will be allocated to
18 the new zones and thereby new systems.

19
20
21 **11.4.4.1 Time Zones in TDD**
22

23 As was mentioned earlier, the concept of time zones applies to TDD mode (see Figure 13), as well. The
24 following constraints apply:

25
26 In a mixed deployment, the allocation of time zones in the TDD duplex mode shall be as shown in Figure 13.
27 The duration of the zones may vary. Every frame shall start with a preamble and the MAP followed by legacy
28 DL zone since legacy terminals/relays expect 802.16e zones in this region. In the case of coexistence, the UL
29 portion shall start with legacy UL zone since legacy BS/terminals/relays expect 802.16e UL control information
30 be sent in this region. In a green-field deployment, the legacy zones can be removed.

- 1 Switching points should be synchronized across network to reduce inter-cell interference.
- 2 The switching points would require use of idle symbols to accommodate the gaps. In case of TDD operation
- 3 with the generic frame structure, the last symbol in the slot immediately preceding a downlink-to-uplink/uplink-
- 4 to-downlink switching point may be reserved for guard time and consequently not transmitted.

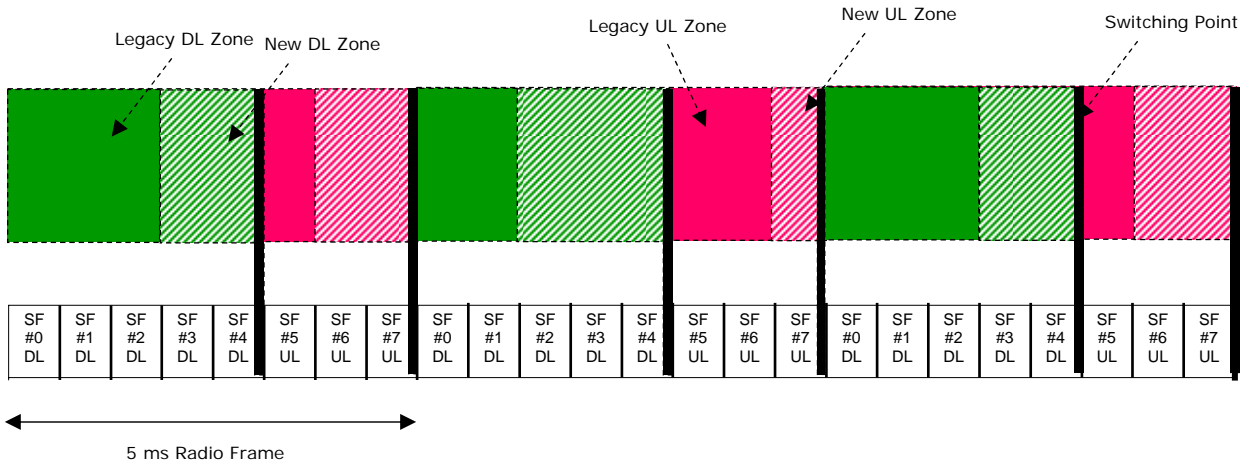


Figure 13 Figure 11.4-5: Time zones in TDD mode

- 5
- 6
- 7
- 8

11.4.5 Relay Support in Frame Structure

9

11.4.6 Coexistence Supports in Frame Structure

10

11

12


13

14

- 1 **12 Security**
- 2 **13 Inter-Radio Access Technology Functions**
- 3 **14 Support for Location Based Services**
- 4 **15 Support for Enhanced Multicast Broadcast Service**
- 5 **16 Support for multi-hop relay**
- 6 **17 Solutions for Co-deployment and Co-existence**
- 7 **18 Support for Self-organization**
- 8 **19 Support for Multicarrier**
- 9 **20 RF Requirements**

10 **Appendix 1 IEEE 802.16e Protocol Structure**

11 The following **Error! Reference source not found.** shows the protocol architecture of IEEE 802.16e which
 12 will be used as reference system. The MAC layer is composed of two sub-layers: Convergence Sublayer (CS)
 13 and MAC Common Part Sublayer (MAC CPS).
 14

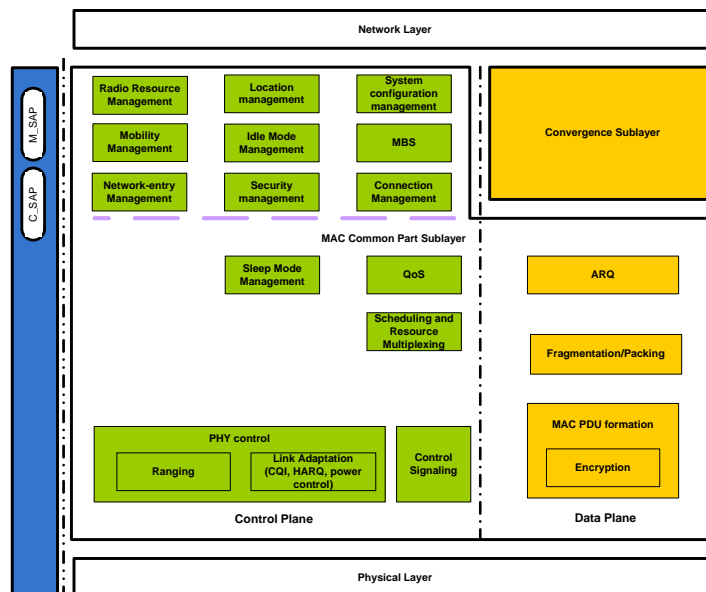

15
16 Figure 14 The IEEE 802.16e protocol architecture
17

18 For convenience, the MAC CPS functions are classified into two groups based on their characteristics. The
 19 upper one is named as resource control and management functions group, and the lower one is named as

1 medium access control functions. Also the control plane functions and data plane functions are also separately
2 classified.

3 The resource control and management functional group includes several functional blocks that are related with
4 radio resource functions such as:

- 5 • Radio Resource Management
- 6 • Mobility Management
- 7 • Network-entry Management
- 8 • Location Management
- 9 • Idle Mode Management
- 10 • Security Management
- 11 • System Configuration Management
- 12 • MBS
- 13 • Connection Management

14 Radio Resource Management block adjusts radio network parameters related to the traffic load, and also
15 includes function of load control (load balancing), admission control and interference control.

16 Mobility Management block handles related to handover procedure. Mobility Management block manages
17 candidate neighbor target BSs based on some criteria, e.g. PHY signaling report, loading, etc. and also decides
18 whether MS performs handover operation.

19 Network-entry Management block is in charge of initialization procedures. Network-entry Management block
20 may generate management messages which needs during initialization procedures, i.e., ranging (this does not
21 mean physical ranging, but ranging message in order to identification, authentication, and CID allocation), basic
22 capability, registration, and so on.

23 Location Management block is in charge of supporting location based service (LBS). Location Management
24 block may generate messages including the LBS information. The Idle Mode Management block manages
25 location update operation during idle mode.

26 Idle Mode Management block controls idle mode operation, and generates the paging advertisement message
27 based on paging message from paging controller in the core network side.

28 Security Management block is in charge of key management for secure communication. Using managed key,
29 traffic encryption/decryption and authentication are performed.

30 System Configuration Management block manages system configuration parameters, and generates broadcast
31 control messages such as downlink/uplink channel descriptor (DCD/UCD).

32 MBS (Multicast and Broadcasting Service) block controls management messages and data associated with
33 broadcasting and/or multicasting service.

34 Connection Management block allocates connection identifiers (CIDs) during initialization/handover/ service
35 flow creation procedures. Connection Management block interacts with convergence sublayer to classify MAC
36 Service Data Unit (MSDU) from upper layer, and maps MSDU onto a particular transport connection.

37 The medium access control functional group includes function blocks which are related with physical layer and
38 link controls such as:

- 1 • PHY Control
- 2 • Control Signaling
- 3 • Sleep Mode Management
- 4 • QoS
- 5 • Scheduling and Resource and Multiplexing
- 6 • ARQ
- 7 • Fragmentation/Packing
- 8 • MAC PDU formation

9 PHY Control block handles PHY signaling such as ranging, measurement/feedback (CQI), and HARQ
10 ACK/NACK. Based on CQI and HARQ ACK/NACK, PHY Control block estimates channel environment of
11 MS, and performs link adaptation via adjusting modulation and coding scheme (MCS) or power level.

12 Control Signaling block generates resource allocation messages such as DL/UL-MAP as well as specific control
13 signaling messages, and also generates other signaling messages not in the form of general MAC messages
14 (e.g., DL frame prefix also known as FCH).

15 Sleep Mode Management block handles sleep mode operation. Sleep Mode Management block may also
16 generate management messages related to sleep operation, and may communicate with Scheduler block in order
17 to operate properly according to sleep period.

18 QoS block handles rate control based on QoS parameters input from Connection Management function for each
19 connection, and scheduler shall operate based on the input from QoS block in order to meet QoS requirement.

20 Scheduling and Resource and Multiplexing block schedules and multiplexes packets based on properties of
21 connections. In order to reflect properties of connections Scheduling and Resource and Multiplexing block
22 receives QoS information from QoS block for each connection.

23 ARQ block handles MAC ARQ function. For ARQ-enabled connections, ARQ block logically splits MAC SDU
24 to ARQ blocks, and numbers to each logical ARQ block. ARQ block may also generate ARQ management
25 messages such as feedback message (ACK/NACK information).

26 Fragmentation/Packing block performs fragmenting or packing MSDUs based on scheduling results from
27 Scheduler block.


28 MAC PDU formation block constructs MAC protocol data unit (PDU) so that BS/MS can transmit user traffic
29 or management messages into PHY channel. MAC PDU formation block may add sub-headers or extended sub-
30 headers. MAC PDU formation block may also add MAC CRC if necessary, and add generic MAC header.

31 ***A1.1 The IEEE 802.16e MS/BS Data Plane Processing Flow***

32 The following figure describes data transmission flow in the 802.16e. On the transmitter side, after a packet
33 arrives from higher layer, Convergence Sublayer classifies a packet according to classification rules, and maps a
34 packet onto a particular transport connection. If a packet is associated with ARQ connection, then ARQ block
35 logically splits a packet into ARQ blocks. After scheduling, a packet may be fragmented or packed, and add
36 sub-header if necessary. A packet including sub-headers may be encrypted if negotiated. MAC PDU formation
37 block adds generic MAC header, then MAC Protocol Data Unit (MPDU) is constructed. Several MPDUs may
38 be concatenated according to the size of the data burst.

39 On the receiver side, after a packet arrives from physical layer, MAC PDU formation block constructs MPDU,

1 and Fragmentation/Packing block defragments/unpacks MPDU to make MSDU. After reconstituted in
 2 Convergence Sublayer, MSDU is transferred to higher layer.

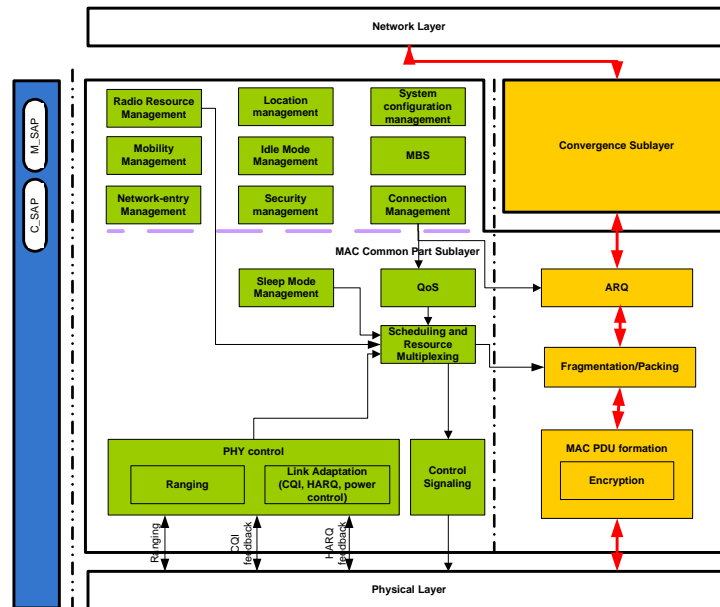

5 Figure 15 The IEEE 802.16e MS/BS Data Plane Processing Flow

6 **A1.2 The IEEE 802.16e MS/BS Control Plane Processing Flow**

7 The following **Error! Reference source not found.** describes the MAC message transmission flow in 802.16e.
 8 Most of the MAC functional block generates its own management messages, and these messages are
 9 transported to Fragmentation/Packing block. Basically the MAC management message does not use ARQ block
 10 (Management messages will be operated in request-and-response manner, that is, if there is no response, sender
 11 retransmits request. Therefore additional ARQ operation is not required). Management message may be
 12 fragmented or packed, and authentication information (e.g., CMAC/HMAC in 802.16e) may be appended to the
 13 management message if necessary. Some of MAC message may be transmitted via Control Signaling block in
 14 the form of control message (e.g., MAP). On the receiver side, most of MAC functional block also receives and
 15 handles MAC management messages from the MAC functional block of the opposite side (MS to BS, BS to
 16 MS).
 17
 18
 19

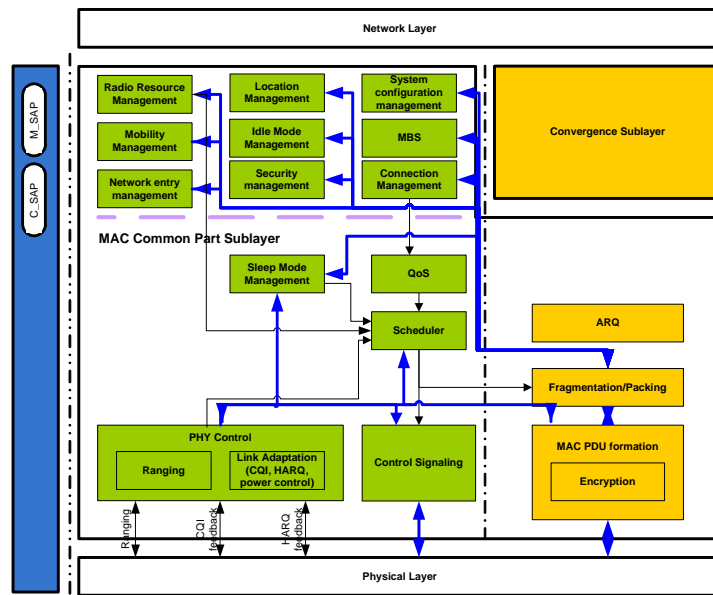


Figure 16 The IEEE 802.16e MS/BS Control Plane Processing Flow

[Editor note: the following text has been generated based on minority opinion and the TBD responses from a large number of members to latency attributes of the frame structure in the Excel Sheet [C802.16m-08/096r10] and the necessity to demonstrate the frame structure compliance with the IEEE 802.16m SRD [8]. The content of the following tables will be updated based on the ultimate decisions that will be made in the group on the frame structure parameters.]

Appendix 2. Data Plane and Control Plane Access Latencies

[In order to justify the choice of parameters for the proposed frame structure, it is imperative to demonstrate that the frame structure and associated parameters satisfy the IEEE 802.16m system requirements. In the following sections, the break down of the data and control planes access latencies is provided for the reference and the IEEE 802.16m systems.

A2.1 Data Plane Access Latency

The break down of the components of data plane access latency is shown in Table 2. The access latency with 30% frame error rate over the airlink is 4.67 ms which is less than 10 ms limit specified by the IEEE 802.16m SRD.

Step	Description	IEEE 802.16e Value	IEEE 802.16m Value
0	MS wakeup time	Implementation Dependent	Implementation Dependent
1	MS Processing Delay	2.5 ms	1.23 ms
2	Frame Alignment	2.5 ms	0.31 ms
3	TTI for UL DATA PACKET (Piggy back scheduling information)	5 ms	0.617 ms
4	H-ARQ Retransmission (FER = 30%)	0.3*20 ms	0.3* 4.3 ms
5	BS Processing Delay	2.5 ms	1.23 ms
6	R6 Transfer delay	T_{R6}	T_{R6}
7	ASN-GW Processing delay	T_{ASN_GW}	T'_{ASN_GW}
Total one way access delay		$18.50 \text{ ms} + T_{ASN_GW} + T_{R6}$	$4.67 \text{ ms} + T'_{ASN_GW} + T_{R6}$

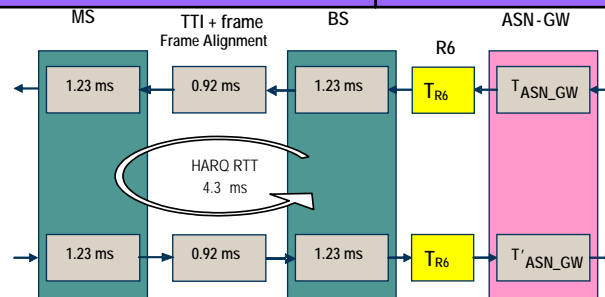


Table 2 Data plane access latency. The above processing time is FFS.

A2.2 Control Plane Access Latency

The break down of system entry procedure from DL scanning and synchronization to the point where the radio resource control (RRC) connection is established is shown in Table 3. Note that the use of super-frame header, that encompasses the system configuration information, would significantly reduce the time spent in step 1. Also, since the probability of error required for transmission of some of the MAC control messages is typically 10^{-3} , H-ARQ is used to ensure more reliability. The use of shorter TTI and faster transmissions would enable shorter H-ARQ retransmission, consequently reducing the total time for IDLE_STATE to ACTIVE_STATE transition.

In addition, we assume that the base station, relay station, or mobile station processing time is approximately $2 * TTI = 1.23 \text{ ms}$, that further reduces the total delay budget. It is shown that the IDLE_STATE to ACTIVE_STATE transition time of less than 80 ms is achievable through the use of proposed frame structure which is less the 100 ms value specified by the SRD.

It must be noted that some of the radio resource control and management messages require probability errors in the order of 10^{-6} ; ARQ is used in conjunction with H-ARQ to achieve higher transmission reliability.

Step	Description	IEEE 802.16e Value	IEEE 802.16m Value
0	MS wakeup time	Implementation dependent	Implementation dependent
1	DL scanning and synchronization + DL MAP acquisition + DCD/UCD acquisition	> 300 ms (Assuming 0.5 s DCD/UCD interval)	20 ms
2	Random Access Procedure (UL CDMA Code + BS Processing + DL CDMA_ALLOC_IE)	> 15 ms	< 5 ms
3	Initial Ranging (RNG-REQ + BS Processing + RNG-RSP)	> 15 ms (0.3*20 ms for H-ARQ ReTX)	< 5 ms (0.3* 4.3 ms for H-ARQ)
4	Capability Negotiation (SBC-REQ + BS Processing + SBC-RSP) + H-ARQ Retransmission @ 30%	> 15 ms (0.3*20 ms for H-ARQ ReTX)	< 5 ms (0.3* 4.3 ms for H-ARQ ReTX)
5	Authorization and Authentication/Key Exchange (PKM-REQ + BS Processing + PKM-RSP + ...) +H-ARQ Retransmission @30%	> 15 ms (0.3*20 ms for H-ARQ ReTX)	< 5 ms (0.3* 4.3 ms for H-ARQ ReTX)
6	Registration (REG-REQ + BS/ASN-GW Processing + REG-RSP) + H-ARQ Retransmission @30%	> 15 ms (0.3*20 ms for H-ARQ ReTX)	< 5 ms (0.3* 4.3 ms for H-ARQ ReTX)
7	RRC Connection Establishment (DSA-REQ + BS Processing + DSA-RSP + DSA-ACK) + H-ARQ Retransmission @30%	> 15 ms (0.3*20 ms for H-ARQ ReTX)	< 5 ms (0.3* 4.3 ms for H-ARQ ReTX)
	Total C-plane connection establishment Delay	> 80 ms	< 30 ms
	Total IDLE_STATE -> ACTIVE_STATE Delay	> 380 ms	< 80 ms

Table 3 Control plane access latency. The above processing time is FFS.

1
2
3
4
5
6