

Baseline proposal for a 400 Gb/s optical PMD supporting four MMF pairs

Jonathan Ingham (Foxconn Interconnect Technology)

IEEE P802.3cm 400 Gb/s over Multimode Fiber Task Force

Ad Hoc Teleconference, 21 June 2018

Supporters

- John Abbott (Corning)
- Adrian Amezcua (Prysmian)
- Mabud Choudhury (OFS)
- Doug Coleman (Corning)
- Darryl Heckle (Corning)
- Kenneth Jackson (Sumitomo Electric)
- Harold Kamisugi (Sumitomo Electric)
- Ilya Lyubomirsky (Inphi)
- Christophe Metivier (Arista)
- Ramana Murty (Broadcom)
- Gary Nicholl (Cisco)
- Mark Nowell (Cisco)
- Vasu Parthasarathy (Broadcom)
- David Piehler (Dell EMC)
- Steve Swanson (Corning)
- Eddie Tsumura (Sumitomo Electric)
- Chongjin Xie (Alibaba)

Contents

- Adopted physical layer specification objectives
- Motivation
- OM3 and OM4 performance
- Bi-directional approach
- Baseline proposal
- Position in 802.3 architecture
- Transmit center wavelength ranges
- Transmit characteristics
- Receive characteristics
- Illustrative link power budget
- Summary

Adopted physical layer specification objectives

- Define a physical layer specification that supports 400 Gb/s operation over 4 pairs of MMF with lengths up to at least 100 m
- Define a physical layer specification that supports 400 Gb/s operation over 8 pairs of MMF with lengths up to at least 100 m

Motivation (1)

- Expect broad market potential for a four-fiber-pair MMF PMD at 400 Gb/s. For example, this provides an attractive upgrade path for users of the successful 100GBASE-SR4 PMD
- Current MMF infrastructure is mainly single-fiber-pair or four-fiber-pair. Hence, standardization of a four-fiber-pair MMF PMD at 400 Gb/s helps to maintain the relevance of this infrastructure
- Large industry investment in MMF WDM in recent years:
 - (i) proven and widely-adopted two-wavelength transceivers such as 40G Bi-Di and 100G Bi-Di
 - (ii) SWDM MSA four-wavelength specifications
 - (iii) completion of TIA-492AAAE and subsequent OM5 standardization

Motivation (2)

- Technical feasibility already demonstrated for RS(544, 514) FEC-supported 26.5625 GBd PAM4 modulation using uncooled VCSELs
- The above is under standardization as 50GBASE-SR, 100GBASE-SR2 and 200GBASE-SR4 in Clause 138 and is expected to form the basis of 400GBASE-SR8
- Existing two-wavelength WDM products, such as 40G Bi-Di and 100G Bi-Di, support MMF with transmission in the 847 to 863 nm and 900 to 916 nm ranges
- In particular, 100G Bi-Di uses RS(544, 514) FEC and 26.5625 GBd PAM4 modulation to achieve 70 m, 100 m and 150 m reach over OM3, OM4 and OM5, respectively

OM3 and OM4 performance


- Field-proven WDM products exist using OM3 and OM4 with transmission in the wavelength ranges in this proposal
- Guidance from fiber manufacturers has been received regarding performance of OM3 and OM4 in these wavelength ranges
- Furthermore, TIA and IEC are in the process of providing formal guidance on OM3 and OM4 bandwidth over the entire 840 to 953 nm wavelength range (see kolesar_NGMMF_02_jan18)

Bi-directional approach

- Both bi-directional and co-directional approaches are technically feasible
- A bi-directional approach offers the simplicity of only one VCSEL launch into each end of a fiber. Hence it is easier to condition the launch to meet encircled flux requirements. It is also preferable for eye safety
- Furthermore, a bi-directional approach has the significant advantage of allowing breakout from a “400GBASE-SR4.2” transceiver to four 100G Bi-Di transceivers
- 100G Bi-Di is a multi-vendor solution


Baseline proposal

- Bi-directional WDM transmission with required operating range of 0.5 m to 70 m OM3, 0.5 m to 100 m OM4 and 0.5 m to 150 m OM5
- Using the RS(544, 514) FEC in the 400GBASE-R PCS, then for each lane: 26.5625 GBd PAM4 modulation with a pre-FEC BER requirement^a of 2.4×10^{-4}

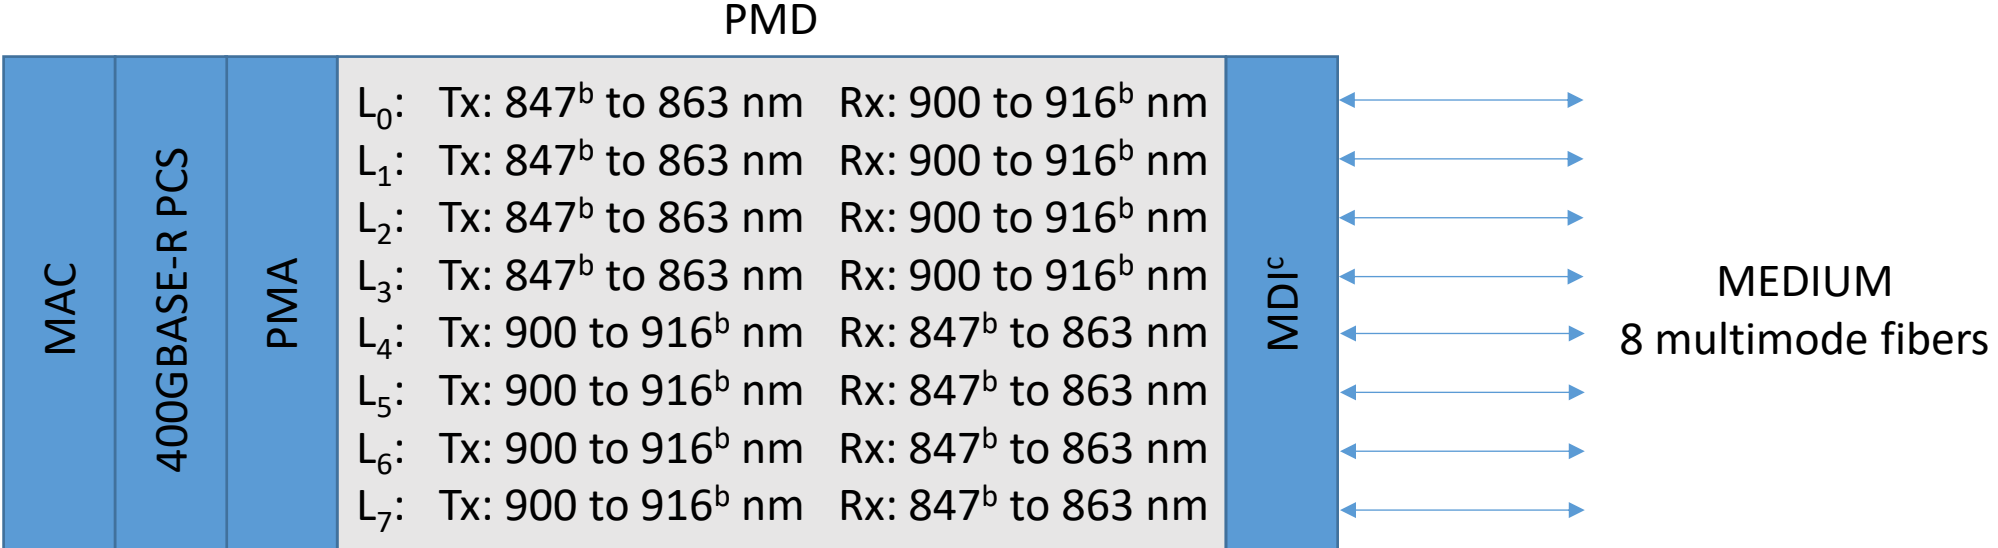

^aProvided that the error statistics are sufficiently random to meet an appropriate frame loss ratio requirement (to be determined).
^bOuter wavelengths (currently 847 nm and 916 nm) might be adjusted to widen the ranges (under discussion).
^cMDI lane assignment to be determined.

Position in 802.3 architecture

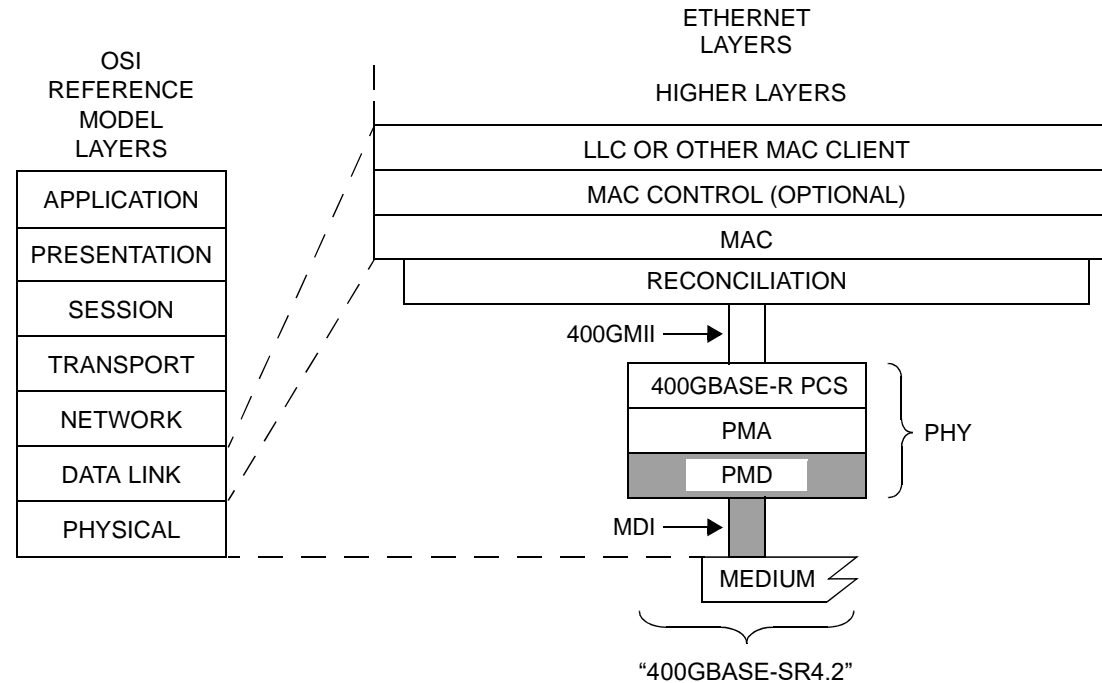

400GMII = 400 Gb/s MEDIA INDEPENDENT INTERFACE
 LLC = LOGICAL LINK CONTROL
 MAC = MEDIA ACCESS CONTROL
 MDI = MEDIUM DEPENDENT INTERFACE
 PCS = PHYSICAL CODING SUBLAYER

PHY = PHYSICAL LAYER DEVICE
 PMA = PHYSICAL MEDIUM ATTACHMENT
 PMD = PHYSICAL MEDIUM DEPENDENT

SR = PMD FOR MULTIMODE FIBER

Transmit center wavelength ranges

Lane	Transmit center wavelength range
L ₀ to L ₃	847 to 863 nm
L ₄ to L ₇	900 to 916 nm

- These ranges are proposed on the basis of being close to optimal for two-wavelength solutions
- The range for L₀ to L₃ is shifted higher than the conventional 840 to 860 nm range in order to benefit from improved VCSEL speed
- ≈40 nm guard band allows very low cost filter technology
- VCSELS with these specifications are commercially available from component vendors
- Mature VCSEL technology and volume production due to use in 40G Bi-Di and 100G Bi-Di transceivers. For each range above, VCSEL shipments to date of several million with device hours in the tens of billions
- Interoperation with four-wavelength solutions is not expected to be required and therefore not a criterion in this wavelength proposal
- The outer wavelengths (currently 847 nm and 916 nm) might be adjusted to widen the ranges (under discussion)

Transmit characteristics

Description	Value	Unit
Signaling rate, each lane (range)	26.5625 ± 100 ppm	GBd
Center wavelength, L ₀ to L ₃ (range)	847 ^a to 863	nm
Center wavelength, L ₄ to L ₇ (range)	900 to 916 ^a	nm
Modulation format, each lane	PAM4	
RMS spectral width, each lane ^b (max)	0.6	nm
Average launch power, each lane (max)	4	dBm
Average launch power, each lane (min)	-6.5	dBm
OMA _{outer} , each lane (max)	3	dBm
OMA _{outer} , each lane ^c (min)	-4.5	dBm
OMA _{outer} – TDECQ, each lane (min)	-5.9	dBm
Transmitter and dispersion eye closure for PAM4 (TDECQ), each lane (max)	4.5	dB
Average launch power of OFF transmitter, each lane (max)	-30	dBm
Extinction ratio, each lane (min)	3	dB
Transmitter transition time, each lane (max)	34	ps
RIN ₁₂ OMA, each lane (max)	-128	dB/Hz
Optical return loss tolerance, each lane (max)	12	dB
Encircled flux, each lane ^d	≥ 86% @ 19 μm, ≤ 30% @ 4.5 μm	

Test methodology is assumed to be based on 138 (D3.3).

^aOuter wavelengths (currently 847 nm and 916 nm) might be adjusted to widen the ranges (under discussion).

^bRMS spectral width is the standard deviation of the spectrum.

^cEven if TDECQ < 1.4 dB, OMA_{outer} (min) must exceed this value.

^dIf measured into type A1a.2, type A1a.3 or type A1a.4, 50 μm fiber, in accordance with IEC 61280-1-4.

Receive characteristics

Description	Value	Unit
Signaling rate, each lane (range)	26.5625 ± 100 ppm	GBd
Center wavelength, L ₀ to L ₃ (range)	900 to 916 ^a	nm
Center wavelength, L ₄ to L ₇ (range)	847 ^a to 863	nm
Modulation format, each lane	PAM4	
Damage threshold, each lane ^b (min)	5	dBm
Average receive power, each lane (max)	4	dBm
Average receive power, each lane ^c (min)	-8.5	dBm
Receive power (OMA _{outer}), each lane (max)	3	dBm
Receiver reflectance, each lane (max)	-12	dB
Stressed receiver sensitivity (OMA _{outer}), each lane ^d (max)	-3.5	dBm
Receiver sensitivity (OMA _{outer}), each lane ^e (max)	max(-6.6, SECQ - 8)	dBm
Conditions of stressed receiver sensitivity test ^f :		
Stressed eye closure for PAM4 (SECQ), lane under test	4.5	dB
OMA _{outer} of each aggressor lane	3	dBm

Test methodology is assumed to be based on 138 (D3.3).

^aOuter wavelengths (currently 847 nm and 916 nm) might be adjusted to widen the ranges (under discussion).

^bThe receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level on one lane. The receiver does not have to operate correctly at this input power.

^cAverage receive power, each lane (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.

^dMeasured with conformance test signal at TP3 (see 138.8.8 (D3.3)) for the BER specified (to be confirmed).

^eReceiver sensitivity is informative and is defined for a transmitter with a value of SECQ up to 4.5 dB.

^fThese test conditions are for measuring stressed receiver sensitivity. They are not characteristics of the receiver.

Illustrative link power budget

Parameter	OM3	OM4	OM5	Unit
Effective modal bandwidth at 850 nm	2000 ^a	4700 ^a	4700 ^a	MHz km
Effective modal bandwidth at 916 nm	1220 ^b	1880 ^b	2940 ^a	MHz km
Power budget (for max TDECQ)	6.6			dB
Operating distance	70	100	150	m
Channel insertion loss ^c	1.8	1.9	2	dB
Allocation for penalties ^d (for max TDECQ)	4.6			dB
Additional insertion loss allowed	0.2	0.1	0	dB

^aPer IEC 60793-2-10.

^bPer draft IEC 60793-2-10 (subject to confirmation by TIA and IEC).

^cThe channel insertion loss is calculated using the maximum distance specified on Slide 9 and cabled optical fiber attenuation of 3.5 dB/km at 850 nm plus an allocation for connection and splice loss given in 138.10.2.2.1 (D3.3).

^dLink penalties are used for link budget calculations. They are not requirements and are not meant to be tested.

Summary

- Slides 9 to 14 provide a baseline proposal for “400GBASE-SR4.2” based on FEC-supported 26.5625 GBd PAM4 modulation
- Transmit and receive characteristics are based on Clause 138 (D3.3) facilitating easy standardization using established metrics, notably TDECQ and SECQ
- OM3 and OM4 performance in the proposed wavelength ranges is field proven and formal guidance is expected from TIA and IEC
- Bi-directional approach allows breakout to multi-vendor 100G Bi-Di transceiver