

# RAP Backwards Compatibility

A ProAV requirement

Morten Lave, Brajendra Kumar Singh (Adamson)

Simon Gapp, Philipp Hortig, Henning Kaltheuner (d&b audiotechnik)

Marina Gutiérrez, Genio Kronauer, Martin Zarzycki (L-Acoustics)

Stijn Geysen, Davy Hermans (Luminex)

Richard Bugg (Meyer Sound)



# Administration

This presentation is the collaborative work of the Presenter and Co-Authors that was performed in Avnu ProAV Work Group meetings.

This is not an official publication from Avnu.org, but permission was granted to use the Avnu template to show multi-company consensus on the items enclosed.

# ProAV context

## Large install base of devices using MSRP


- A new protocol incompatible with MSRP would be disruptive

## Networked ProAV devices will be present in all kind of buildings and industrial context

- Touring is often seen as core ProAV market, but it is just ‘visible tip of the iceberg’
- Strong need for convergence with other protocols in installations

## Existing misconception: “AVB is for ProAV, TSN is not”

- Making RAP not backwards compatible would only feed it
- ProAV will make use of TSN for scalability reasons, e.g. backbones connecting MSRP regions.

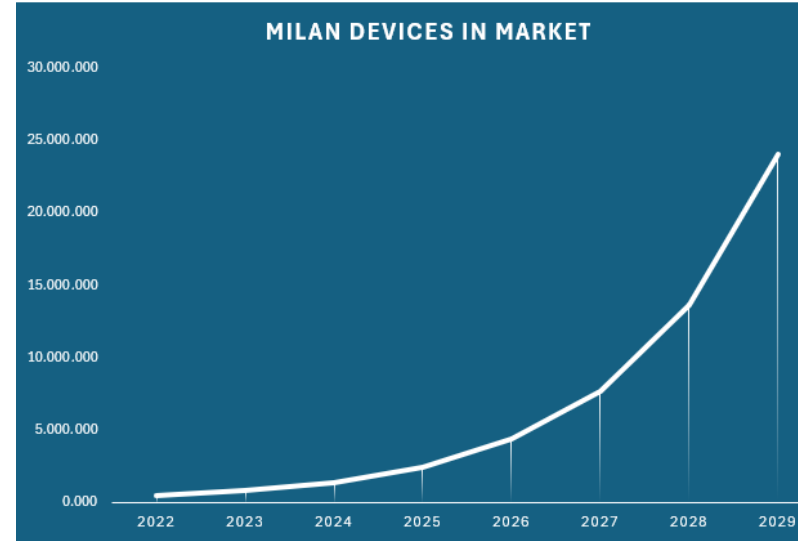

\*POSSIBLE DEVELOPMENT / PROJECTION

# MSRP in ProAV networks

MSRP is extensively used in ProAV systems


ProAV network size\*:

- 8-10k End-stations
- 4-5000 Audio Streams
- 100 Video Streams
- 8-10k Control Streams
- Systems structured in sub-nets

→ MSRP lack of scalability is a known problem!

\*More details:

<https://www.ieee802.org/1/files/public/docs2021/new-kaltheuner-et-al-TSN-across-ecosystems-0321-v01.pdf>

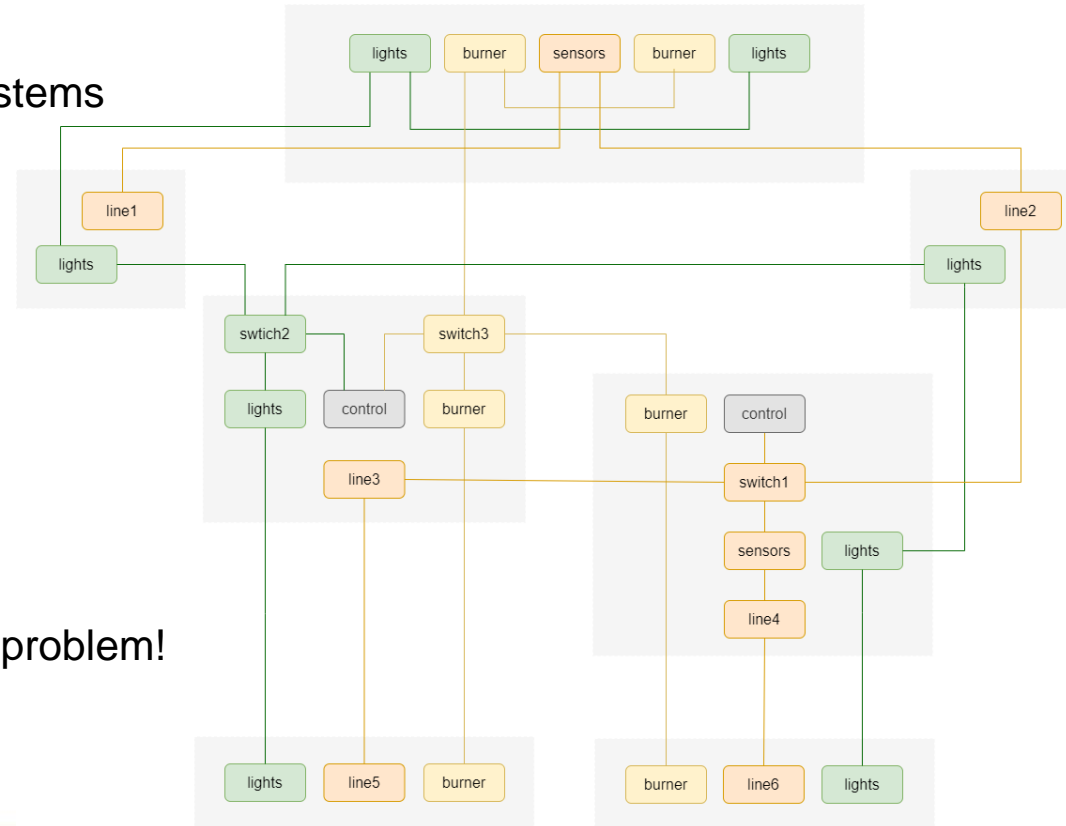

# RAP (+LRP)

- Designed to improve on scalability and performance
- Enabler for converged networks
- Might end up replacing MSRP (+MRP)...

... but there are thousands of active MSRP devices  
→ backwards compatibility is necessary!


# RAP-MSRP backwards compatibility

Use case:

- large deployments
- RAP backbone
- SRP domains on the edges

Streams:

- talker and listener on SRP domain
  - traversing RAP domain
  - not traversing RAP domain
- talker on SRP domain and listener on RAP domain
  - and the other way around
- talker and listener on RAP domain

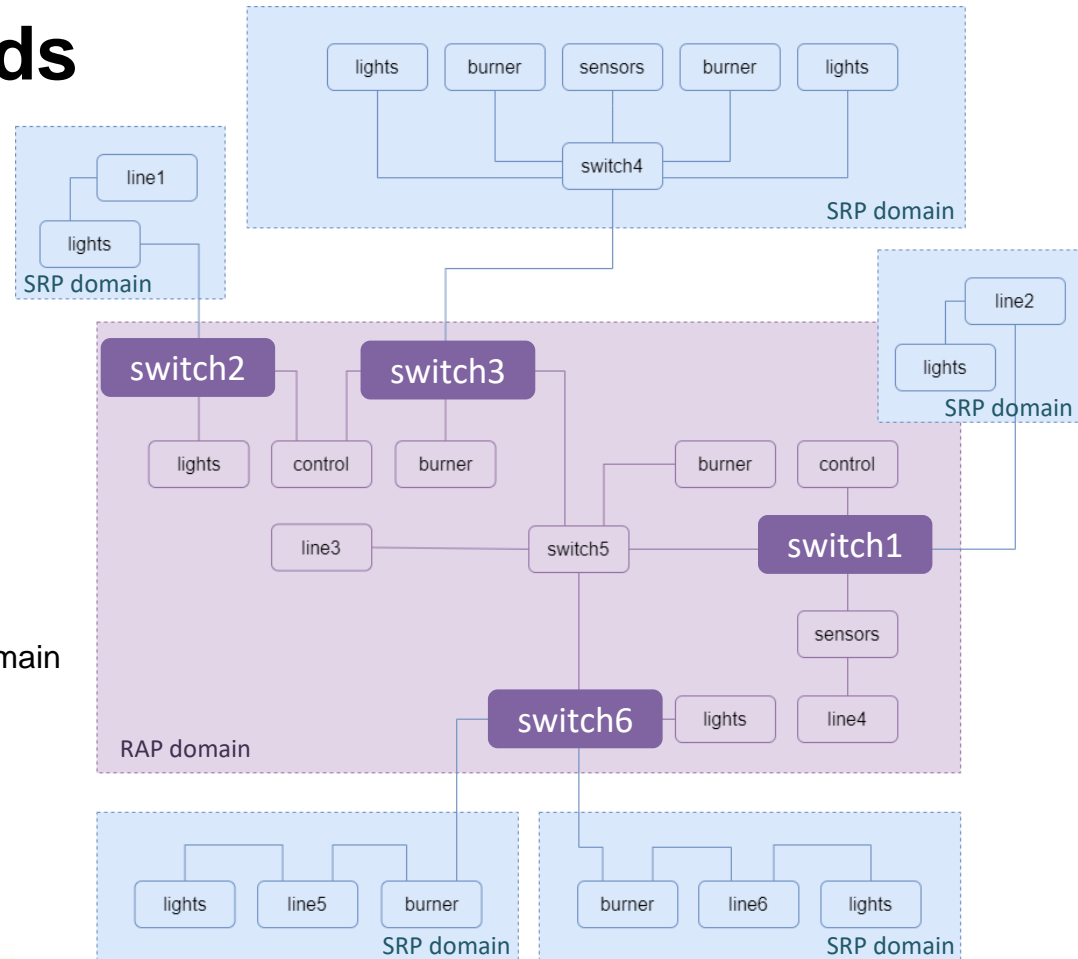

# How can it be achieved?

On a first glance:

- MSRP – RAP adapter
- Proxy

From:  
<https://www.ieee802.org/1/files/public/docs/2017/tsn-chen-RAP-whitepaper-1117-v02.pdf>

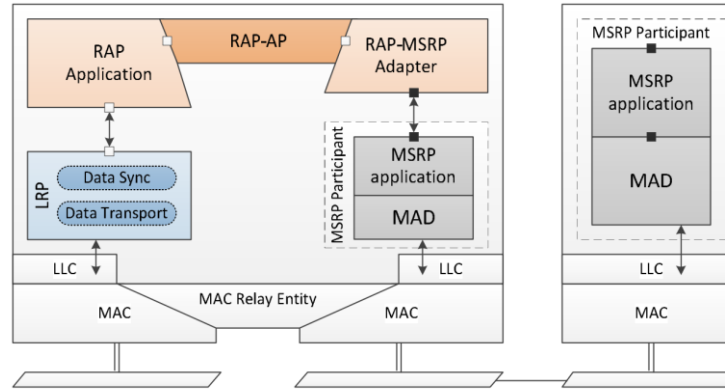


Figure 3 - Bridge in support of both RAP and MSRP for backward-compatibility

→ On-going effort within Avnu to find a technical solution.

The results of that analysis will be presented in a follow-up TSN meeting.

# Conclusions

- RAP (+LRP) is the natural successor of MSRP (+MRP)
- Converged networks will create systems with MSRP and RAP
- RAP backwards compatibility with MSRP is a requirement for ProAV networks

# Request

- Add the following sentence to the scope of P802.1DD:  
“This standard makes provisions for backwards compatibility with the Multiple Stream Resource Protocol defined in Clause 35 of IEEE Std 802.1Q-2022.”