

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Minimizing IP Connectivity Delay During Network (Re)Entry	
Date Submitted	2004-06-25	
Source(s)	<p>Branislav Meandzija ArrayComm, Inc. 2480 N. First Street San Jose, CA 95131-1014</p> <p>Prakash Iyer Intel Corporation 2111 NE 25th Ave, MS: JF3-206 Hillsboro OR 97124</p>	<p>Voice: 408.428.9080 Fax: 408.428.9083 bran@arraycomm.com</p> <p>Voice: 503-264-1815 Fax: 503-264-4230 prakash.iyer@intel.com</p>
Re:	Contribution on comments to IEEE P802.16e/D3	
Abstract	IP Connectivity Optimization	
Purpose	To be integrated into IEEE P802.16e/D3 document	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Minimizing IP Connectivity Delay During Network (Re)Entry

Dr. Branislav Meandzija, Prakash Iyer

1 Introduction

A number of contributions related to a) providing hints on neighbor BS advertisements to indicate whether a Target BS HO will incur an IP subnet/prefix/mobility agent switch and b) minimizing the delay introduced by IP connectivity acquisition following network (re)entry have been proposed so far (see references below). The HO adhoc group has recently agreed on a revision to MOB-NBR-ADV message by adding a HO optimization flag to indicate if HO to a neighbor BS would incur an IP subnet/prefix/mobility agent switch.

In this contribution, we propose a solution enabling a HO target BS in a WiMAX RAN (in one of many possible RAN configurations) to attempt to reacquire the same IP connectivity context as in with its previous serving BS based on information provided by the MSS. The extensions recommended in the contribution are optional and equally applicable to Normal Operation and Idle mode operation.

2 References

- [1] IEEE P802.16e/D3 draft working document.
- [2] IEEE C802.16e-04/51r1, Minimization of Handoff Interruption Time Optimizing IP Address Assignment Procedure, Dongkie Lee et al.
- [3] IEEE C802.16e-04/68r2, Subnet Zone ID Support, Y. Chang et al.
- [4] IEEE C802.16e-04/76r2, Handover – Data Forwarding and deferring IP re-establishment, Yong-Ho Kim.
- [5] IEEE C802.16e-04/90r2, Minimizing IP Connectivity Establishment Procedure, Yong-Ho Kim.
- [6] IEEE C802.16e-03/NNr0, Minimization of IP Connection Re-establishment Procedure, Sungjin Lee et al.

3 Problem definition

IEEE 802.16e has currently no provision as part of network (re)entry MAC messaging for an MSS to determine if its IP connectivity context would change and skip IP context acquisition procedures if this were not to be the case. An MSS may acquire an IP address and related connectivity context information such as the DNS server address, default gateway, subnet mask and so on using a variety of mechanisms such as DHCP, PPP/PCP, router prefix advertisements, mobility agent advertisements and so on. Without reliable indications during the network (re)entry procedure, an MSS will incur delay in attempting to reacquire its IP connectivity context – and in many instances, ends up acquiring the same context as with the previous base station. Previous proposals to solve this problem have introduced concepts like Network ID, Subnet Zone ID, Access Router ID and so on, which introduce administrative overhead.

4 Overview of Proposed Harmonization

The HO Adhoc group has adopted a new HO optimization flag (bit #3) in MOB-NBR-ADV which may be set by a serving BS to indicate (a hint) if HO to the corresponding target BS may in fact incur an IP connectivity context change.

In this contribution we propose a solution that would enable a WiMAX HO Target base station to reacquire an MSS's IP connection context thereby speeding up the network entry procedure and minimizing impact of an IP address change to active applications and services on the MSS at the time of HO. The solution does not introduce any new administrative requirements and is independent of the RAN architecture which may use VLANs, PPP switching, MPLS, IP routing (v4 or v6), IP tunneling, or something else. The 2 steps involved are as follows:

1. When the MSS initially obtains an IP address either statically, through DHCP, or auto-configuration, it also obtains the Fully Qualified Domain Name (FQDN) of the Gateway Access Router (GAR). For example using DHCP, the DHCP server could be configured to offer the FQDN as follows:
 OPTION GAR-FQDN CODE 197 = text
 and then communicate the FQDN of the GAR to the MSS as
 OPTION GAR-FQDN "ar1.operator-xyz.com"
2. The MSS provides the FQDN of the previous GAR and its own (the MSSs) last IP address as an optional TLV in the MOB-REG-REQ message to a target BS as part of HO/network (re)entry procedure. This allows the target BS to find out what type of connectivity it can facilitate to the AR identified by the FQDN and inform the MSS whether it needs to re-establish its IP address or not in the MOB-REG-RSP message.

The essential idea of the proposal is illustrated in the Figure below:

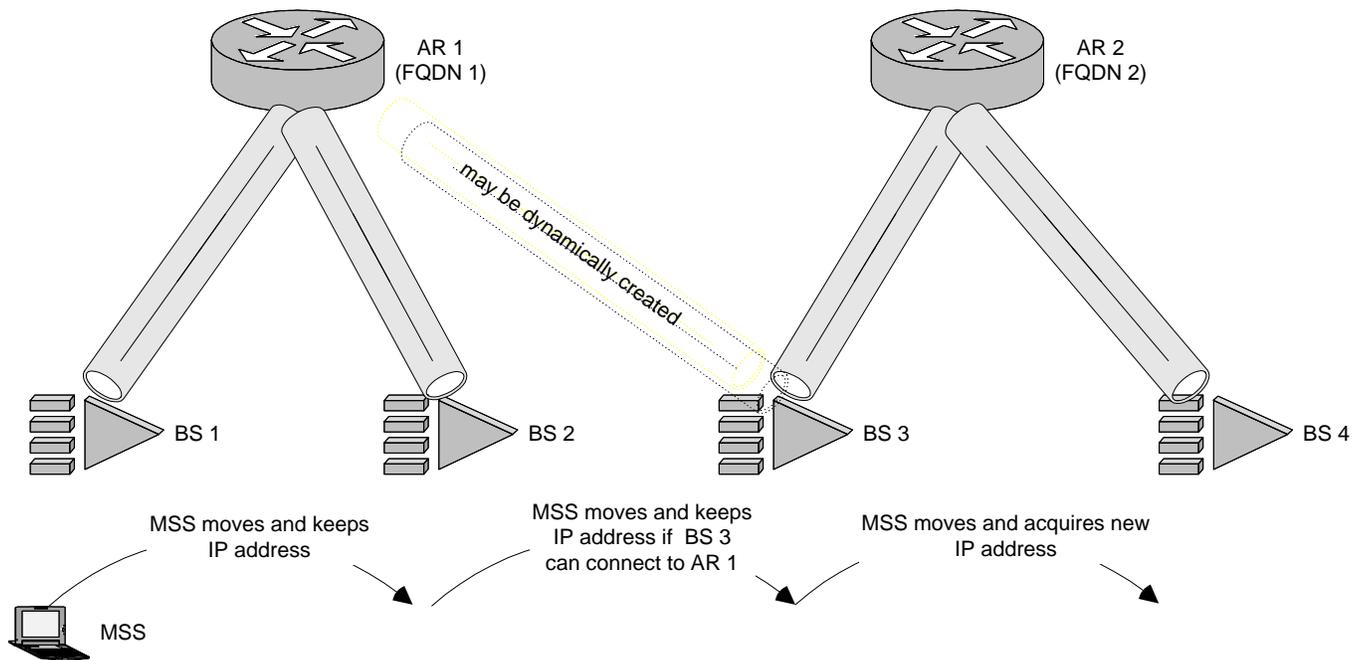


Figure 1 MSS is handed over and keeps IP address when it connects to BS 3

5 Proposed Changes to 802.16e/D3 draft:

Remedy 1:

Replace following text on page 7, starting line 54:

Finally, the Secondary Management Connection is used by the BS and MSS to transfer delay tolerant, standards-based [Dynamic Host Configuration Protocol (DHCP), router prefix advertisements, Mobile IP, Trivial File Transfer Protocol (TFTP), SNMP, etc.] management messages. These management messages are terminated at the MSS.

with

Finally, the Secondary Management Connection is used by the BS and MSS to transfer delay tolerant, standards-based [Dynamic Host Configuration Protocol (DHCP), router prefix advertisements, Mobile IP, Trivial File Transfer Protocol (TFTP), SNMP, etc.] management messages. These management messages are terminated at the MSS.

An MSS supporting the optional GAR-FQDN and MSS-PREV-IP-ADDR TLV parameters in MOB-REG-REQ message, shall store the Fully Qualified Domain Name (FQDN) of the Gateway Access Router (GAR) as part

of the standard IP host configuration procedure as the first name server (e.g. in resolv.conf on many systems). In systems using DHCP, the DHCP server shall be configured to offer the FQDN as follows:

```
OPTION GAR-FQDN CODE 197 = text
and then communicate the FQDN of the GAR to the MSS as
OPTION GAR-FQDN "ar1.operator-xyz.com"
```

Remedy 2:

Add the following text to the end of section 6.3.20.4

An MSS may include the GAR-FQDN and GAR-PREV-IP-ADDR TLV parameters in the MOB-REG-REQ message to a Target BS. A Target BS may return XXX in MOB-REG-RSP to indicate to the MSS if IP address (and related connection context) acquisition may be skipped for Normal Operation.

Remedy 3:

Add the following section before section 11.8, page 108, line 18:

11.7.9 GAR-FQDN

The GAR-FQDN parameter specifies the Fully Qualified Domain Name of a gateway access router (GAR). A fully qualified domain name consists of a host and domain name, including top-level domain. A FQDN always starts with a host name and continues all the way up to the top-level domain name, so www.parc.xerox.com is also a FQDN.

Type	Length	Value	Scope
9	variable	string	MOB-REG-REQ

This will be a bit string

11.7.10 MSS-PREV-IP-ADDR

<< Add description text >>

Type	Length	Value	Scope
10	variable	string	MOB-REG-REQ

11.7.11 SKIP-ADDR-ACQUISITION

The SKIP-ADDR-ACQUISITION parameter indicates to an MSS whether it should reacquire its IP address and related context or reuse its prior context.

Type	Length	Value	Scope
11	1	0 – No IP address change 1 – Reacquire IP address	MOB-REG-RSP