

Project	IEEE 802.16 Broadband Wireless Access Working Group < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	Extension of collaborative spatial multiplexing in OFDMA	
Date Submitted	2004-11-16	
Source(s)	Bin-Chul Ihm, Yongseok Jin, Jinyoung Chun, Kyuhyuk Chung	Voice: 82-31-450-7187 Fax: 82-31-450-7912
	LG Electronics, Inc. 533, Hogue-1dong, Dongan-gu, Anyang-shi, Kyongki-do, Korea	[mailto: {bcihm, jayjay, jychun03, kyuhuk} @lge.com]
	Ran Yaniv, Tal Kaitz	[mailto: {ran.yaniv, tal.kaitz} @alvarion.com]
	Alvarion Ltd.	
Re:	This is a response to a Call for Comments on IEEE P802.16e-D5	
Abstract	The collaborative spatial multiplexing can be applied to the case in OFDMA.	
Purpose	This document is submitted for review by 802.16e Working Group members. <b>Green line indicates the revised text and we revise and add simulation results because we got the comments.</b>	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

# Extension of Collaborative Spatial Multiplexing in OFDMA

*Bin-chul Ihm, Jinyoung Chun, Yongseok Jin, and Kyuhyuk Chung*  
*LG Electronics*

*Ran Yaniv, Tal Kaitz*  
*Alvarion Ltd.*

## 1. Introduction


In OFDMA of the current 802.16 standard, collaborative spatial multiplexing mode is supported through MIMO\_UL\_BASIC\_IE(). Two single transmit antenna SS's can perform collaborative spatial multiplexing onto the same subchannel. This mode can result capacity increment by assigning same uplink resource to two SS's simultaneously.

And the collaborative spatial multiplexing can be applied to the case where two SS's have 2 transmit antennas when BS has two or more receive antennas. So, we propose the MIMO\_UL\_Enhanced\_IE() for applying the above case.

## 2. Feasible collaborative SM modes

There are various feasible collaborative SM modes according to the following combinations of # of transmit antennas in SS and STC configuration (STTD or SM). The current collaborative SM corresponds to the first example of the followings.


- Collaborative SM example #1



Transmission format uses matrix  $B = \begin{bmatrix} S_i \\ S_{i+1} \end{bmatrix}$

(See 8.4.8.3.3 Transmission schemes for 2-antenna BS in DL)

- Collaborative SM example #2

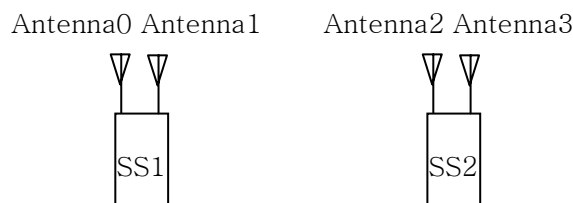

Transmission format uses matrices

$$A = \begin{bmatrix} s_i^{(1)} & -s_{i+1}^{(1)*} & 0 & 0 \\ s_{i+1}^{(1)} & s_i^{(1)*} & 0 & 0 \\ 0 & 0 & s_i^{(2)} & -s_{i+1}^{(2)*} \\ 0 & 0 & s_{i+1}^{(2)} & s_i^{(2)*} \end{bmatrix}$$


---


$$B = \begin{bmatrix} s_i^{(1)} & -s_{i+1}^{(1)*} & s_{i+2}^{(1)} & -s_{i+3}^{(1)*} \\ s_{i+1}^{(1)} & s_i^{(1)*} & s_{i+3}^{(1)} & s_{i+2}^{(1)*} \\ s_i^{(2)} & -s_{i+1}^{(2)*} & s_{i+2}^{(2)} & -s_{i+3}^{(2)*} \\ s_{i+1}^{(2)} & s_i^{(2)*} & s_{i+3}^{(2)} & s_{i+2}^{(2)*} \end{bmatrix}$$


---


$$C = \begin{bmatrix} s_i^{(1)} \\ s_{i+1}^{(1)} \\ s_i^{(2)} \\ s_{i+1}^{(2)} \end{bmatrix}$$

(See 8.4.8.3.5 Transmission schemes for 4-antenna BS)

### 3. Proposition

For the purpose of realizing the above configurations, we propose more pilot patterns to support the various collaborative SM modes. The second examples in the aforementioned collaborative SM examples require four pilot patterns to distinguish the channels from each antenna of SS's.

In addition, we suggest the MIMO\_UL\_Enhanced\_IE() to indicate the various collaborative SM modes and to support that SS has two transmit antennas.

### 4. Simulation result

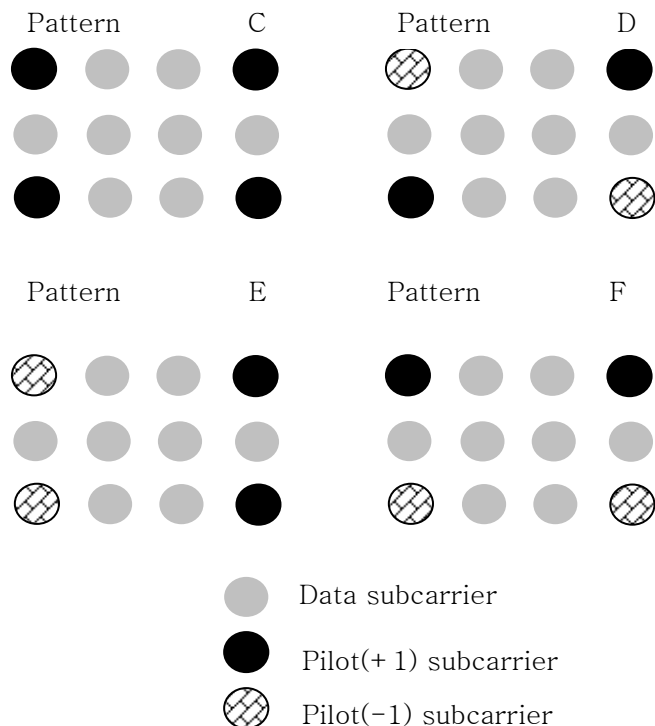


Figure 1. Proposed patterns C/D/E/F in UL PUSC mode

The performance results of the proposed pilot patterns are shown in Fig 1, 2, 3, and 4.

Fig 2 and 3 are shown performances in case of single MSS with dual antennas and a BS with dual antennas. And figure 4 and 5 are in case of two MSSs with dual antennas and a BS with 4 antennas. Both a tile using pilot pattern A/B and a tile using pilot pattern C/D/E/F are same total pilot power.

In the first case, the proposed pilot patterns are better than the current pilot patterns A/B (Using the CC 1/2 rate QPSK, Pedestrian B channel with 10km/h, the PUSC mode and the transmission matrix A for 2-antenna MSS in UL).

And, in the second case, the proposed pilot patterns cannot compare since current spec has not any pilot pattern for 4 antennas. The proposed pilot pattern has the FER about 1.7E-3 in 0dB (Using the CC 1/2 rate QPSK, Pedestrian B channel with 10km/h, the PUSC mode and the proposed transmission matrix B for dual 2-antenna MSS in UL (same to matrix B in 8.4.8.3.5)).

And also we add the performance results of figure 6 and 7 in Vehicular A channel with 60 km/h.

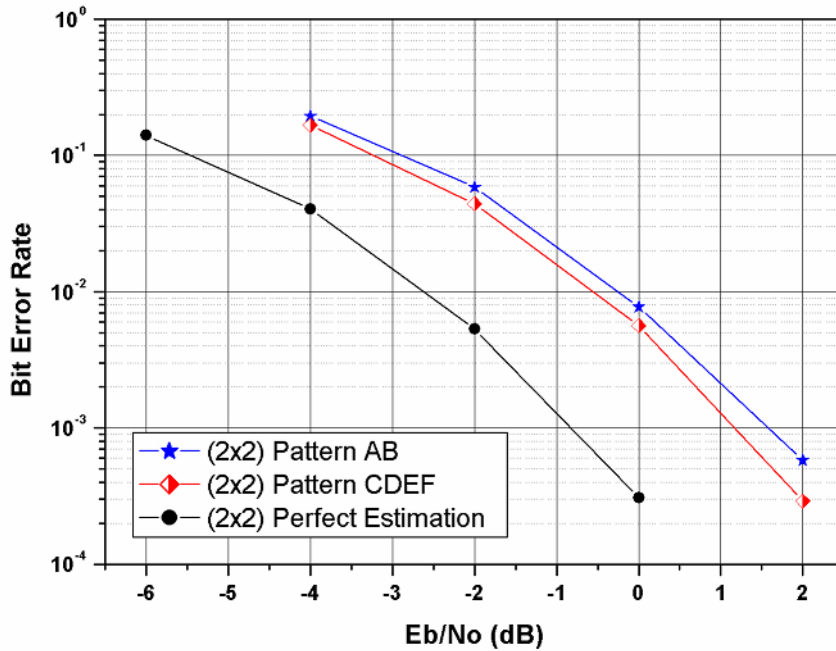


Figure 2. BER for single MSS with dual antennas and BS with dual antennas (Pedestrian B with 10km/h)

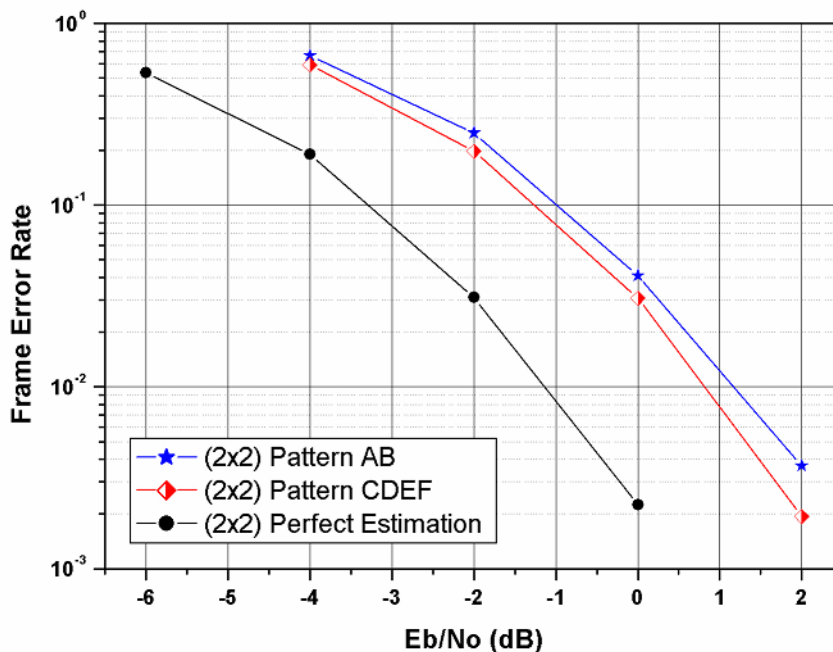


Figure 3. FER for single MSS with dual antennas and BS with dual antennas (Pedestrian B with 10km/h)

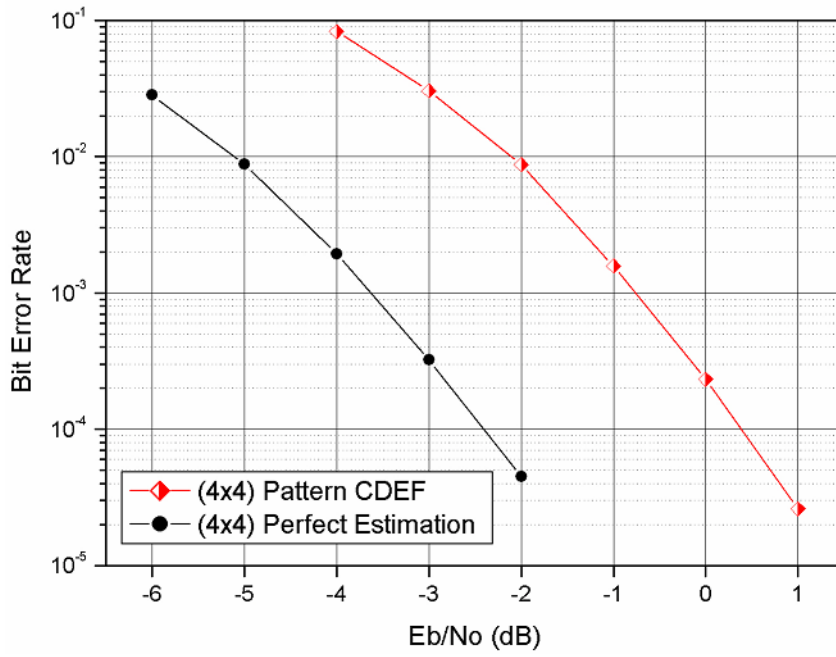


Figure 4. BER for dual MSSs with dual antennas and BS with 4 antennas (Pedestrian B with 10km/h)

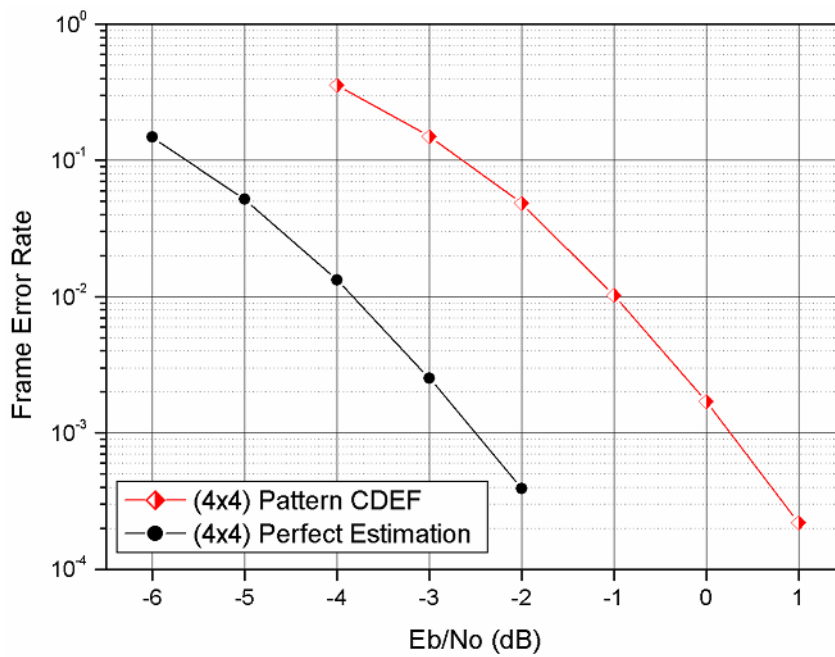


Figure 5. FER for dual MSSs with dual antennas and BS with 4 antennas (Pedestrian B with 10km/h)

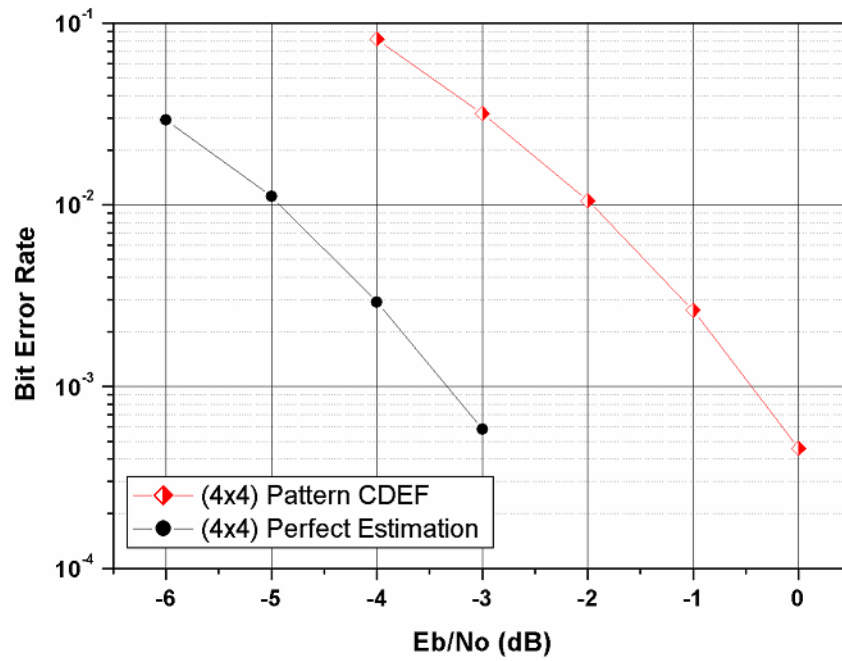


Figure 6. BER for dual MSSs with dual antennas and BS with 4 antennas (Vehicular A with 60km/h)

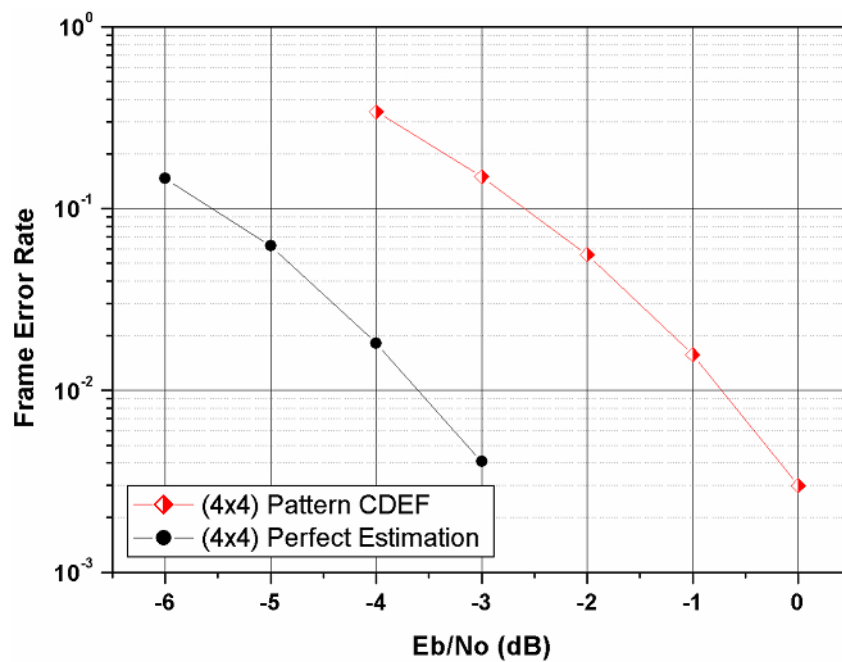


Figure 7. FER for dual MSSs with dual antennas and BS with 4 antennas (Vehicular A with 60km/h)

## 5. Proposed Text Change

*[Add a new Section 8.4.5.4.19]*

[8.4.5.4.19 MIMO UL Enhanced IE format](#)

In the UL-MAP, a MIMO-enabled BS may transmit UIUC=15 with the MIMO UL Enhanced IE() to indicate the MIMO mode and configuration of the subsequent uplink allocation to a specific MIMO-enabled MSS CID and to define various pilot patterns in order to estimate channel of SS's. The mode indicated in the MIMO UL Enhanced IE() shall only apply to the subsequent uplink allocation until the end of frame.

Table xxx – MIMO UL Enhanced IE () format

Syntax	Size	Notes
<u>MIMO_UL_Enhanced_IE () {</u>		
<u>Extended_UIUC</u>	<u>4bits</u>	<u>Enhanced MIMO=0x0f</u>
<u>Length</u>	<u>4bits</u>	<u>Length of the message in bytes (variable)</u>
<u>Num_Assign</u>	<u>4bits</u>	<u>Number of burst assignment</u>
For (j=0; j< Num_assign; j++){		
<u>Num_CID</u>	<u>2bits</u>	
For ( i=0; i <Num_CID; i++){		
<u>CID</u>	<u>16bits</u>	<u>SS basic CID</u>
<u>UIUC</u>	<u>4bits</u>	
<u>Matrix_Indicator</u>	<u>2 bits</u>	<u>For dual transmission capable MSS</u> <u>00 : STTD</u> <u>01 : SM</u>  <u>For Collaborative SM capable MSS with 2-antenna</u> <u>00: Matrix A</u> <u>01: Matrix B</u> <u>10: Matrix C</u> <u>11: Reserved</u>
<u>MIMO_SM_Control</u>	<u>2 bits</u>	<u>For Collaborative SM capable MSS</u> <u>00: pilot pattern A</u> <u>01: pilot pattern B</u>  <u>For Collaborative SM capable MSS with 2-antenna</u> <u>00 : pilot pattern C/D</u> <u>01 : pilot pattern E/F</u>  <u>10~11: Reserved</u>
}		
<u>Duration</u>	<u>10bits</u>	<u>In OFDMA slots (see 8.4.3.1)</u>
}		
}		

#### Num\_assign

This field specifies the number of assignments in this IE.

#### MIMO SM Control

This field specifies the MIMO mode of UL burst. For a dual transmission capable MSS the value of 00 indicates STTD mode, the value of 01 indicates SM mode; For a collaborative SM capable MSS, the value of 00 indicates pilot pattern A, the value of 01 indicates pilot pattern B; For a collaborative SM capable MSS with 2-antenna, the value of 00 indicates pilot pattern C/D, the value of 01 indicates pilot pattern E/F.

*[Add a new section 8.4.8.1.5.1]*

#### 8.4.8.1.5.1 Uplink using enhanced STC

A user supporting transmission using STC configuration in the uplink, shall use a modified uplink tile, 2-transmit diversity data or 2-transmit spatial multiplexing data can be mapped onto each subcarrier, the mandatory tile shall be modified to accommodate those configurations. Figure yyy depicts the UL tiles for enhanced STC transmission in PUSC mode.

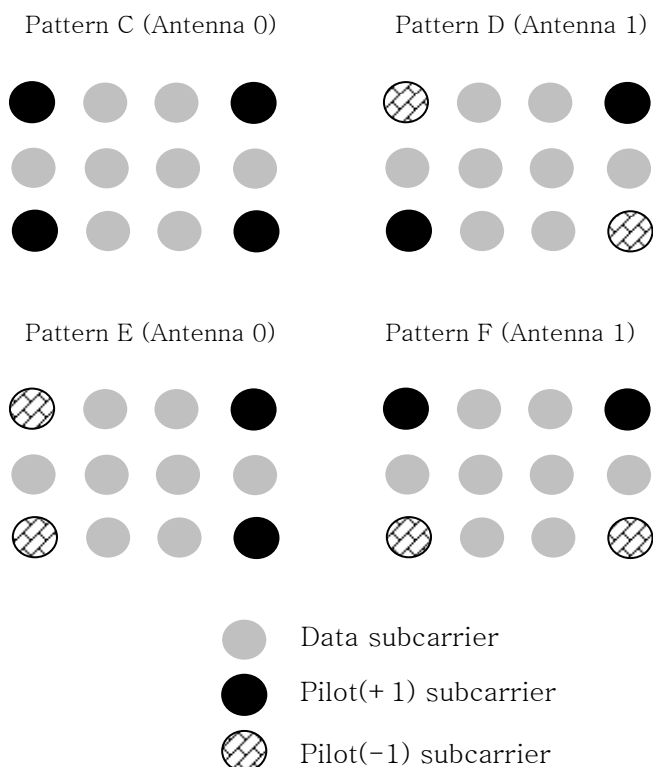


Figure yyy – MIMO tile in UL PUSC mode

Two SS's of one or two transmission antenna can perform collaborative spatial multiplexing onto the same subchannel. In this case, each SS should use the uplink tile with the pilot pattern indicated in MIMO\_UL\_Enhanced\_IE. A dual transmit antenna SS can use the allocation in STTD, SM or collaborative SM mode with other SS. SS in collaborative SM mode with dual transmit antenna sends data in ordinary STC configurations as in section 8.4.8.1.4 using the pilot pattern pair indicated in MIMO\_UL\_Enhanced\_IE. The first pilot pattern in each pair is for antenna 0 and the second is for antenna 1.

*[Add the following sentence at the end of section 8.4.8.4.3 Transmission schemes for 2-antenna MSS in UL. Line 65, page244]*

For two dual antenna MSSs to share the same subchannel, the matrix A, B and C for 4-antenna BS in section 8.4.8.3.5 may be used.