

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Clarification on the allocation for beamformed pilots</b>	
Date Submitted	<b>2005-01-11</b>	
Source(s)	Qinghua Li, Xintian Eddie Lin, Nageen Himayat, Minnie Ho, Randall Schwartz, Jose Puthenkulam <b>Intel Corporation</b>	<a href="mailto:qinghua.li@intel.com">qinghua.li@intel.com</a> Voice: +1-408-765-9698
Re:		
Abstract	Clarification on the allocation for beamformed pilots	
Purpose	Adoption of proposed changes into P802.16e <del>Crossed out indicates deleted text,</del> <u>underlined blue indicates new text change to the Standard</u>	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) &lt;<a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a>&gt;, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."</p> <p>Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair &lt;<a href="mailto:r.b.marks@ieee.org">mailto:r.b.marks@ieee.org</a>&gt; as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site &lt;<a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a>&gt;.</p>	

# Clarification for the Allocation of Beamformed Pilots

*Qinghua Li and Xintian Eddie Lin*  
**Intel Corporation**

## 1 Introduction

Dedicated pilot for MIMO beamforming mode is accepted by the D5a standard in November meeting. The dedicated pilots are beamformed to send enhanced training signals for the beamformed spatial channels to one or multiple subscriber stations, and other unintended stations usually can not receive them correctly. According to section 8.4.8.3.1 in D5a, a pilot has to be assigned for each BS antenna. However, this is not necessary and efficient for the dedicated pilot case defined in section 8.4.5.3.4 because only the beamformed spatial channel carrying data needs a pilot. For example, a 4x2 link with 4 BS transmit antennas and 2 SS receive antennas can send at most 2 spatial streams. The BS doesn't need to send pilots for its 4 antennas while it employs dedicated pilots for the beamformed spatial channels. Therefore, the BS only need to send pilots for at most 2 (rather than 4) spatial channels using the pilot allocation defined in section 8.4.8.3.1. This not only reduces pilot overhead but also improves channel estimation at the SS. An example is shown in Figure 1.

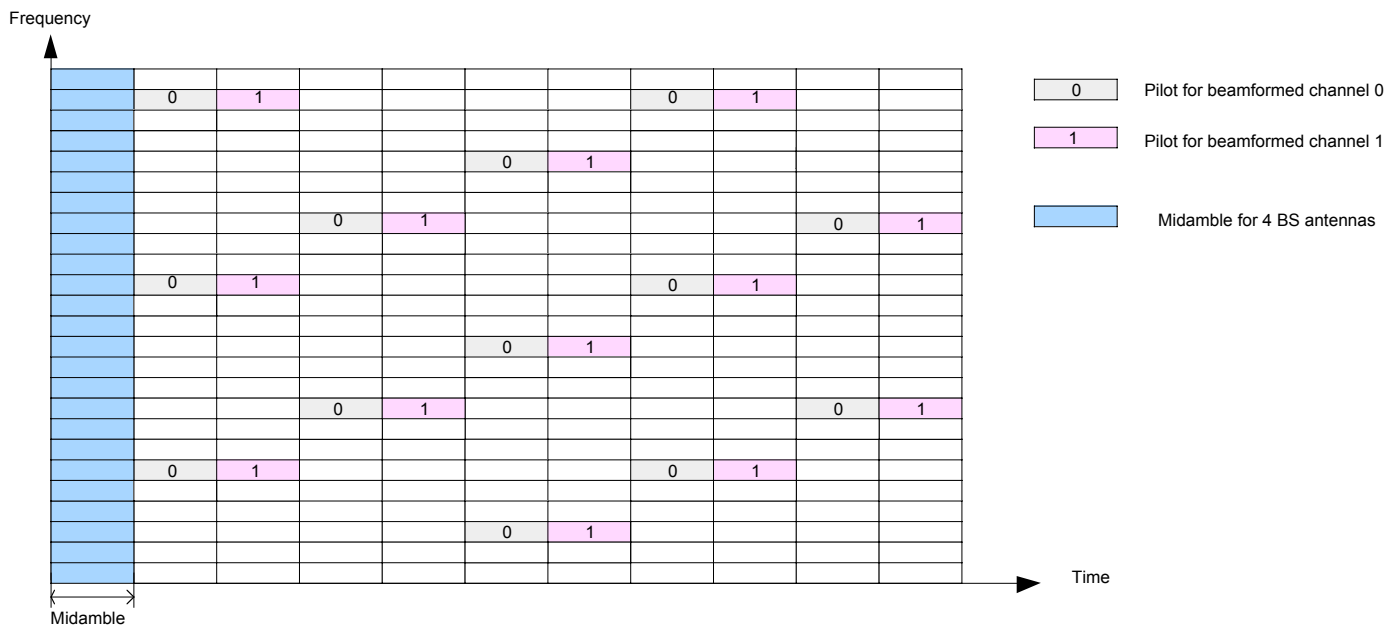


Figure 1 Illustration of a non-beamformed midamble from 4 BS antennas and beamformed pilots for 2 spatial channels.

## 2 Specific Text Changes

*Added at the end (i.e., line 45) in section 8.4.5.3.4 on page 237 of [1] as follows*

When the data allocations are transmitted over m beamformed spatial channels and the Dedicated Pilots bit is set to 1, the dedicated pilots are sent only over the m beamformed spatial channels that carry data.

***References:***

[1] IEEE P802.16e/D5a Air Interface for Fixed and Mobile Broadband Wireless Access Systems – Amendment for Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands, 2004.