

Sub-frame Level Sleep Motivation and Design Considerations

Document Number: IEEE S80216m-09/0490r1

Date Submitted: 2009-02-27

Source: Aran Bergman, Maruti Gupta, Shantidev Mohanty, Muthaiah Venkatachalam, Sassan Ahmadi
Intel Corporation

Voice: +1-408-765-1866

Email: shantidev.mohanty@intel.com

Venue: IEEE 802.16m-08/033 "Call for Comments on Project 802.16m System Description Document (SDD)",

Base Contribution: IEEE C80216m-09/0490r1

Purpose: to be discussed and adopted by TGm for the 802.16m SDD

Notice:

This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and

<<http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <<http://standards.ieee.org/board/pat/pat-material.html>> and

<<http://standards.ieee.org/board/pat>>.


Current Suggestion

- The current 16m draft supports **frame** granularity for Sleep.
- Original motivation is not clear
 - 16e supports frame granularity, as this is the basic scheduling timeslot. It is not clear why this was not followed in 16m.

VoIP Scenario


– Assumptions

- 20ms interarrival time
- MS requires to receive a single DL subframe to receive the VoIP packet and HARQ feedback and 1 UL subframe to transmit HARQ feedback and send HARQ information.
- DL:UL = 4:4 (subframes).

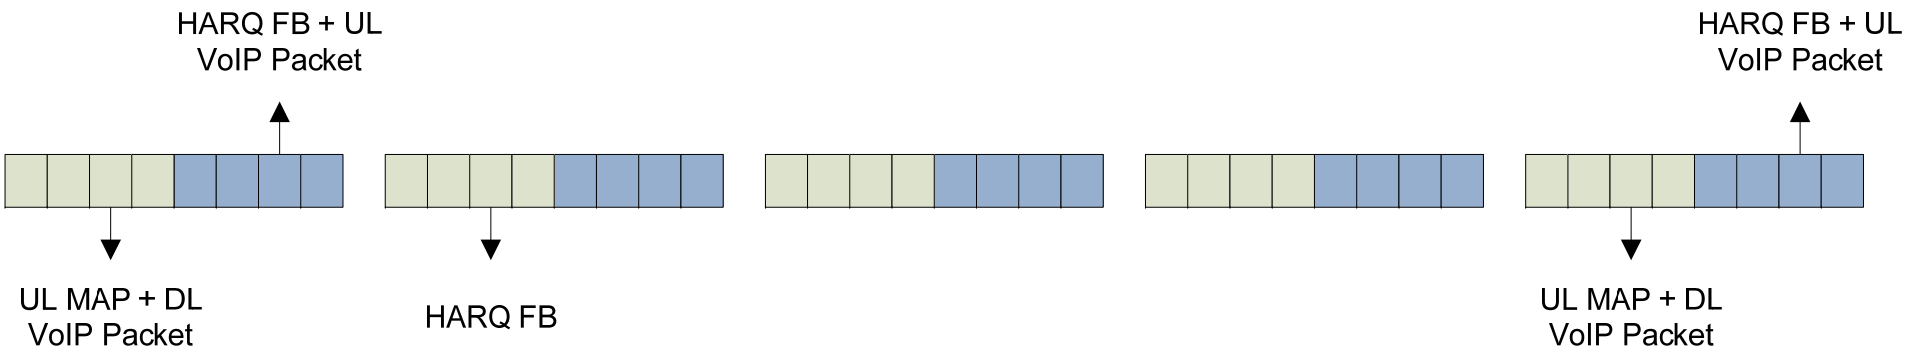


Possible 16m Timeline – Frame Sleep

- Best case scenario (no retransmissions) → sleep 50% of the subframes

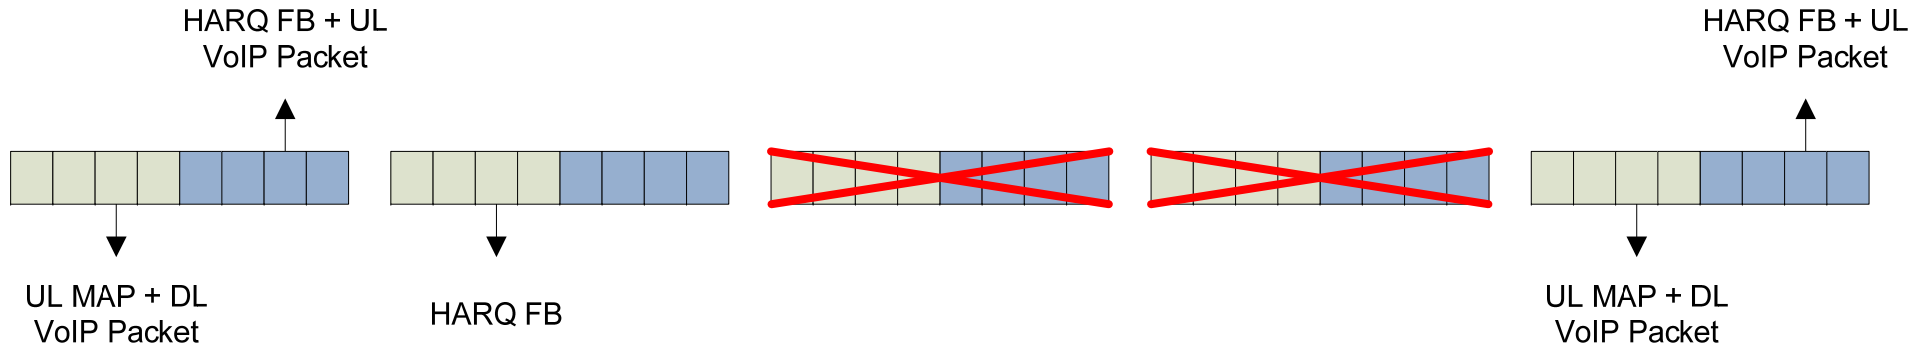

Possible 16m Timeline – Subframe Sleep

- Best case scenario → Sleep 29/32 = ~**90%** of the subframes
- Power consumption reduction of ~**54%** (if we assume 5X active power over sleep power per subframe)

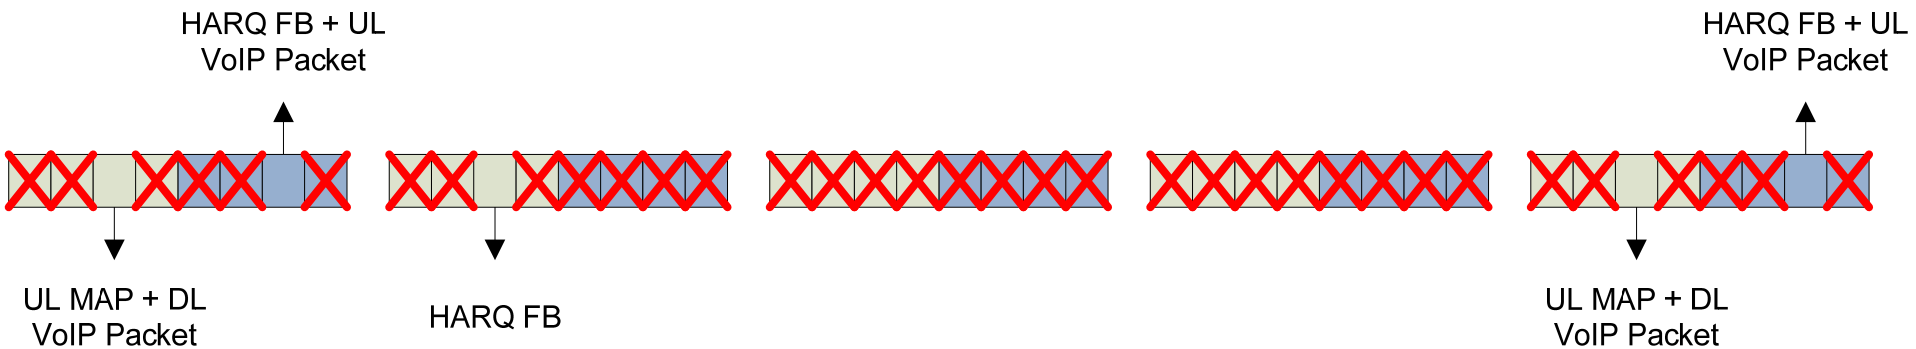

Conclusions

- Supporting Sleep with granularity of subframes is extremely important to further reduce MS's power consumption and thus increase its battery lifetime which is **a major requirement for a 16m MS**.
 - Also required to be competitive to LTE devices.
- HARQ timing and UL MAP relevance should also be considered to enable this tight sleep pattern.
- MS should not be forced to wake up on a superframe boundary to receive the SFH, since it can assume SFH will not be changed in most cases (MAP should include an indication of any change).