

Project	<b>IEEE 802.20 Working Group on Mobile Broadband Wireless Access</b> <b><a href="http://grouper.ieee.org/groups/802/20">http://grouper.ieee.org/groups/802/20</a></b>	
Title	<b>Requirements: Selected topics, including MAC+PHY aggregate capacity</b>	
Date Submitted	<b>2003-05-05</b>	
Source(s)	Marianna Goldhammer Tel Aviv, HaBarzel 21  Israel	Voice: +972 3 645 6241 Fax: Email: <a href="mailto:marianna.goldhammer@alvarion.com">marianna.goldhammer@alvarion.com</a>
Re:	MBWA Call for Contributions 802.20-03/09	
Abstract		
Purpose	The scope of this contribution is to improve the 802.20 Requirement document, Ver. 3.	
Notice	This document has been prepared to assist the IEEE 802.20 Working Group. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.20.	
Patent Policy	The contributor is familiar with IEEE patent policy, as outlined in <a href="http://standards.ieee.org/guides/opman/sect6.html#6.3">Section 6.3 of the IEEE-SA Standards Board Operations Manual</a> < <a href="http://standards.ieee.org/guides/opman/sect6.html#6.3">http://standards.ieee.org/guides/opman/sect6.html#6.3</a> > and in <i>Understanding Patent Issues During IEEE Standards Development</i> < <a href="http://standards.ieee.org/board/pat/guide.html">http://standards.ieee.org/board/pat/guide.html</a> >.	

## **Requirements: Selected topics, including MAC+PHY aggregate capacity**

*Marianna Goldhammer, Alvarion*

### **1 Introduction**

The scope of this contribution is to improve the 802.20 Requirement document, Ver. 3.

1. The requirements are classified in 3 categories, according to SHALL-MUST, SHOULD and MAY, to differentiate between essential and other requirements.
2. It is proposed an 802.20 Reference Model, access specific instead of WLAN specific.
3. The Version 3 of the document provides a fairly good system description, but not emphasizes enough PHY and MAC protocol requirements. As consequence, there is some confusion area between product requirements, system requirements and PHY-MAC requirements. This contribution proposes numerical performance targets (as resulting from 802.16d/e drafts), specific for PHY+MAC interface to upper layers. For simplicity sake, the performance targets are defined as function of payload size, rather than specific services, and are given at specific modulations and coding overheads, speeds and cell sizes.
4. Some other topics include issues as: statistical multiplexing, TDD/FDD, link-budget, channel models, etc.
5. All the proposed changes are highlighted, being included in-text.

IEEE P 802.20™/PD<insert PD Number>/V<insert version number>

Date: <July 10.2003>

## Draft 802.20 Permanent Document

### ◀802.20 Requirements Document ▶

This document is a Draft Permanent Document of IEEE Working Group 802.20. Permanent Documents (PD) are used in facilitating the work of the WG and contain information that provides guidance for the development of 802.20 standards. This document is work in progress and is subject to change.

Contents

1 Overview.....9

1.1 Scope.....9

1.2 Purpose.....9

1.3 PAR Summary.....9

1.4 Conventions .....10

2 Overview of Services and Applications .....11

2.1 Voice Services .....11

2.2 System Architecture .....12

2.2.1 MBWA-Specific Reference Model .....12

2.3 Definition of Interfaces .....15

3 Functional and Performance Requirements.....15

Sector Aggregate Data Rates – Downlink & Uplink.....15

3.2 Spectral Efficiency.....17

3.2.1 bps/Hz/sector.....17

3.2.2 Protocol efficiency .....17

OS.....17

3.4 Number of Simultaneous Sessions .....18

3.5 Packet Error Rate .....18

3.6 Link Budget.....18

3.7 Receiver sensitivity.....18

3.8 Link Adaptation and Power Control.....18

3.9 Max tolerable delay spread Performance under mobility.....19

3.10 Mobility.....19

3.11 Security .....19

3.12 Access Control.....19

3.13 Privacy Methods .....19

- 3.14 User Privacy ..... 19
- 3.15 Denial of Service Attacks ..... 19
  - 3.15.1 Security Algorithm ..... 20
- 3.16 OA&M ..... 20
- 3.17 Link Adaptation, Power Control, and Dynamic Bandwidth Allocation ..... 20
- Duplexing modes and Channel Plans ..... 20
- 3.19 Signaling Requirements ..... 21
- 3.20 Handoff Support ..... 21
  - 3.20.1 Soft Handoff ..... 21
  - 3.20.2 Hard Handoff ..... 21
  - 3.20.3 IP-Level Handoff ..... 21
  - 3.20.4 Duplexing – FDD & TDD ..... 21
  - 3.20.5 Channel Characteristics ..... 21
  - 3.20.6 Adaptive Modulation and Coding ..... 21
  - 3.20.7 Layer 1 to Layer 2 Inter-working ..... 21
  - 3.20.8 Hooks for Support of Multi Antenna Capabilities ..... 21
- 3.21 Layer 2 MAC ..... 22
  - 3.21.1 MAC Modes of Operation (needs detail or it will be eliminated) ..... 22
  - 3.21.2 Scheduler ..... 22
- 3.22 Quality of Service and The MAC ..... 22
  - 3.22.1 Cos/QoS Matched-Criteria (needs detail or it will be eliminated) ..... 22
  - 3.22.2 CoS/QoS Enforcement (needs detail or it will be eliminated) ..... 22
  - 3.22.3 ARQ/Retransmission (needs detail or it will be eliminated) ..... 22
  - 3.22.4 MAC Error Performance (needs detail or it will be eliminated) ..... 23
  - 3.22.5 Latency (needs detail or it will be eliminated) ..... 23
  - 3.22.6 Protocol Support (needs detail or it will be eliminated) ..... 23
  - 3.22.7 Addressing (needs detail or it will be eliminated) ..... 23
  - 3.22.8 Support/Optimization for TCP/IP (needs detail or it will be eliminated) ..... 23

- 3.22.9 MAC Complexity Measures..... 23
- 3.22.10 Additional IP Offerings(needs detail or it will be eliminated) ..... 23
- 3.23 Layer 3+ Support ..... 23
  - 3.23.1 OA&M Support (needs detail or it will be eliminated) ..... 23
- 3.24 User State Transitions ..... 23
- 3.25 Resource Allocation ..... 23
- 3.26 Latency..... 23
- 4 References..... 24
- Appendix A Definition of Terms and Concepts ..... 25
- Appendix B Unresolved issues..... 28
- 1 Overview..... 5
  - 1.1 Scope..... 5
  - 1.2 Purpose..... 5
  - 1.3 PAR Summary..... 5
- 2 Overview of Services and Applications ..... 6
  - 2.1 Voice Services ..... 7
- 3 System Reference Architecture ..... 7
  - 3.1 System Architecture ..... 7
    - 3.1.1 MBWA Specific Reference Model ..... 8
  - 3.2 Definition of Interfaces ..... 9
- 4 Functional and Performance Requirements..... 9
  - 4.1 System Aggregate Data Rates Downlink & Uplink..... 9
  - 4.2 Spectral Efficiency (bps/Hz/sector)..... 10
  - 4.3 QOS ..... 11
  - 4.4 Number of Simultaneous Sessions ..... 11
  - 4.5 Packet Error Rate ..... 11
  - 4.6 Link Budget..... 11
  - 4.7 Receiver sensitivity ..... 12

- 4.8—Link Adaptation and Power Control ..... 12
- 4.9—Max tolerable delay spread Performance under mobility ..... 12
- 4.10—Mobility ..... 12
- 4.11—Security ..... 12
- 4.12—Access Control ..... 12
- 4.13—Privacy Methods ..... 13
- 4.14—User Privacy ..... 13
- 4.15—Denial of Service Attacks ..... 13
  - 4.15.1—Security Algorithm ..... 13
- 4.16—OA&M ..... 13
- 4.17—Link Adaptation, Power Control, and Dynamic Bandwidth Allocation ..... 13
- 4.18—Spectral Requirements ..... 13
- 4.19—Signaling Requirements ..... 14
- 4.20—Handoff Support ..... 14
  - 4.20.1—Soft Handoff ..... 14
  - 4.20.2—Hard Handoff ..... 14
  - 4.20.3—IP Level Handoff ..... 14
  - 4.20.4—Duplexing—FDD & TDD ..... 14
  - 4.20.5—Channel Characteristics ..... 14
  - 4.20.6—Adaptive Modulation and Coding ..... 14
  - 4.20.7—Layer 1 to Layer 2 Inter working ..... 14
  - 4.20.8—Hooks for Support of Multi-Antenna Capabilities ..... 14
- 4.21—Layer 2 MAC ..... 15
  - 4.21.1—MAC Modes of Operation (needs detail or it will be eliminated) ..... 15
  - 4.21.2—Scheduler ..... 15
- 4.22—Quality of Service and The MAC ..... 16
  - 4.22.1—Cos/QoS Matched Criteria (needs detail or it will be eliminated) ..... 16
  - 4.22.2—CoS/QoS Enforcement (needs detail or it will be eliminated) ..... 16

{July 10, 2003}

IEEE P802.20 PD<number>/V<number>

4.22.3	ARQ/Retransmission (needs detail or it will be eliminated)	16
4.22.4	MAC Error Performance (needs detail or it will be eliminated)	16
4.22.5	Latency (needs detail or it will be eliminated)	16
4.22.6	Protocol Support (needs detail or it will be eliminated)	16
4.22.7	Addressing (needs detail or it will be eliminated)	16
4.22.8	Support/Optimization for TCP/IP (needs detail or it will be eliminated)	16
4.22.9	MAC Complexity Measures	16
4.22.10	Additional IP Offerings (needs detail or it will be eliminated)	17
4.23	Layer 3+ Support	17
4.23.1	OA&M Support (needs detail or it will be eliminated)	17
4.24	User State Transitions	17
4.25	Resource Allocation	17
4.26	Latency	17
5	References	17
Appendix A	Definition of Terms and Concepts	19
Appendix B	Unresolved issues	22



1 **1.2 Overview**

2 **1.2.1 Scope**

3 For the purpose of this document, an “802.20 system” constitutes an 802.20 MAC and  
4 PHY implementation in which at least one subscriber station communicates with a base  
5 station via a radio air interface, and the interfaces to external networks, for the purpose of  
6 transporting IP services through the MAC and PHY protocol layers. This document  
7 defines system requirement for the IEEE 802.20 standard development project. These  
8 requirements are consistent with the PAR document (see section 1.3 below) and shall  
9 constitute the top-level specification for the 802.20 standard.

10 **1.2.2 Purpose**

11 This document will establish the detailed requirements for the Mobile Broadband  
12 Wireless Access (MBWA) systems for which the 802.20 PHY and MAC layers shall  
13 form the lower protocol layers.

14 **1.2.3 PAR Summary**

15 The scope of the PAR (listed in Item 12) is as follows:

16

17 *“Specification of physical and medium access control layers of an air interface*  
18 *for interoperable mobile broadband wireless access systems, operating in*  
19 *licensed bands below 3.5 GHz, optimized for IP-data transport, with peak data*  
20 *rates per user in excess of 1 Mbps. It supports various vehicular mobility classes*  
21 *up to 250 Km/h in a MAN environment and targets spectral efficiencies, sustained*  
22 *user data rates and numbers of active users that are all significantly higher than*  
23 *achieved by existing mobile systems.”*

24

25 In addition, a table (provided in Item 18) lists “additional information on air interface  
26 characteristics and performance targets that are expected to be achieved.”

27

<i>Characteristic</i>	<i>Target Value</i>
<i>Mobility</i>	<i>Vehicular mobility classes up to 250 km/hr (as defined in ITU-R M.1034-1)</i>
<i>Sustained spectral efficiency</i>	<i>&gt; 1 b/s/Hz/cell</i>

<i>Peak user data rate (Downlink (DL))</i>	<i>&gt; 1 Mbps*</i>
<i>Peak user data rate (Uplink (UL))</i>	<i>&gt; 300 kbps*</i>
<i>Peak aggregate data rate per cell (DL)</i>	<i>&gt; 4 Mbps*</i>
<i>Peak aggregate data rate per cell (UL)</i>	<i>&gt; 800 kbps*</i>
<i>Airlink MAC frame RTT</i>	<i>&lt; 10 ms</i>
<i>Bandwidth</i>	<i>e.g., 1.25 MHz, 5 MHz</i>
<i>Cell Sizes</i>	<i>Appropriate for ubiquitous metropolitan area networks and capable of reusing existing infrastructure.</i>
<i>Spectrum (Maximum operating frequency)</i>	<i>&lt; 3.5 GHz</i>
<i>Spectrum (Frequency Arrangements)</i>	<i>Supports FDD (Frequency Division Duplexing) and TDD (Time Division Duplexing) frequency arrangements</i>
<i>Spectrum Allocations</i>	<i>Licensed spectrum allocated to the Mobile Service</i>
<i>Security Support</i>	<i>AES (Advanced Encryption Standard)</i>

1

2 \* Targets for 1.25 MHz channel bandwidth. This represents 2 x 1.25 MHz (paired)  
 3 channels for FDD and a 2.5 MHz (unpaired) channel for TDD. For other bandwidths, the  
 4 data rates may change.

5 **2.4 Conventions**

6 Throughout this document, the words that are used to define the significance of particular  
 7 requirements are capitalized. These words are:

8 “MUST” or “SHALL” These words or the adjective "REQUIRED" means that the item is  
 9 an absolute requirement.

10 “MUST NOT” This phrase means that the item is an absolute prohibition.

11 “SHOULD” This word or the adjective “RECOMMENDED” means that there may exist  
 12 valid reasons in particular circumstances to ignore this item, but the full implications  
 13 should be understood and the case carefully weighed before choosing a different course.

1 “SHOULD NOT” This phrase means that there may exist valid reasons in particular  
2 circumstances when the listed behavior is acceptable or even useful, but the full  
3 implications should be understood and the case carefully weighed before implementing  
4 any behavior described with this label.

5 “MAY” This word or the adjective “OPTIONAL” means that this item is truly optional.  
6 One implementation may include the item because the target marketplace requires it or  
7 because it enhances the product, for example; another implementation may omit the same  
8 item.

## 9 **23 Overview of Services and Applications**

10  
11 The 802.20 Air-Interface (AI) ~~should~~-**SHALL** be optimized for high-speed IP-based data  
12 services operating on a distinct data-optimized RF channel. The AI ~~should~~-**SHALL**  
13 provide for compliant Mobile Terminal (MT) devices for mobile users, and ~~should~~  
14 **SHALL** enable significantly improved performance relative to other systems targeted for  
15 wide-area mobile operation. The AI ~~should~~-**SHALL** be designed to provide significantly  
16 improved performance attributes as compared with existing IEEE 802 mobile access  
17 standards (IEEE 802.16) and /or existing 3GGP, 3GPP2, etc. standards. Examples of such  
18 parameters are: ~~such as~~ peak and sustained data rates and corresponding spectral  
19 efficiencies, system user capacity, air- interface and end-to-end latency, overall network  
20 complexity and quality-of-service management. Applications that require the user device  
21 to assume the role of a server, in a server-client model, ~~shall~~-**SHALL** be supported as  
22 well.

23 • **Applications:** The AI ~~all- should~~-**SHALL** support interoperability between an IP Core  
24 Network and IP enabled mobile terminals and applications ~~shall-that~~ conform to open  
25 standards and protocols. This allows applications including, but not limited to, full  
26 screen, full graphic web browsing, e- mail, file upload and download without size  
27 limitations (e.g., FTP), video and audio streaming, IP Multicast, Telematics, Location  
28 based services, VPN connections, VoIP, instant messaging and on- line multiplayer  
29 gaming.

30 .  
31 • **Always on:** The AI ~~should~~-**SHOULD** provide the user with “always-on” connectivity.  
32 The connectivity from the wireless MT device to the Base Station (BS) ~~should~~-**SHALL** be  
33 automatic and transparent to the user.

### 34 **2.13.1 Voice Services**

35 Voice Services are currently among the most profitable services available to the cellular  
36 and PCS service providers. These services are highly optimized to provide high quality at  
37 very minimal cost to provide. It is expected that MBWA will need to make some  
38 accommodation to provide voice services as an integral part of any service offering.

{July 10, 2003}

IEEE P802.20-PD<number>/V<number>

1 The MBWA system ~~should~~ **SHALL** accommodate VOIP services by providing QOS that  
2 provides latency, jitter, and packet loss characteristics that enable the use of industry  
3 standard Codec's. When the required QOS cannot be reserved the system ~~will~~ **MAY**  
4 provide signaling to support call blocking. ~~The MAC should provide call blocking for~~  
5 ~~supported formats. (note: this function is not related to MAC)~~

6 System Reference Architecture

### 7 **3.13.2 System Architecture**

8 The 802.20 systems ~~will~~ **SHALL** be designed to provide ubiquitous mobile broadband  
9 wireless access in a cellular architecture. The system architecture ~~will~~ **SHALL** be a point  
10 to multipoint system that works from a base station to multiple devices in a non-line of  
11 sight outdoor to indoor scenario. The system will be designed to enable a macro-cellular  
12 architecture with allowance for indoor penetration in a dense urban, urban, suburban and  
13 rural environment.

14 The AI ~~shall~~ **SHALL** support a layered architecture and separation of functionality  
15 between user, data and control planes. The AI ~~must~~ **MUST** efficiently convey bi-  
16 directional packetized, bursty IP traffic with packet lengths and packet train temporal  
17 behavior consistent with that of wired IP networks. The 802.20 AI ~~shall~~ **SHALL** support  
18 high-speed mobility.

19 System Context Diagram

20 This section presents a high-level context diagram of the MBWA technology, and how  
21 such technology will "fit into" the overall infrastructure of the network. It should include  
22 data paths, wired network connectivity, AAA functionality as necessary, and inter-system  
23 interfaces. Major System Interfaces should be included in this diagram.

#### 24 **3.1.13.2.1 MBWA-Specific Reference Model**

25 To aid the discussion in this document and in the 802.20 specifications, a straw man  
26 Reference Partitioning of the 802.20 functionality is shown in Figure 1. This reference  
27 partitioning model is similar to those used in other 802 groups.

28 The 802.20 reference model consists of two major functional layers, the Data Link Layer  
29 (DLL) and the Physical Layer (PHY).


30  
31 The MAC comprises three sublayers. The Service Specific Convergence Sublayer (CS) provides any  
32 transformation or mapping of external network data, received through the CS service access point (SAP),  
33 into MAC SDUs (Service Data Unit) received by the MAC Common Part Sublayer (MAC CPS) through the  
34 MAC SAP. This includes classifying external network SDUs and associating them to the proper MAC  
35 service flow and Con-nection ID. It may also include such functions as payload header suppression.  
36 Multiple CS specifications are provided for interfacing with various protocols. The internal format of the  
37 CS payload is unique to the CS, and the MAC CPS is not required to understand the format of or parse any  
38 information from the CS payload.  
39 The MAC Common Part Sublayer (CPS) provides the core MAC functionality of system access, bandwidth  
40 allocation, connection establishment, and connection maintenance. It receives data from the various CSs.

1 through the MAC SAP, classified to particular MAC connections. QoS is applied to the transmission and  
 2 scheduling of data over the physical layer.  
 3 The MAC also contains a separate Security Sublayer providing authentication, secure key exchange, and  
 4 encryption.  
 5 Data, physical layer control, and statistics are transferred between the MAC CPS and the physical layer  
 6 (PHY) via the PHY SAP.

7 The Data Link Layer is functionally responsible for a mobile station's method of gaining  
 8 access to the over-the-air resource. The Data Link Layer consists of the MAC Sub layer,  
 9 and the MAC Management Sub layer. The MAC Sub layer is responsible for the proper  
 10 formatting of data, as well as requesting access to the over-the-air resource. The MAC  
 11 Management Sub layer is responsible for provisioning of MAC Layer Parameters and the  
 12 extraction of MAC monitoring information, which can be of use in network management.

13 The Physical Layer consists of the Physical Layer Convergence Protocol, the Physical  
 14 Medium Dependent, and the Physical Layer Management Sub layers. The Physical Layer  
 15 Convergence Protocol Sub layer is responsible for the formatting of data received from  
 16 the MAC Sub layer into data objects suitable for over-the-air transmission, and for the  
 17 deformatting of data received by the station. The Physical Medium Dependent Sub layer  
 18 is responsible for the transmission and reception of data to/from the over-the-air resource.  
 19 The Physical Layer Management sub layer is responsible for provisioning of the Physical  
 20 Layer parameters, and for the extraction of PHY monitoring information that can be of  
 21 use in network management.


22  
 23

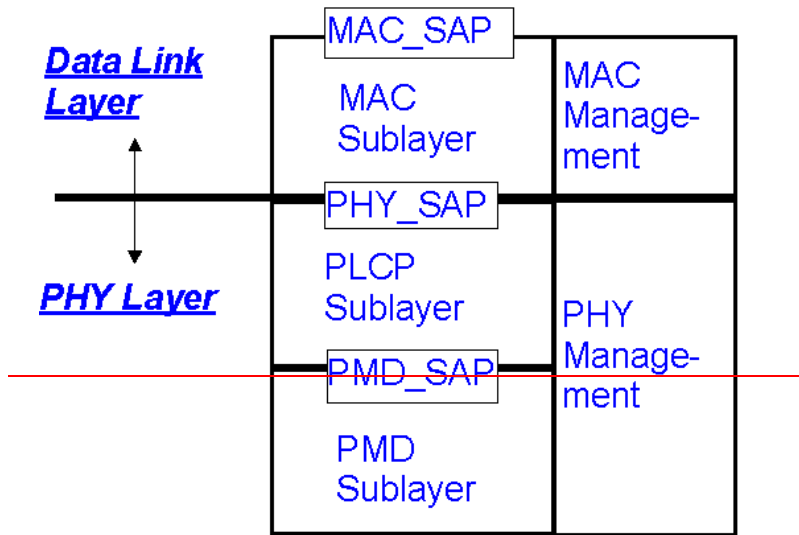

MAC\_SAP: MAC Service Access Point  
 PHY\_SAP: PHY Service Access Point  
 PLCP: PHY Layer Convergence Protocol, contains FEC  
 PMD: Physical Medium Dependent (radio)

24

1  
2

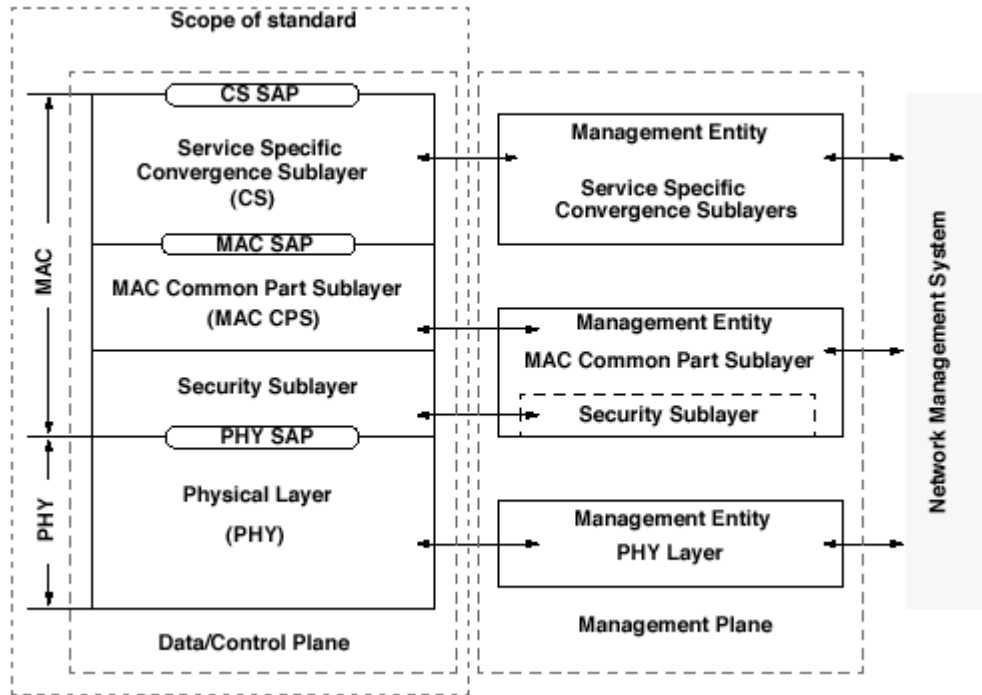

3  
4  
5  
6  
7  
8  
9

**Figure 1—802.20 protocol layering, showing service access points (SAPs)**

Figure 1—Reference partitioning

10  
11  
12  
13  
14  
15

**3.3 IEEE 802 Compatibility**

The AI protocols SHALL be in conformance with the IEEE 802.1 Architecture, Management and Interworking documents as follows: 802 Overview and Architecture, 802.1D, 802.1Q and parts of 802.1f. If any variances in conformance emerge, they SHALL be thoroughly disclosed and reviewed with 802.

1 **3.23.4 Definition of Interfaces**

2 **Open interfaces:** The AI ~~shall~~**SHOULD** support open interfaces between the base  
 3 station and any upstream network entities. Any AI interfaces that may be implemented  
 4 ~~shall~~**SHALL** use IETF protocols as appropriate.

5 **4 Functional and Performance Requirements**

6 **4.1 ~~System Sector~~ Aggregate Data Rates – Downlink & Uplink**

7  
 8 ~~Consistent with the 802.20 PAR, tables 1 and 2 define the required air interface data rates~~  
 9 ~~and capacity characteristics.~~

10 ~~The 802.20 PHY and MAC+PHY performance SHALL be better than the performance~~  
 11 ~~specified in Table 1, adding an improvement of 30% (to over-perform 802.16).~~

12 ~~Due to the fact that this standard defines mainly PHY and MAC specifications, the~~  
 13 ~~requirements are defined for the PHY and PHY+ system interfaces, and not at the system~~  
 14 ~~level.~~

15  
 16 Table 1 – ~~Information Data Rates and Aggregated~~ Capacity Requirements for 1.25 MHz  
 17 channel-

18

Description	Downlink <u>Level</u>		Uplink <u>Level</u>	
	<u>PHY</u>	<u>MAC+ PHY</u>	<u>PHY</u>	<u>MAC+ PHY</u>
Outdoor Peak Data Rate <sup>1</sup> , 1518 bytes payload, min. 40 users, 64QAM rate ¾ or equivalent, at max. cell size	4.5M bps	3-3.8Mbps	4.5Mbps	3-3.6 Mbps
<u>Outdoor Peak Data Rate<sup>1</sup>, 40bytes payload (VoIP, etc.), min. 40users, 64QAM rate ¾ or equivalent, at max. cell size</u>		3.2Mbps		2.5Mbps
Outdoor Average Data Rate <sup>2</sup> , 1518 bytes payload, min. 25 users, 16QAM rate ¾ or equivalent, at max. cell size, 100km/h, ITU-R Vehicular Channel A	2.7 Mbps	1-2.4 Mbps/Seet or	2.7Mbps	1-2 Mbps/Seete or
<u>Outdoor Average Data Rate<sup>2</sup></u>		2.1Mbps		1.6 Mbps
<u>Outdoor Peak Data Rate<sup>1</sup>, 40bytes payload (VoIP, etc.), min. 25 users, 64QAM rate ¾ or equivalent, at max. cell size, 100km/h, ITU-R Vehicular Channel A</u>				
Indoor Peak Data Rate <sup>3</sup>		3-4Mbps/Seeter		3-4Mbps/Seete or

19 Table 2 – ~~Information Data Rates and Aggregated~~ Capacity Requirements for 5 MHz  
 20 channel.

1

Description	Downlink	Uplink
Outdoor Peak Data Rate <sup>1</sup>	9 Mbps	9 Mbps
Outdoor Average Data Rate <sup>2</sup>	3 Mbps/Sector	3 Mbps/Sector
Indoor Peak Data Rate <sup>3</sup>	9 Mbps/Sector	9 Mbps/Sector

2

3

Description	Downlink		Uplink	
	PHY	MAC+ PHY	PHY	MAC+ PHY
Outdoor Peak Data Rate <sup>1</sup> , 1518 bytes payload, min. 100 users, 64QAM rate ¾ or equivalent, at max. cell size	17Mbps	15Mbps	17Mbps	14.3Mbps
Outdoor Peak Data Rate <sup>1</sup> , 40bytes payload (VoIP, etc.), min. 100users, 64QAM rate ¾ or equivalent, at max. cell size		14Mbps		2.5Mbps
Outdoor Average Data Rate <sup>2</sup> , 1518 bytes payload, min. 100 users, 16QAM rate ¾ or equivalent, at max. cell size, 100km/h, ITU-R Vehicular Channel A	10.3 Mbps	9 Mbps	10.3Mbps	8.6 Mbps
Outdoor Average Data Rate <sup>2</sup> Outdoor Peak Data Rate <sup>1</sup> , 40bytes payload (VoIP, etc.), min. 100 users, 64QAM rate ¾ or equivalent, at max. cell size, 100km/h, ITU-R Vehicular Channel A		9Mbps		6.5Mbps
Indoor Peak Data Rate <sup>3</sup>	17Mb/s		17Mb/s	

4

5

6

7

8

9

10

11

12

13

14

15

16

17

Foot notes to tables 1 and 2:

In an aggregate 1.25 MHz channel bandwidth, the AI shall support peak aggregate data rate (user payload) per cell in excess of 4 Mbps in the downlink and in excess of 800 Kbps in the uplink. In wider channels, the data rates shall be proportionate. “Outdoor Peak Data Rate” is defined as the maximum instantaneous information data rate available to any given user in a mobile application.<sup>2</sup> “Outdoor Average Data Rate” is defined as the system-wide average information data rate available per sector in a fully loaded system with all users moving at average vehicular speed, with a ITU-T Vehicular A channel model.

<sup>3</sup> “Indoor Peak Data Rate” is defined as the maximum instantaneous data rate available to any given indoor user moving at pedestrian speed.

18

User Data Rates - – Downlink & Uplink

19



1 The AI ~~shall~~**SHALL** support peak per-user data rates in excess of 1 Mbps on the  
2 downlink and in excess of 300 kbps on the uplink, for 1.25MHz channel and 4Mbs  
3 downlink and 1Mb/s up-link for 5MHz channel. These peak data rate targets are  
4 independent of channel conditions, traffic loading, and system architecture. The peak per  
5 user data rate targets are less than the peak aggregate per cell data rate to allow for design  
6 and operational choices.

## 7 **4.2 Spectral Efficiency**

### 8 **4.2.1 bps/Hz/sector**

9 Sustained spectral efficiency shall be in excess of 1 b/s/Hz/cell in a loaded network.  
10 Sustained spectral efficiency is computed in a network setting. It is defined as the ratio of  
11 the expected aggregate throughput (bits/sec) to all users in an interior cell divided by the  
12 system bandwidth. The sustained spectral efficiency calculation ~~shall~~**MAY** assume that  
13 users are distributed uniformly throughout the network and shall include a specification  
14 of the minimum expected data rate/user. Additionally, the AI ~~shall~~**SHOULD** support  
15 universal frequency reuse but also allow for system deployment with frequency reuse  
16 factors of less than 1 (e.g., using spatial diversity to reuse spectrum within a cell).

17 The 802.20 PAR indicates that the MBWA technology ~~shall~~**SHALL** have a much greater  
18 spectral efficiency than “existing systems”. This section defines the fundamentals of  
19 Spectral Efficiency in terms of “achievable” and “maximum” spectral efficiency and the  
20 necessary requirements for the concept of “much greater.”

21 Spectral Efficiency: Good put

22 Downlink > 2 bps/Hz/sector

23 Uplink >1 bps/Hz/sector

### 24 **4.2.2 Protocol efficiency**

25 The AI SHALL be optimized for statistical traffic multiplexing, in both up-link and down-link.

26 For efficient packet data transmission, the MAC protocol SHALL include Header Compression support.

27 The AI protocols SHALL optimally transmit variable length IP packets.

28 Processes as Bandwidth Request, Network Entry, etc. SHALL use minimum spectrum resources.

29

## 30 **4.3 QoS**

31

32 The AI shall support the means to enable end-to-end QoS within the scope of the AI and  
33 shall support a Policy-based QoS architecture. The resolution of QoS in the AI shall be  
34 consistent with the end-to-end QoS at the Core Network level. The AI shall support IPv4  
35 and IPv6 enabled QoS resolutions, for example using Subnet Bandwidth Manager. The

1 AI shall support efficient radio resource management (allocation, maintenance, and  
2 release) to satisfy user QoS and policy requirements.

3

#### 4 **4.4 Number of Simultaneous Sessions**

5 > 100 sessions per carrier (definition of simultaneous to be provided)

#### 6 **4.5 Packet Error Rate**

7 The physical layer ~~shall~~SHALL be capable of adapting the modulation, coding, and  
8 power levels to accommodate RF signal deterioration between the BS and user terminals.  
9 The air interface ~~shall~~SHALL use appropriate ARQ schemes to ensure that error rates are  
10 reduced to a suitably low levels in order to accommodate higher level IP based protocols  
11 (for example, TCP over IP)

#### 12 **4.6 Link Budget**

13

14 The system link budget shall be ~~160-170~~>160dB for all devices and terminals at the data  
15 rates specified in the earlier ~~section, assuming best practices in terms of base station~~  
16 ~~design, user terminal design, and deployment techniques.~~

17 The PHY protocol SHALL provide maximum system gain in NON-LOS, when working  
18 with Rayleigh channels.

19 Taking into account that generally all the known PHYs may support Advanced Antenna  
20 Systems, the system gain MUST be evaluated primarily for the system using no more  
21 than one antenna, and secondary for systems including Antenna Arrays.

22 The System Gain will be evaluated taking the same assumptions for Transmitted Powers  
23 and Antenna Gains.

24

#### 25 **4.7 Receiver sensitivity**

26 Blocking and selectivity specifications ~~shall~~SHOULD be consistent with best  
27 commercial practice for mobile wide-area terminals.

#### 28 **4.8 Link Adaptation and Power Control**

29 The AI shall support automatic selection of optimized user data rates that are consistent  
30 with the RF environment constraints and application requirements. The AI ~~shall~~SHALL  
31 provide for graceful reduction or increasing user data rates, on the downlink and uplink,  
32 as a mechanism to maintain an appropriate frame error rate performance. The Radio  
33 system should provide at least 99.9% link reliability.

1 **4.9 Max tolerable delay spread Performance under mobility**

2 The system is expected to work in dense urban, suburban and rural outdoor-indoor  
3 environments and the relevant channel models should be applicable. The ~~system shall AI~~  
4 SHALL NOT be designed for indoor only and outdoor only scenarios.

5 The system SHALL have optimized performance with a variety of radio channels, taking  
6 into account the outdoor-to-indoor propagation.

7 **4.10 Mobility**

8 Support different modes of mobility from pedestrian (3 km/hr) to very high speed (250  
9 km/hr) but not optimized for only one mode. As an example, data rate gracefully degrades  
10 from pedestrian to high-speed mobility.

11 **4.11 Security**

12 Network security in MBWA systems is assumed to have goals similar to those in cellular  
13 or PCS systems. These goals are to protect the service provider from theft of service, and  
14 to protect the user's privacy and mitigate against denial of service attacks. Provision ~~shall~~  
15 SHALL be made for authentication of both base station and mobile terminal, for privacy,  
16 and for data integrity consistent with the best current commercial practice.

17

18 **4.12 Access Control**

19 A cryptographically generated challenge-response authentication mechanism for the user  
20 to authenticate the network and for the network to authenticate the user must be used.

21 **4.13 Privacy Methods**

22 A method that will provide message integrity across the air interface to protect user data  
23 traffic, as well as signaling messages from unauthorized modification will be specified.

24 Encryption across the air interface to protect user data traffic, as well as signaling  
25 messages, from unauthorized disclosure will be incorporated.

26 **4.14 User Privacy**

27 The system will prevent the unauthorized disclosure of the user identity.

28 **4.15 Denial of Service Attacks**

29 It shall be possible to prevent replay attacks by minimizing the likelihood that  
30 authentication signatures are reused.

1 It shall be possible to provide protection against Denial of Service (DOS) attacks.

2 **4.15.1 Security Algorithm**

3 The authentication and encryption algorithms shall be publicly available on a fair and  
4 non-discriminatory basis.

5 National or international standards bodies shall have approved the algorithms.

6 The algorithms ~~shall~~ have been extensively analysed by the cryptographic community to  
7 resist all currently known attacks.

8 **4.16 OA&M**

9 **4.17 Link Adaptation, Power Control, and Dynamic Bandwidth Allocation**

10 Link adaptation shall be used by the AI for increasing spectral efficiency, peak data rate,  
11 and cell coverage reliability. The AI ~~shall~~ SHALL support adaptive modulation and  
12 coding, adaptive bandwidth allocation, and adaptive power allocation.

13 **4.18 Spectral Duplexing modes and Channel Plans Requirements**

14

15 The system shall be targeted for use in TDD and FDD licensed spectrum allocated to  
16 mobile services below 3.5GHz.

17 The 802.20 standard SHALL support both Frequency Division Duplex (FDD) and Time  
18 Division Duplex (TDD) frequency arrangements.

19 -The same PHY protocol SHALL support both FDD and TDD. The PHY and MAC  
20 protocols shall allow, when operating in FDD mode, the half-duplex subscriber terminal  
21 operation.

22 The AI shall be designed for deployment within existing and future licensed spectrum  
23 below 3.5 GHz. The MBWA system frequency plan ~~shall~~ SHALL include both paired and  
24 unpaired channel plans with multiple bandwidths, e.g., 1.25 or 5 MHz, etc., to allow co-  
25 deployment with existing cellular systems. Channel bandwidths are consistent with  
26 frequency plans and frequency allocations for other wide-area systems

27 The design ~~shall~~ SHOULD be readily extensible to wider channels as they become  
28 available in the future.

1 **4.19 Signaling Requirements**

2 **4.20 Handoff Support**

3 Handoff methods are required in MBWA systems to facilitate providing continuous service for a population  
4 of moving Mobile Stations. Mobile stations may move between cells, between systems, between  
5 frequencies, and at the higher layer between IP Subnets. At the lowest layers, handoffs can be classified as  
6 either soft or hard handoffs, depending on whether there is a momentary service disruption or not.

7 **4.20.1 Soft Handoff**

8 **4.20.2 Hard Handoff**

9 **4.20.2.1 Hard Handoff Between Similar MBWA Systems**

10 **4.20.2.2 Hard Handoff Between Frequencies**

11 **4.20.3 IP-Level Handoff**

12 In order to support high speed mobility in an all IP network Mobile IP will have to be  
13 supported at a higher level. Integration of Foreign Agent or proxy Mobile IP into the base  
14 station or terminal will be required to support a clientless solution. Multiple IP addresses  
15 behind a single terminal should also be supported.

16 **4.20.4 Duplexing – FDD & TDD**

17 ~~The 802.20 standard shall support both Frequency Division Duplex (FDD) and Time~~  
18 ~~Division Duplex (TDD) frequency arrangements. (duplicate paragraph)~~

19 **4.20.4.1 RF Channelization**

20 **4.20.4.2 Bands of Applicability**

21 **4.20.4.3 Spectral Masks**

22 **4.20.5 Channel Characteristics**

23 **4.20.6 Adaptive Modulation and Coding**

24 The system will have adaptive modulation in both the uplink and the downlink

25 **4.20.7 Layer 1 to Layer 2 Inter-working**

26 The interface between layers 1 and 2 is not an exposed interface; it may be handled at the  
27 implementer's discretion.

28 **4.20.8 Hooks for Support of Multi Antenna Capabilities**

29

30 Support will be provided for advanced antenna technologies to achieve higher effective data rates, user  
31 capacity, cell sizes and reliability. Antenna diversity ~~shall~~ **SHOULD** not be a requirement of the mobile  
32 station.

1 The same PHY and MAC protocols SHALL optimally support Advanced Antenna techniques, in both FDD  
2 and TDD.

4 **4.21 Layer 2 MAC**

5 **4.21.1 MAC Modes of Operation (needs detail or it will be eliminated)**

6 **4.21.1.1 Random Access MAC (needs detail or it will be eliminated)**

7 **4.21.1.2 Polled MAC (needs detail or it will be eliminated)**

8 **4.21.2 Scheduler**

9 The AI specification ~~shall~~SHOULD not preclude proprietary scheduling  
10 algorithms, so long as the standard control messages, data formats, and system  
11 constraints are observed.

12 **4.22 Quality of Service and The MAC**

13 **4.22.1 Cos/QoS Matched-Criteria (needs detail or it will be eliminated)**

14 **4.22.1.1 Protocol field mapping (needs detail or it will be eliminated)**

15 **4.22.1.2 Hardware mapping (needs detail or it will be eliminated)**

16 **4.22.2 CoS/QoS Enforcement (needs detail or it will be eliminated)**

17 **4.22.2.1 Inter-packet delay variation (needs detail or it will be eliminated)**

18 **4.22.2.2 One-way, round-trip delay (needs detail or it will be eliminated)**

19 **4.22.2.3 Prioritization (needs detail or it will be eliminated)**

20 **4.22.2.4 Error correction (needs detail or it will be eliminated)**

21 **4.22.2.5 Queuing (needs detail or it will be eliminated)**

22 **4.22.2.6 Suppression (needs detail or it will be eliminated)**

23 **4.22.3 ARQ/Retransmission (needs detail or it will be eliminated)**

24 The AI SHALL efficiently support ARQ, for both up-link and doewn-link directions.

1 **4.22.4 MAC Error Performance (needs detail or it will be eliminated)**

2 **4.22.5 Latency (needs detail or it will be eliminated)**

3 **4.22.5.1 End to End Latency (needs detail or it will be eliminated)**

4 **4.22.5.2 End to End Latency Variation (needs detail or it will be eliminated)**

5 **4.22.6 Protocol Support (needs detail or it will be eliminated)**

6 The PHY and MAC protocols SHALL support both Ipv4 and Ipv6.

7

8 **4.22.7 Addressing (needs detail or it will be eliminated)**

9 **4.22.8 Support/Optimization for TCP/IP (needs detail or it will be eliminated)**

10

11 **4.22.9 MAC Complexity Measures**

12 To make the MBWA technology commercially feasible, it is necessary the complexity is minimized at the  
13 MAC, consistent with the goals defined for the technologies. This section defines complexity measures to  
14 be used in estimating MAC complexity. \

15 **4.22.10 Additional IP Offerings(needs detail or it will be eliminated)**

16 **4.23 Layer 3+ Support**

17 **4.23.1 OA&M Support (needs detail or it will be eliminated)**

18 **4.24 User State Transitions**

19 The AI shall support multiple protocol states with fast and dynamic transitions among  
20 them. It will provide efficient signaling schemes for allocating and de-allocating  
21 resources, which may include logical in-band and/or out-of-band signaling, with respect  
22 to resources allocated for end-user data. The AI shall support paging polling schemes for  
23 idle terminals to promote power conservation for MTs.

24 **4.25 Resource Allocation**

25 The AI shall support fast resource assignment and release procedures on the uplink and  
26 Duplexing – FDD & TDD

27 **4.26 Latency**

28 The system should have a one-way target latency of 50 msecs from the base station to the  
29 end-device when the system is under load.

1 The AI shall minimize the round-trip times (RTT) and the variation in RTT for  
2 acknowledgements, within a given QoS traffic class, over the air interface. The RTT over  
3 the airlink for a MAC data frame is defined here to be the duration from when a data  
4 frame is received by the physical layer of the transmitter to the time when an  
5 acknowledgment for that frame is received by the transmitting station. The airlink MAC  
6 frame RTT, which can also be called the “ARQ loop delay,” shall be less than 10 ms. Fast  
7 acknowledgment of data frames allows for retransmissions to occur quickly, reducing the  
8 adverse impact of retransmissions on IP packet throughput. This particularly improves the  
9 performance of gaming, financial, and other real-time low latency transactions.

## 11 5 References

- 13 • 802.20 - PD-02: Mobile Broadband Wireless Access Systems: Approved PAR  
14 (02/12/11)
- 15 • 802.20 - PD-03: Mobile Broadband Wireless Access Systems: Five Criteria (FINAL)  
16 (02/11/13)
- 17 • C802.20-03/45r1: Desired Characteristics of Mobile Broadband Wireless Access Air  
18 Interface (Arif Ansari, etc.(2003-05-12))
- 19 • C802.20-03/47r1: Terminology in the 802.20 PAR (Rev 1) (Johanne Wilfson, etc.  
20 (2003-05-12))
- 21 • [C802.20-03/32: Selected topics – Mobile System Requirements and Evaluation](#)  
22 [Criteria \(Marianna Goldhammer\)](#)



## 1 **Appendix A**                    **Definition of Terms and Concepts**

- 2     • *Active users* - An active user is a terminal that is registered with a cell and is using or  
3       seeking to use air link resources to receive and/or transmit data within a short time  
4       interval (e.g., within 100 ms).
  
- 5     • *Airlink MAC Frame RTT* - The round-trip time (RTT) over the airlink for a MAC data  
6       frame is defined here to be the duration from when a data frame is received by the  
7       physical layer of the transmitter to the time when an acknowledgment for that frame is  
8       received by the transmitting station.
  
- 9     • *Bandwidth or Channel bandwidth* - Two suggested bandwidths are 1.25 MHz and 5  
10       MHz, which correspond to the bandwidth of one channel (downlink or uplink) for  
11       paired FDD spectrum.
  
- 12    • *Cell* - The term “cell” refers to one single-sector base station or to one sector of a base  
13       station deployed with multiple sectors.
  
- 14    • *Cell sizes* – The maximum distance from the base station to the mobile terminal over  
15       which an acceptable communication can maintained or before which a handoff would  
16       be triggered determines the size of a cell.
  
- 17    • *Frequency Arrangements* – The frequency arrangement of the spectrum refers to its  
18       allocation for paired or unpaired spectrum bands to provide for the use of Frequency-  
19       Division Duplexing (FDD) or Time-Division Duplexing (TDD), respectively. The  
20       PAR states that the 802.20 standard should support both these frequency  
21       arrangements.
  
- 22    • *Interoperable* – Systems that conform to the 802.20 specifications should interoperate  
23       with each other, e.g., regardless of manufacturer. (Note that this statement is limited  
24       to systems that operate in accordance with the same frequency plan. It does not  
25       suggest that an 802.20 TDD system would be interoperable with an 802.20 FDD  
26       system.)
  
- 27    • *Licensed bands below 3.5 GHz* – This refers to bands that are allocated to the Mobile  
28       Service and licensed for use by mobile cellular wireless systems operating below 3.5  
29       GHz.
  
- 30    • *MAN* – Metropolitan Area Network.
  
- 31    • *Mobile Broadband Wireless Access systems* – This may be abbreviated as MBWA  
32       and is used specifically to mean “802.20 systems” or systems compliant with an  
33       802.20 standard.

- 1 • *Optimized for IP Data Transport* – Such an air interface is designed specifically for  
2 carrying Internet Protocol (IP) data traffic efficiently. This optimization could involve  
3 (but is not limited to) increasing the throughput, reducing the system resources  
4 needed, decreasing the transmission latencies, etc.
  
- 5 • *Peak aggregate data rate per cell* – The peak aggregate data rate per cell is the total  
6 data rate transmitted from (in the case of DL) or received by (in the case of UL) a base  
7 station in a cell (or in a sector, in the case of a sectorized configuration), summed over  
8 all mobile terminals that are simultaneously communicating with that base station.
  
- 9 • *Peak data rates per user (or peak user data rate)* – The peak data rate per user is the  
10 highest theoretical data rate available to applications running over an 802.20 air  
11 interface and assignable to a single mobile terminal. The peak data rate per user can  
12 be determined from the combination of modulation constellation, coding rate and  
13 symbol rate that yields the maximum data rate.
  
- 14 • *Spectral efficiency* – Spectral efficiency is measured in terms of bits/s/Hz/cell. (In the  
15 case of a sectorized configuration, spectral efficiency is given as bits/s/Hz/ sector.)
  
- 16 • *Sustained spectral efficiency* – Sustained spectral efficiency is computed in a network  
17 setting. It is defined as the ratio of the expected aggregate throughput (bits/sec) to all  
18 users in an interior cell divided by the system bandwidth (Hz). The sustained spectral  
19 efficiency calculation should assume that users are distributed uniformly throughout  
20 the network and should include a specification of the minimum expected data  
21 rate/user.
  
- 22 • *Sustained user data rates* – Sustained user data rates refer to the typical data rates that  
23 could be maintained by a user, over a period of time in a loaded system. The  
24 evaluation of the sustained user data rate is generally a complicated calculation to be  
25 determined that will involve consideration of typical channel models, environmental  
26 and geographic scenarios, data traffic models and user distributions.
  
- 27 • *Targets for 1.25 MHz channel bandwidth* – This is a reference bandwidth of 2 x 1.25  
28 MHz for paired channels for FDD systems or a single 2.5 MHz channel for TDD  
29 systems. This is established to provide a common basis for measuring the bandwidth-  
30 dependent characteristics. The targets in the table indicated by the asterisk (\*) are  
31 those dependent on the channel bandwidth. Note that for larger bandwidths the targets  
32 may scale proportionally with the bandwidth.
  
- 33 • *Various vehicular mobility classes* – Recommendation ITU-R M.1034-1 establishes  
34 the following mobility classes or broad categories for the relative speed between a  
35 mobile and base station:
  - 36 ○ Stationary (0 km/h),
  - 37 ○ Pedestrian (up to 10 km/h)

{July 10, 2003}

~~IEEE P802.20 PD<number>/V<number>~~

- 1           ○ Typical vehicular (up to 100 km/h)
- 2           ○ High speed vehicular (up to 500 km /h)
- 3           ○ Aeronautical (up to 1 500 km/h)
- 4           ○ Satellite (up to 27 000 km/h).
- 5
- 6

1     **Appendix B**                                   **Unresolved issues**

2     Coexistence and Interference Resistance

3     Since MBWA technology will be operative in licensed bands some of which are currently being utilized by  
4     other technologies, it is important that coexistence and interference issues be considered from the outset,  
5     unlike the situation in unlicensed spectrum where there is much more freedom of design. Of particular  
6     interest is adjacent channel interference; if MBWA is deployed adjacent to any of a number of technologies,  
7     the development effort should evaluate potential effects.

8     Interference can be grouped as co-channel and adjacent channel interference; evaluation of all combinations  
9     of technologies likely to be encountered should be part of the 802.20 processes. Furthermore, 802.20  
10    technology is described in the PAR to encompass both TDD and FDD techniques. These should be  
11    evaluated separately, and requirements provided below.

12    •   5.1 Coexistence Scenarios

13    •   FDD Deployments

14    •   In this section, scenarios should be developed with 802.20 deployed as FDD,  
15    following the FDD “rules” for each of the 2G and 3G technologies likely to be  
16    encountered in practice.

17    •

18    •   802.20 and AMPS

19    •   802.20 and IS-95

20    •   802.20 and GSM

21    •   802.20 and LMR

22    •   802.20 and CDMA2000

23    •   802.20 and WCDMA

24    •   802.20 and 1xEVDO

25    •   802.20 and HSDPA

26    •   802.20 and 1xEV/DV

27    •   5.1.2 TDD Deployments

28    •   In this section, scenarios should be developed with 802.20 deployed as TDD,  
29    following any TDD “rules” for each of the 2G and 3G technologies likely to be  
30    encountered in practice. Since the majority of existing technologies are deployed as

1 FDD solutions, some new ground is being explored here, and it will be necessary to  
2 make sure that the 802.20 technology will not seriously impact the existing services.

3 • 802.20 and AMPS

4 • 802.20 and IS-95

5 • 802.20 and GSM

6 • 802.20 and LMR

7 • 802.20 and CDMA2000

8 • 802.20 and WCDMA

9 • 802.20 and 1xEVDO

10 • 802.20 and HSDPA

11 • 802.20 and 1xEV/DV

12 • Adjacent Channel Interference

13 • Definitions and Characteristics

14 • Requirements

15 • Co-channel Interference

16 • Definitions and Characteristics

17 • Requirements

18 • TDD Interference in Traditionally FDD Bands

19 • Since 802.20 is listed as being both TDD and FDD, it should be evaluated in a  
20 scenario where TDD 802.20 technology is deployed in a traditionally FDD frequency  
21 band. 802.20 should develop appropriate scenarios and requirements so that the new  
22 technology meets all necessary coexistence requirements that may be placed upon it.

23 • Definition and Characteristics

24 • Requirements

25 *Interworking: The AI should support interworking with different wireless access systems,*  
26 *e.g. wireless LAN, 3G, PAN, etc. Handoff from 802.20 to other technologies should be*  
27 *considered and where applicable procedures for that hand-off shall be supported.[Dan*  
28 *Gal [dgal@lucent.com](mailto:dgal@lucent.com)]: This issue is quite **critical** to the successful deployment of 802.20 systems in*

1 existing and future markets worldwide. The purpose of defining Coexistence requirements in this document  
2 is to assure that 802.20 systems would not cause interference to or be susceptible to interference from other  
3 wireless systems operating in the same geographical area. Detailed quantitative RF emission limits need to  
4 be specified as well as received interference levels that the 802.20 receivers would have to accept and  
5 mitigate.

## 6 **2. Interworking**

7 *[Dan Gal [dgal@lucent.com](mailto:dgal@lucent.com)]:* Interworking between 802.20 systems and other wireless systems is highly  
8 desirable and may give it a competitive edge. Systems that have disparate physical layers can still interwork  
9 via the higher protocol layers. Current interworking solutions exist for CDMA2000/802.11b and for GSM-  
10 GPRS/802.11b. Multi-mode devices, such as 802.11b+802.11a or more recently, 802.11b/g are now  
11 available. Existing applications (such as Windows XP mobility support) provide for transparent roaming  
12 across systems, automatically handling the applications' reconfiguration so as to keep sessions working  
13 seamlessly.

14 Building support for interworking in 802.20 – right from the first release of the standard – would add  
15 significantly to its market appeal.

16