

DRAFT

IEEE 802.3

Call For Interest

Automotive Optical Multi Gig
July 2019

Consensus presentation

Objective of this meeting

- To measure the interest of starting a new study group to address:
 - Multi gigabit optical PHYs for Automotive applications
- In this meeting, we don't need to:
 - Choose any technical solution
 - Fully explore the problem
 - Debate strengths and weaknesses of solutions
 - Choose any one solution
 - Create PAR or five criteria
 - Create a standard or specification
- Anyone on the room may speak & vote
- RESPECT... give it, get it

Agenda

- Market Drivers
- Technical Feasibility
- Market potential
- Why now?
- Q&A Panel
- Straw Polls

Panelists

- Carlos Pardo, KDPOF
- OEM affiliation 1
- OEM affiliation 2
- OEM affiliation 3
- TIER-1 affiliation 1
- TIER-1 affiliation 2

Market Drivers

Automotive Ethernet

- The automotive industry has decided to go into Ethernet
- Several 802.3 standards published or in preparation
 - 10 Mb/s (P802.3cg Task Force)
 - 100 Mb/s (100BASE-T1)
 - 1000 Mb/s (1000BASE-T1, 1000BASE-RH)
 - 2.5 , 5 & 10 Gb/s (P802.3ch Task Force)
 - 25 & 50 Gb/s (Study group)
- Industry associations are supporting the development of Ethernet for the automotive industry:
 - Open alliance
 - Jaspar
- Complementary standardization bodies are specifying “missing parts” for automotive Ethernet: Connectors, cables, interfaces, W&S, etc.
 - ISO 21111 within ISO - TC 22 - SC31 & SC32

Market Drivers

Automotive Optical Ethernet

- 1000BASE-RH is being used by several OEMs worldwide due to its intrinsic advantages:
 - Galvanic isolation
 - Superior EMC performance. Easy engineering.
 - Weight
- Optical and copper Ethernet are complementary, even in the same car. First car in the market with 1000BASE-RH will be in 2020.

Hideki Goto, Chairman of **JASPAR**'s Next Generation High-Speed Network Working Group and Group Manager at **Toyota** stated:


“... optical network solution greatly improves the speed of automotive networks and moves beyond obsolete, lagging networking protocols. Optical Ethernet technology is ideal for future in-vehicle network infrastructure, since it provides a radiation-free harness, and thus meets prerequisites concerning electromagnetic compatibility (EMC). Higher speeds are achieved by wider use of the electromagnetic spectrum, which forces OEMs to impose more and more stringent emissions limits on electronic components.”

Martin Hiller, Volvo Cars

“... many factors come into play here, such as costs, the degree of maturity of the components and so on. Ethernet via fiber optics is definitely of interest. ...”


Automotive Optical Ethernet Connector

- How does it look like ?

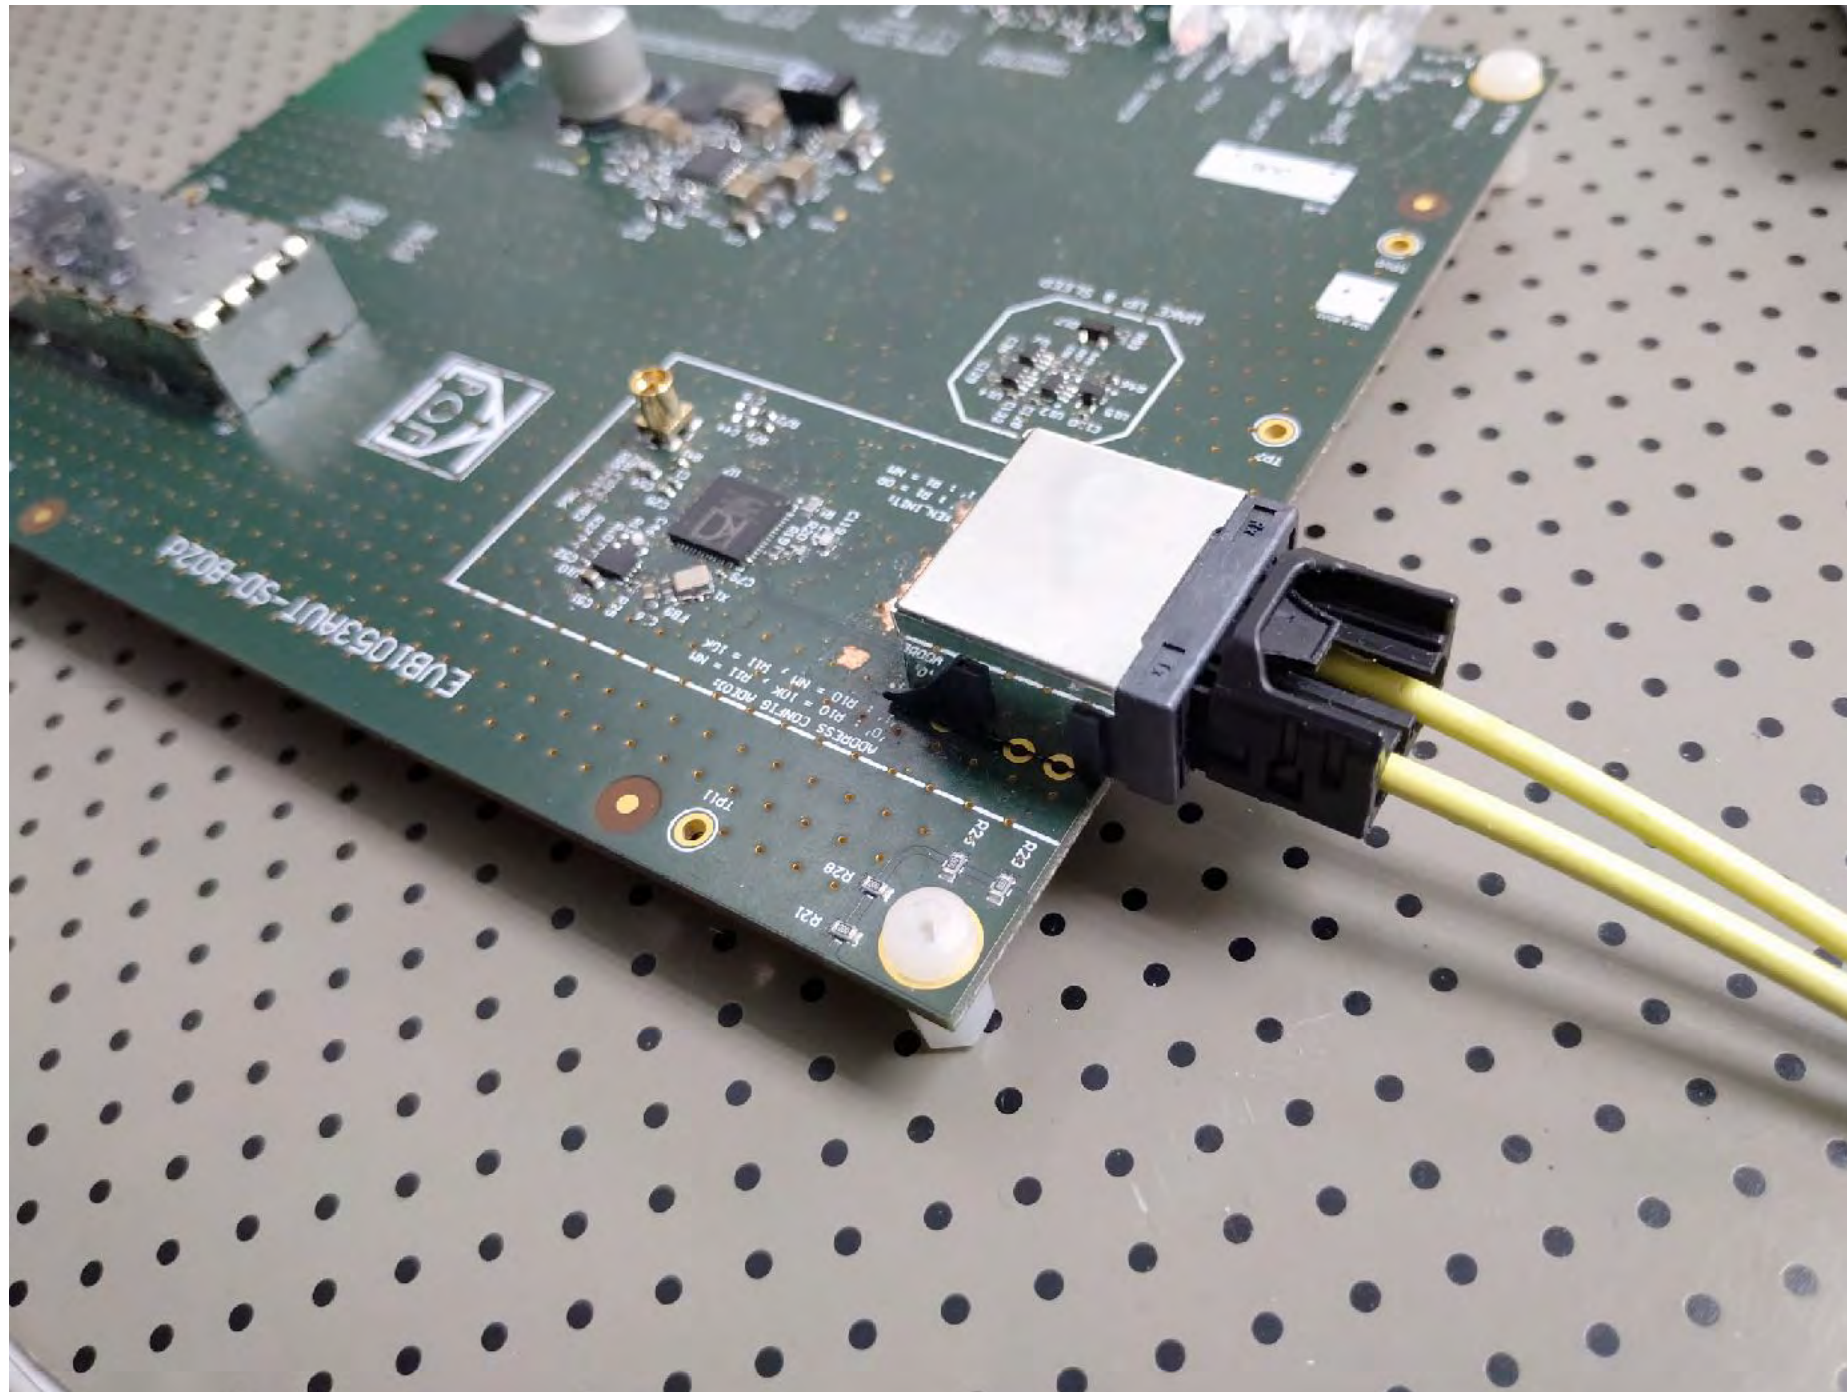

Automotive Optical Ethernet Connector

- How does it look like ?

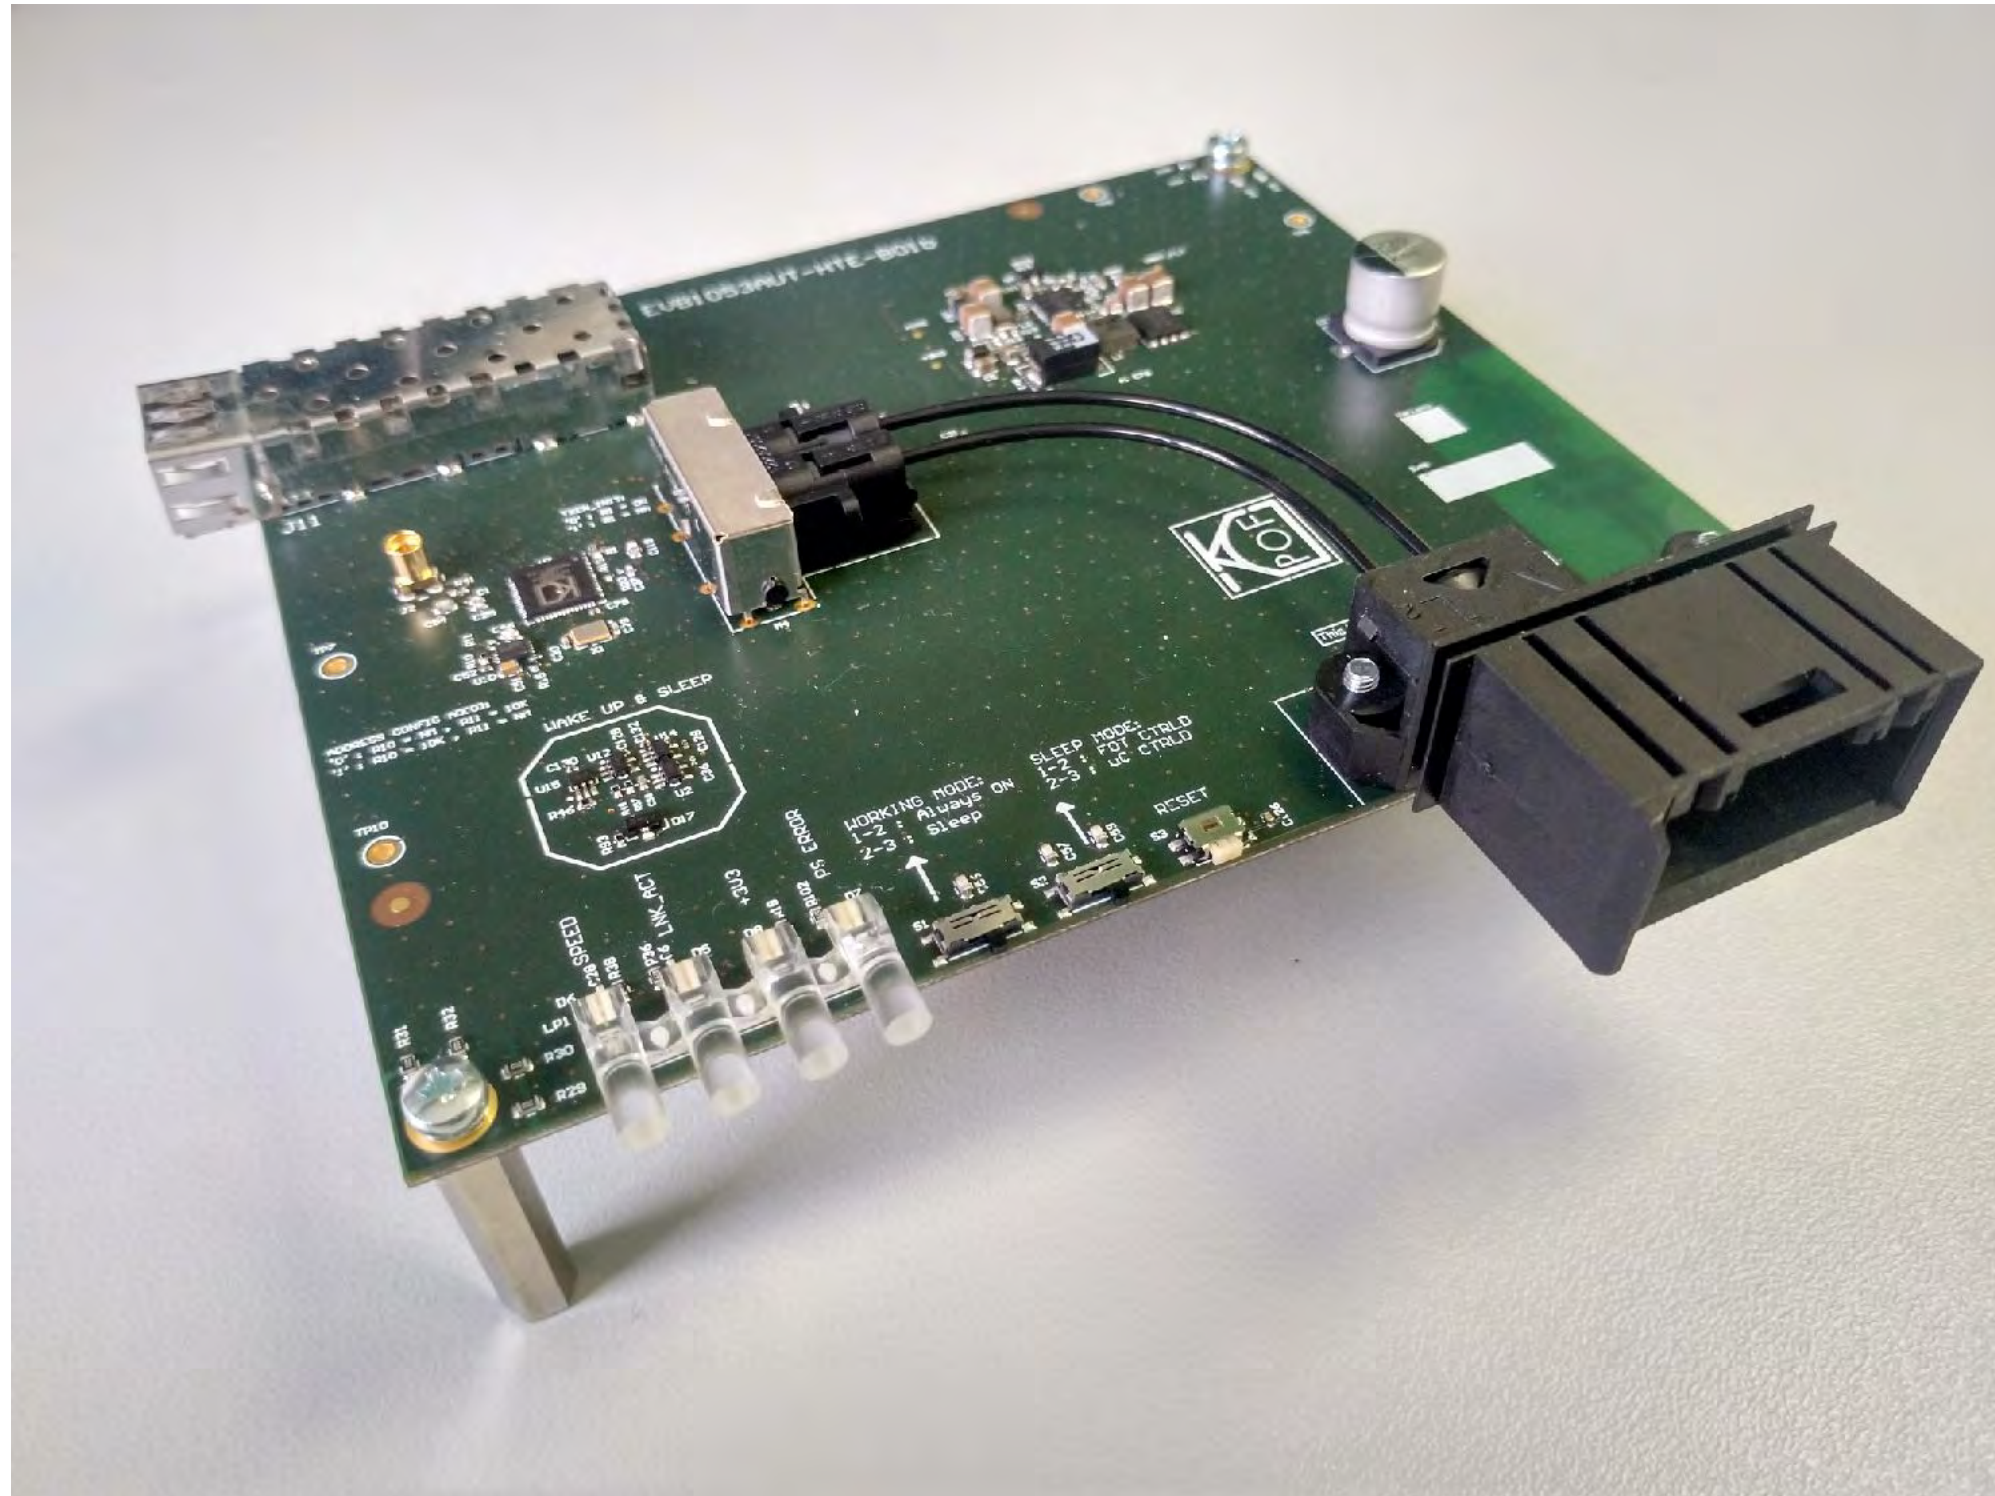

Automotive Optical Ethernet Connector

- How does it look like ?




Automotive Optical Ethernet Harness


- How is installed ?

Seamless integration of POF with W/H at manufacturing and installation

Instrument Panel W/H

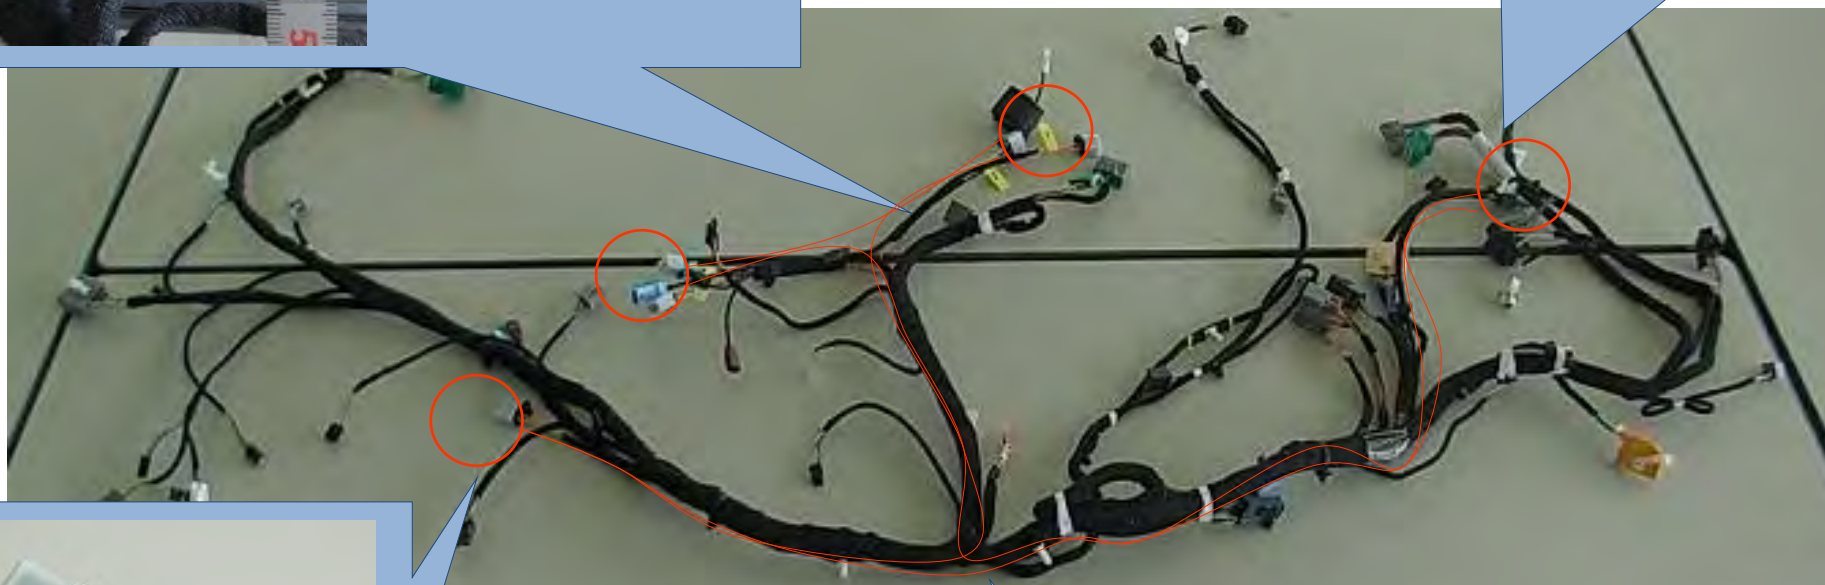

○ Optical Connector End
— Routing



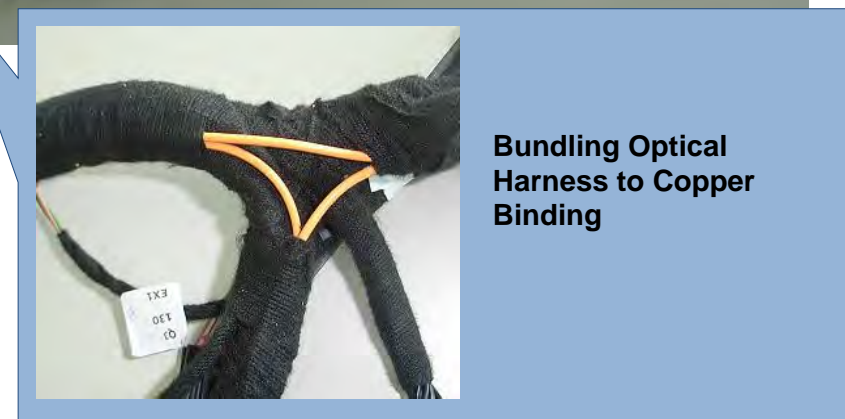


Automotive Optical Ethernet Harness

- How is installed ?

Floor W/H

Seamless integration of POF with W/H at manufacturing and installation

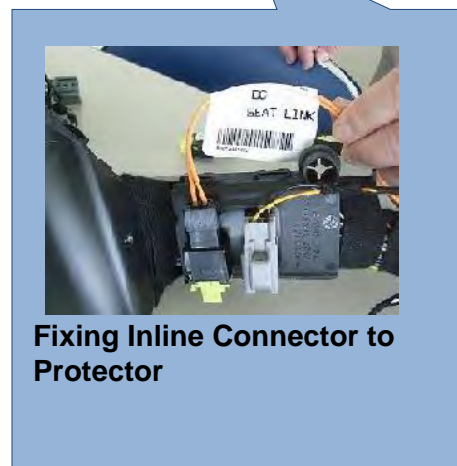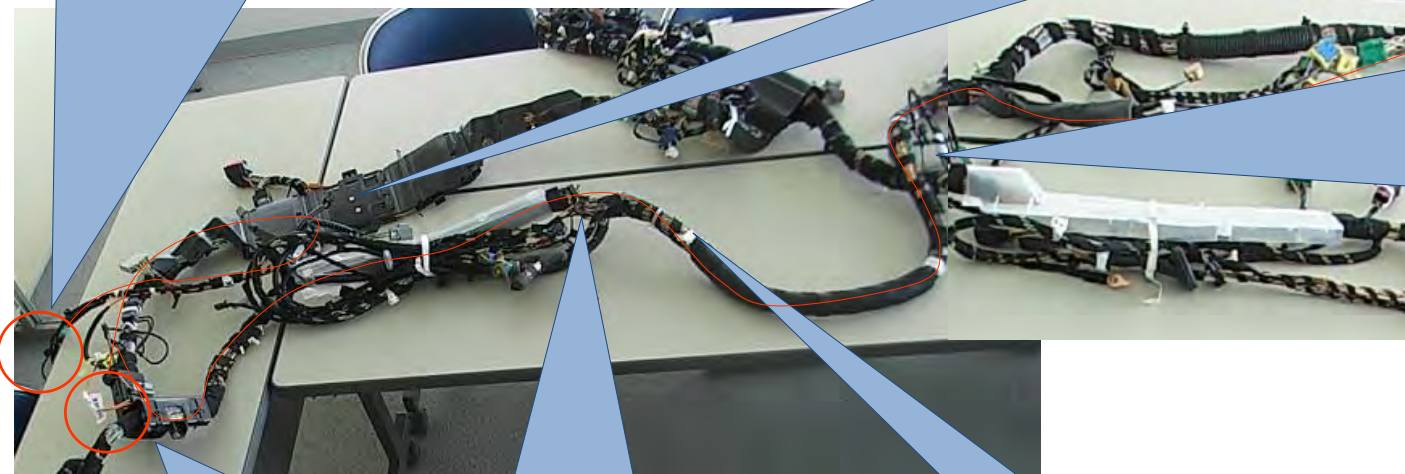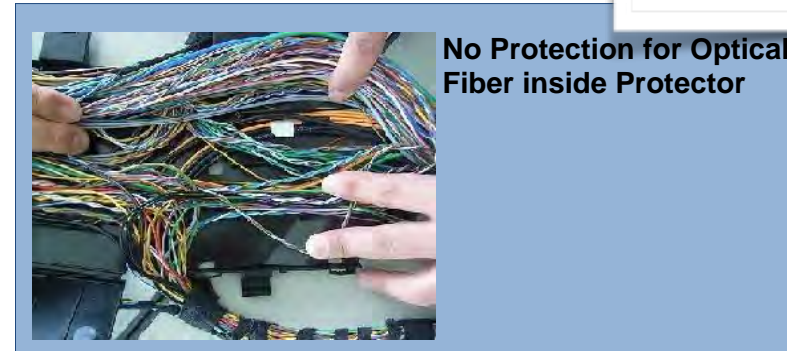

GM Poll

Surveys – OEM Responses

Cable Types – Should different speeds use the same cable or is it okay if they're different?

- 68.75% of respondents said it is okay to use different cables for different speeds

Is it okay to use optical cable?

- 50% of respondents said they would consider using optical cable

Maximum operating temperature

- 62.5% need 105 C for most or all speeds
- 18.75% need more than 105 C for some or all speeds
- 18.75% say 85 C is sufficient for all speeds


Minimum operating temperature

- 100% agree that -40 C is sufficient
- -55 C is required for storage

Use cases

Why optical?

- Smart Antenna

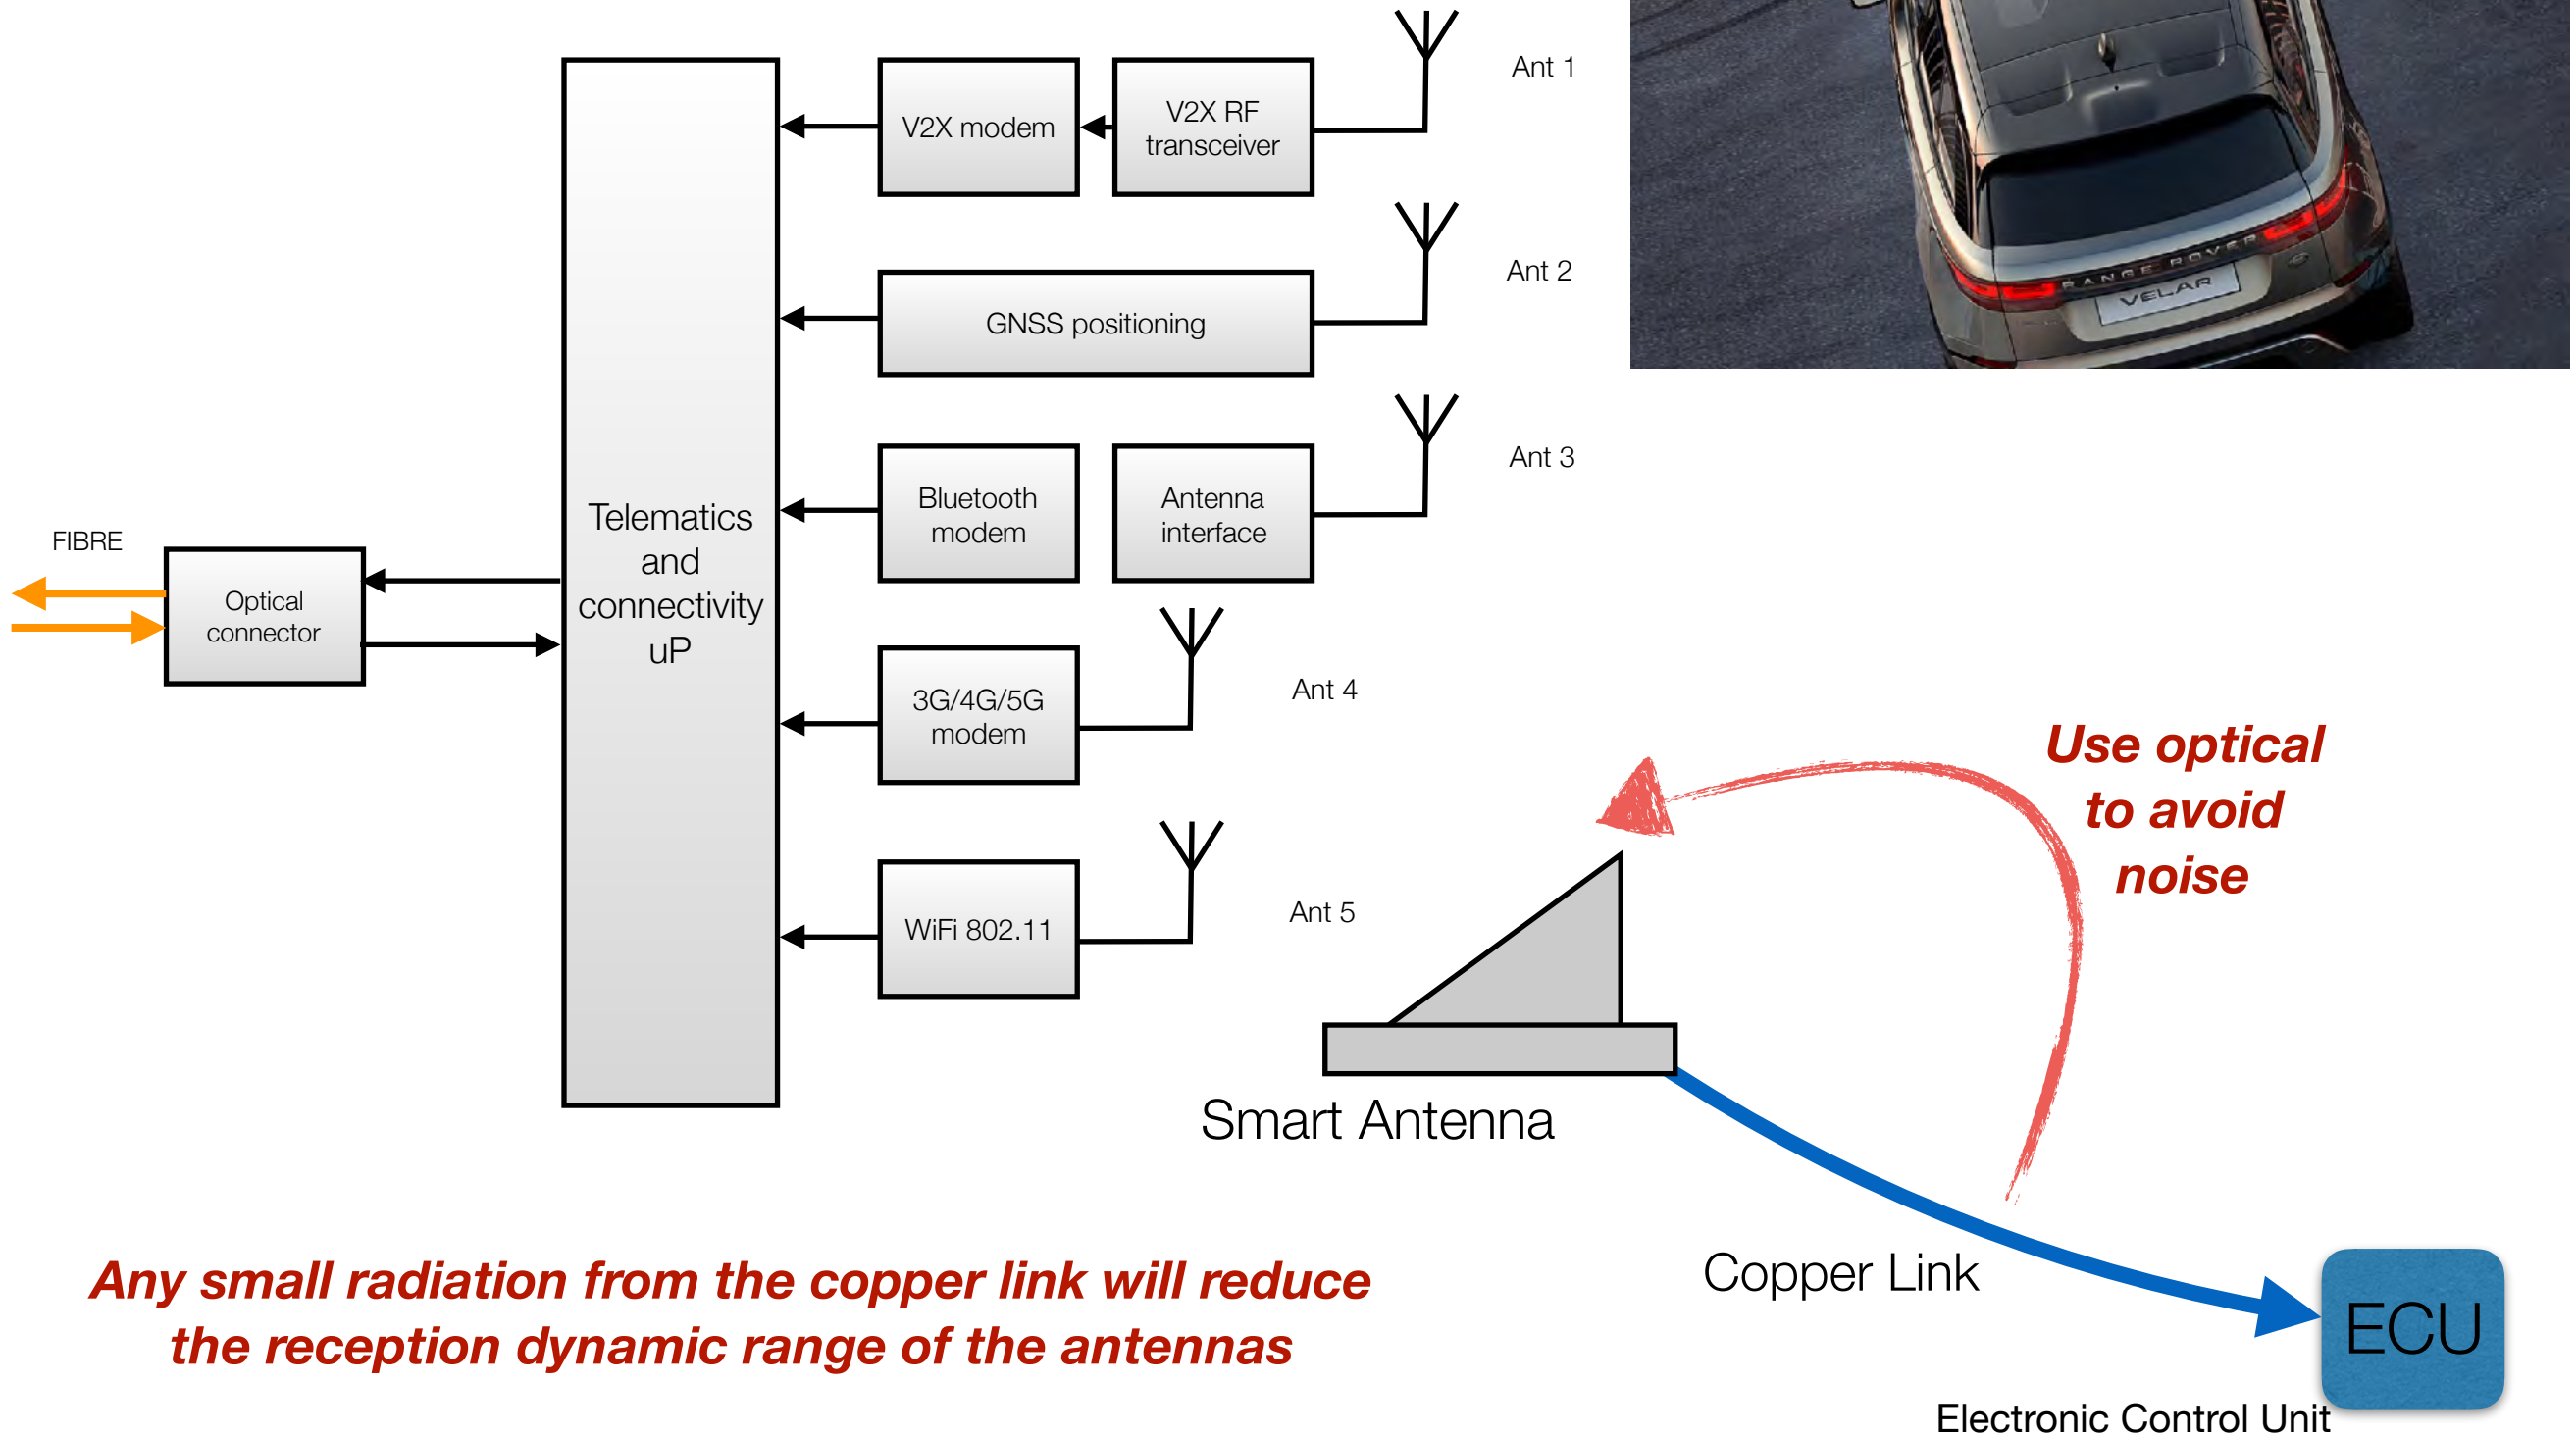


Any small radiation from the copper link will reduce the reception dynamic range of the antennas

Electronic Control Unit

Use cases

Why optical?

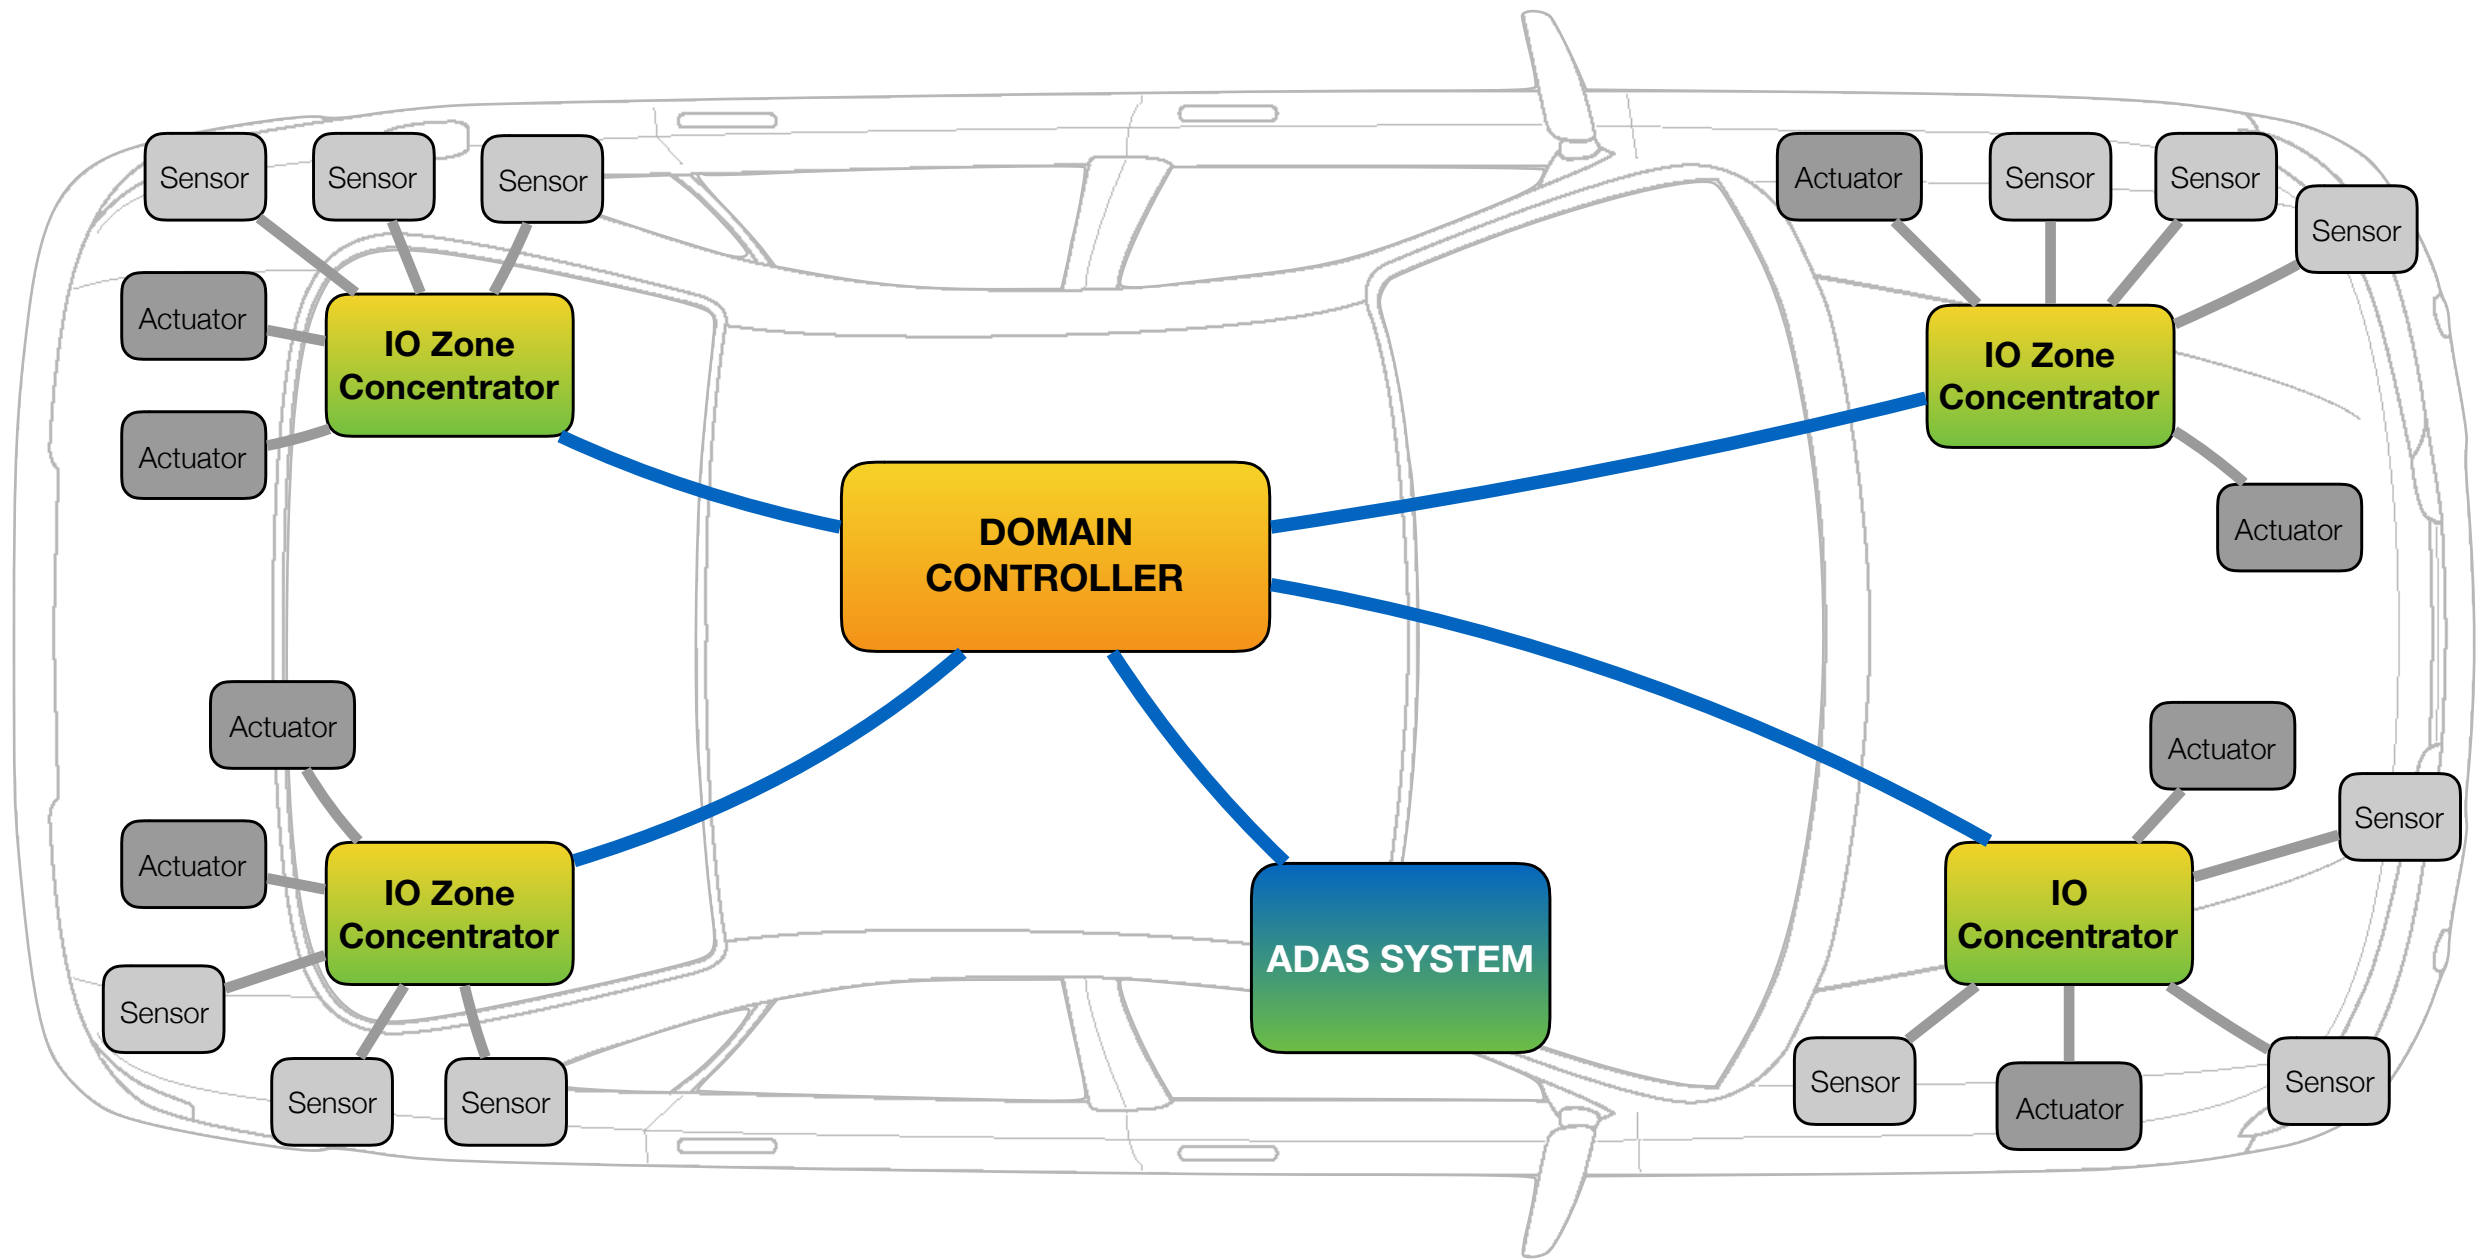

Local zone link ———


ASIL-B link —————

ADAS=Advanced Driver Assistance System

Use cases

Why optical?

Save backbone with redundant links will be needed for ASIL-D architectures.

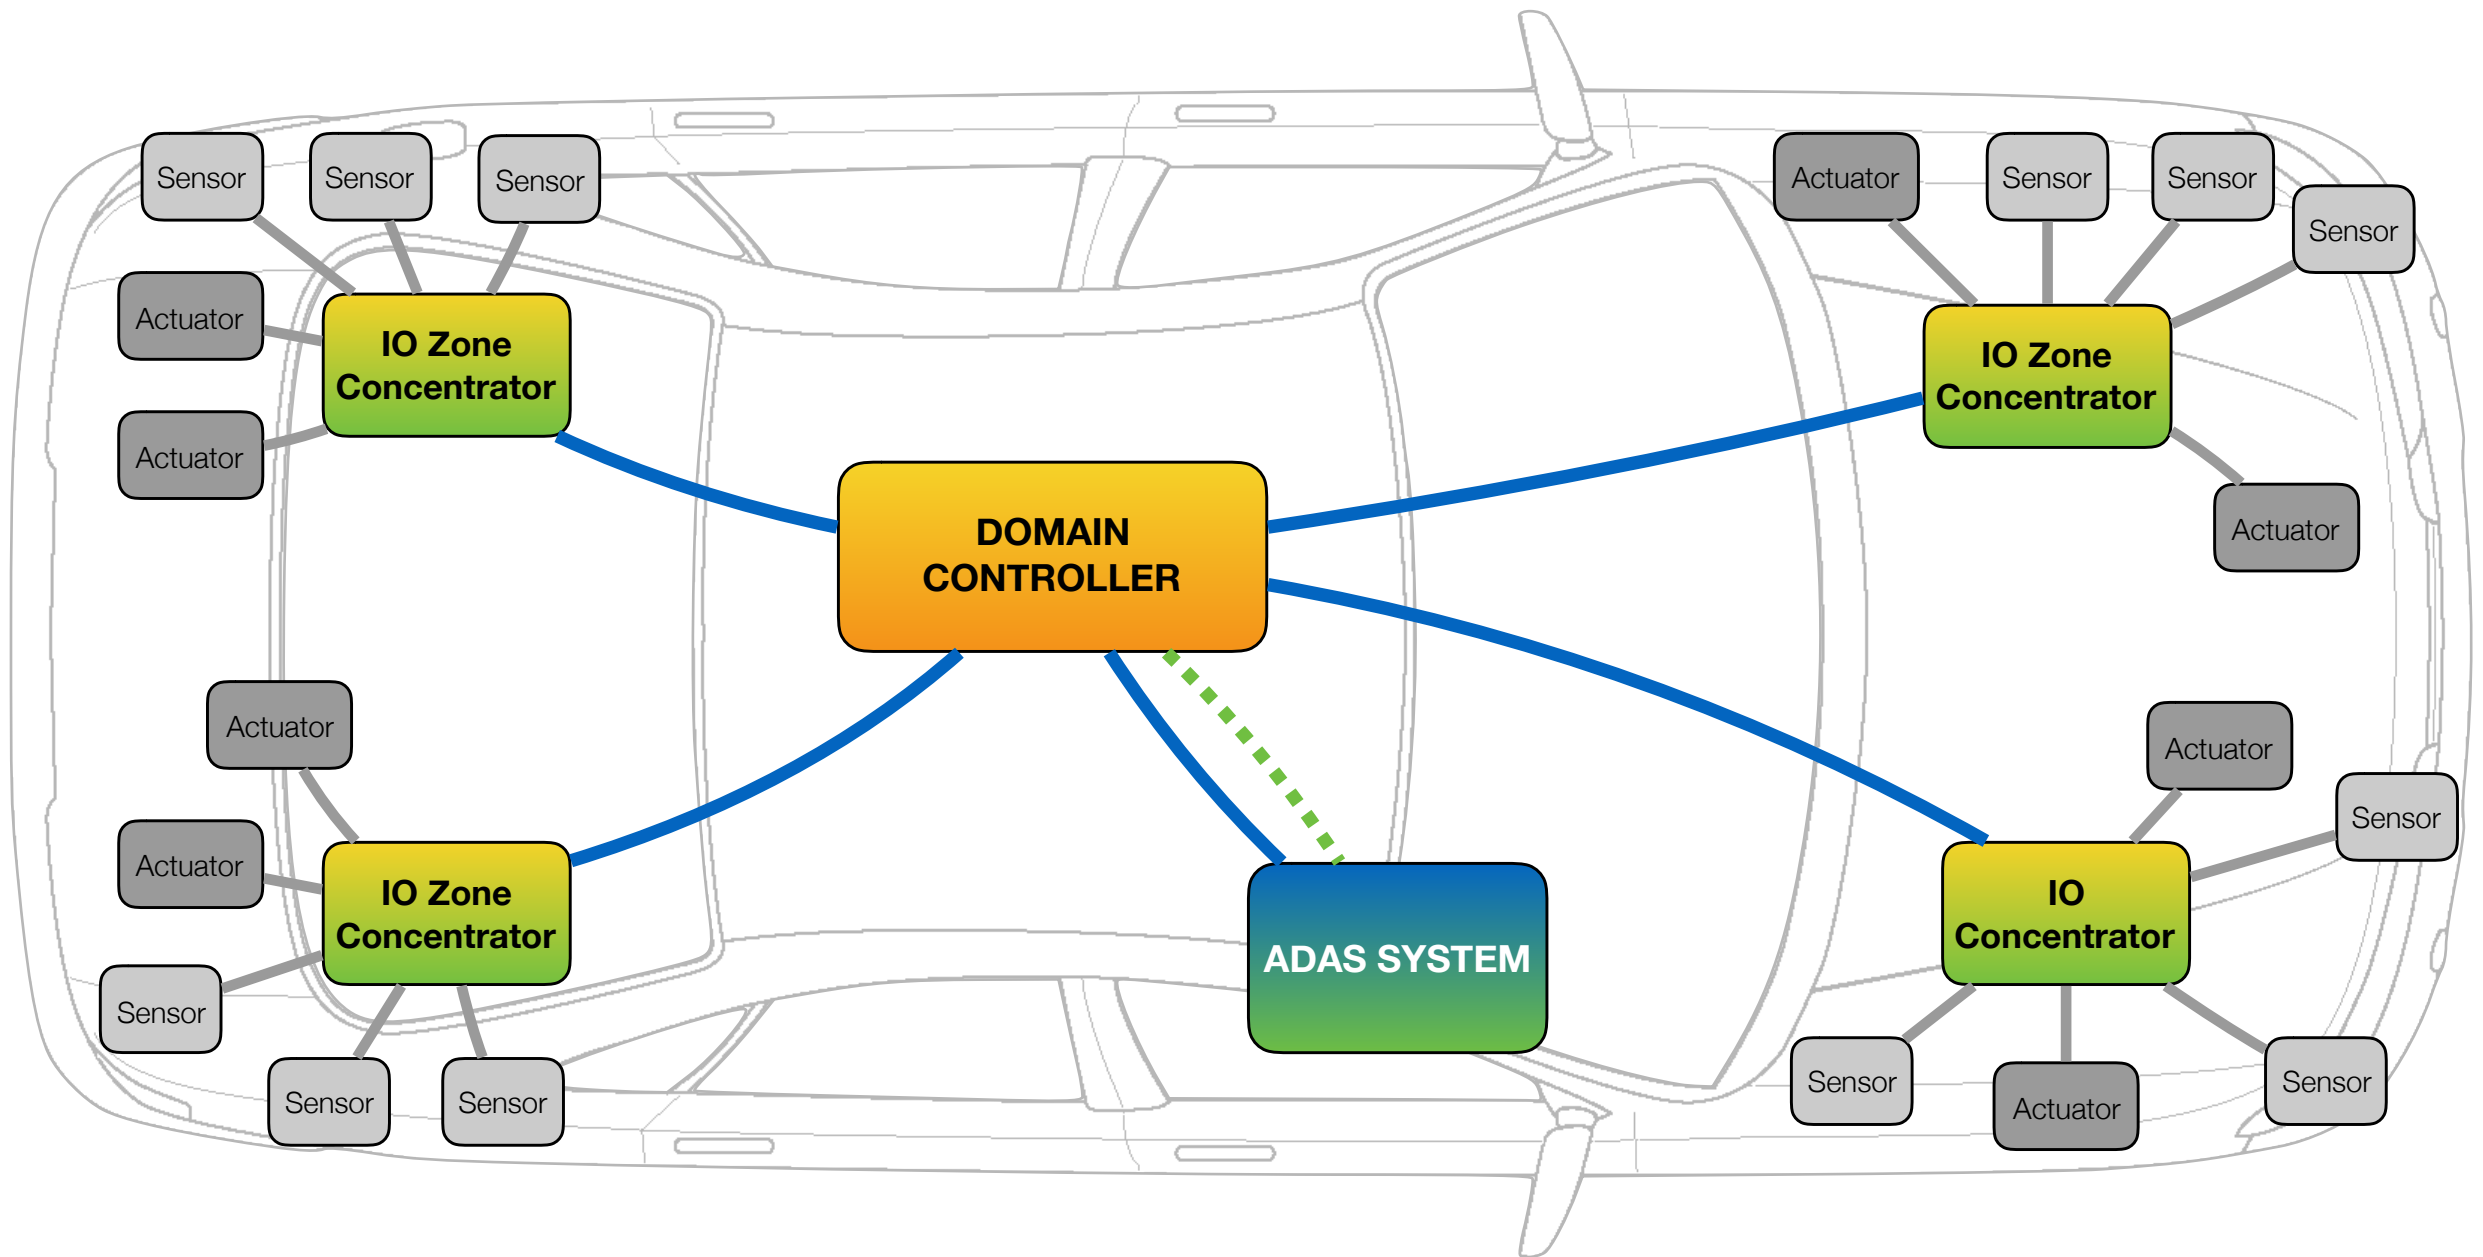

Local zone link ———

ASIL-D Safety architecture
ASIL-D = ASIL-B + ASIL-B


Redundant ASIL-B link - - - - -
 ASIL-B link ———

ASIL=Automotive Safety Integrity Level

Use cases

Why optical?

Save backbone with redundant links will be needed for ASIL-D architectures.

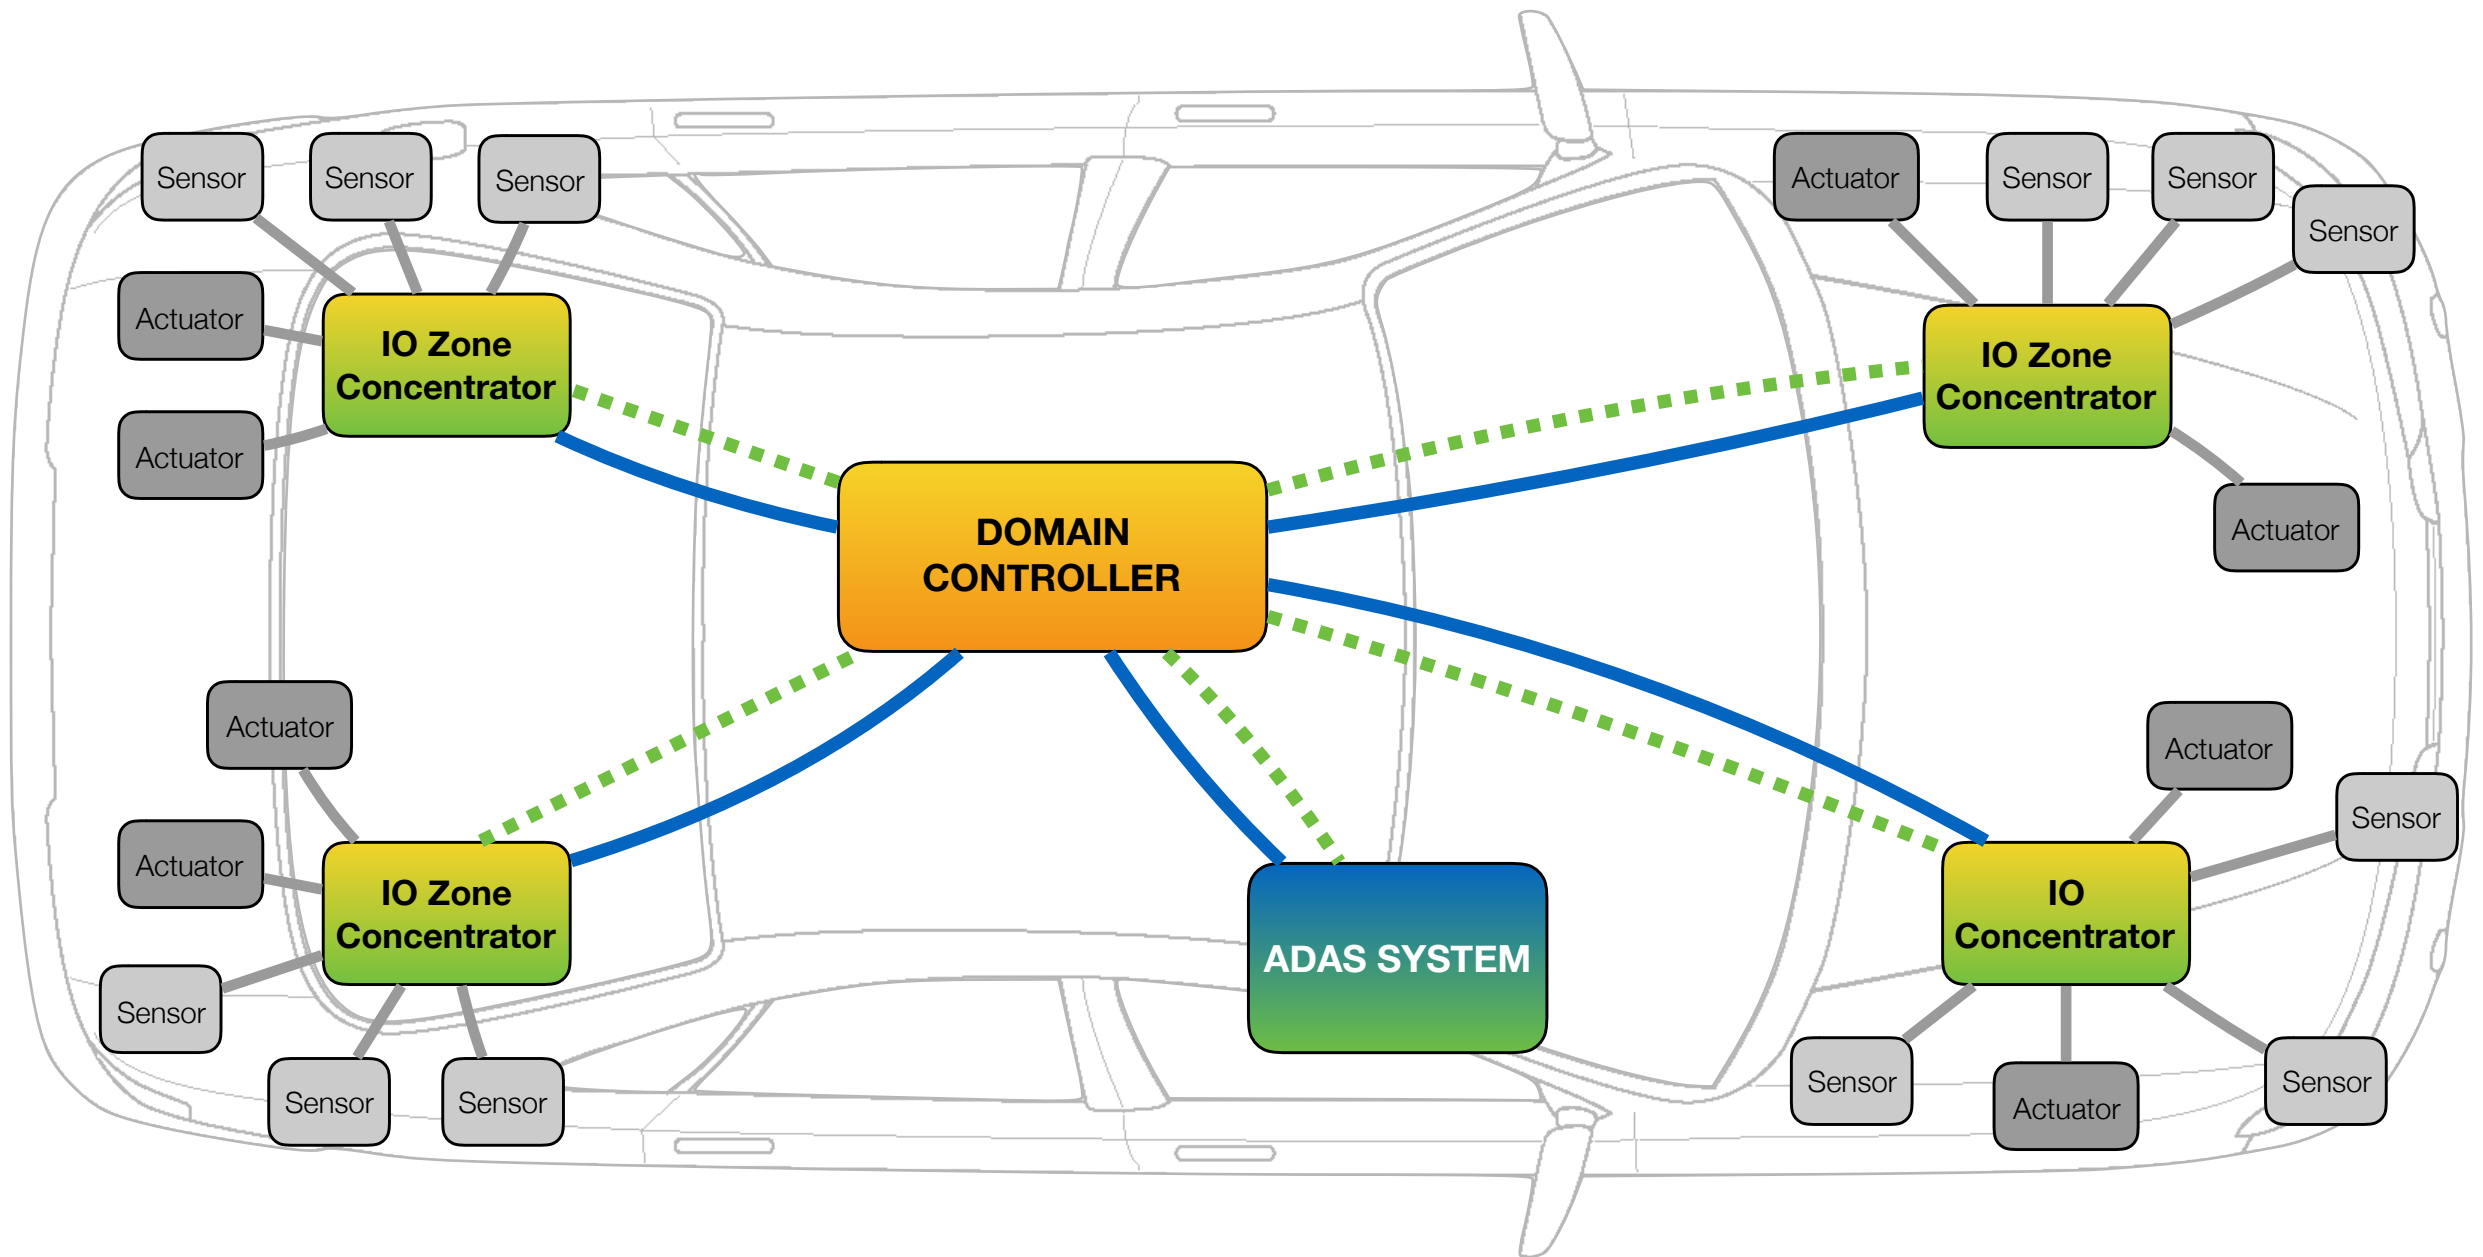

Local zone link ———

ASIL-D Safety architecture
ASIL-D = ASIL-B + ASIL-B


Redundant ASIL-B link
ASIL-B link ———

ASIL=Automotive Safety Integrity Level


Use cases

Why optical?

During operation, currents up to 600 A moves from the front to the back of the car.
It generates voltage drops between different ECUs of the car.
These voltages create up to 6A current flows going through the shield of the data cables.

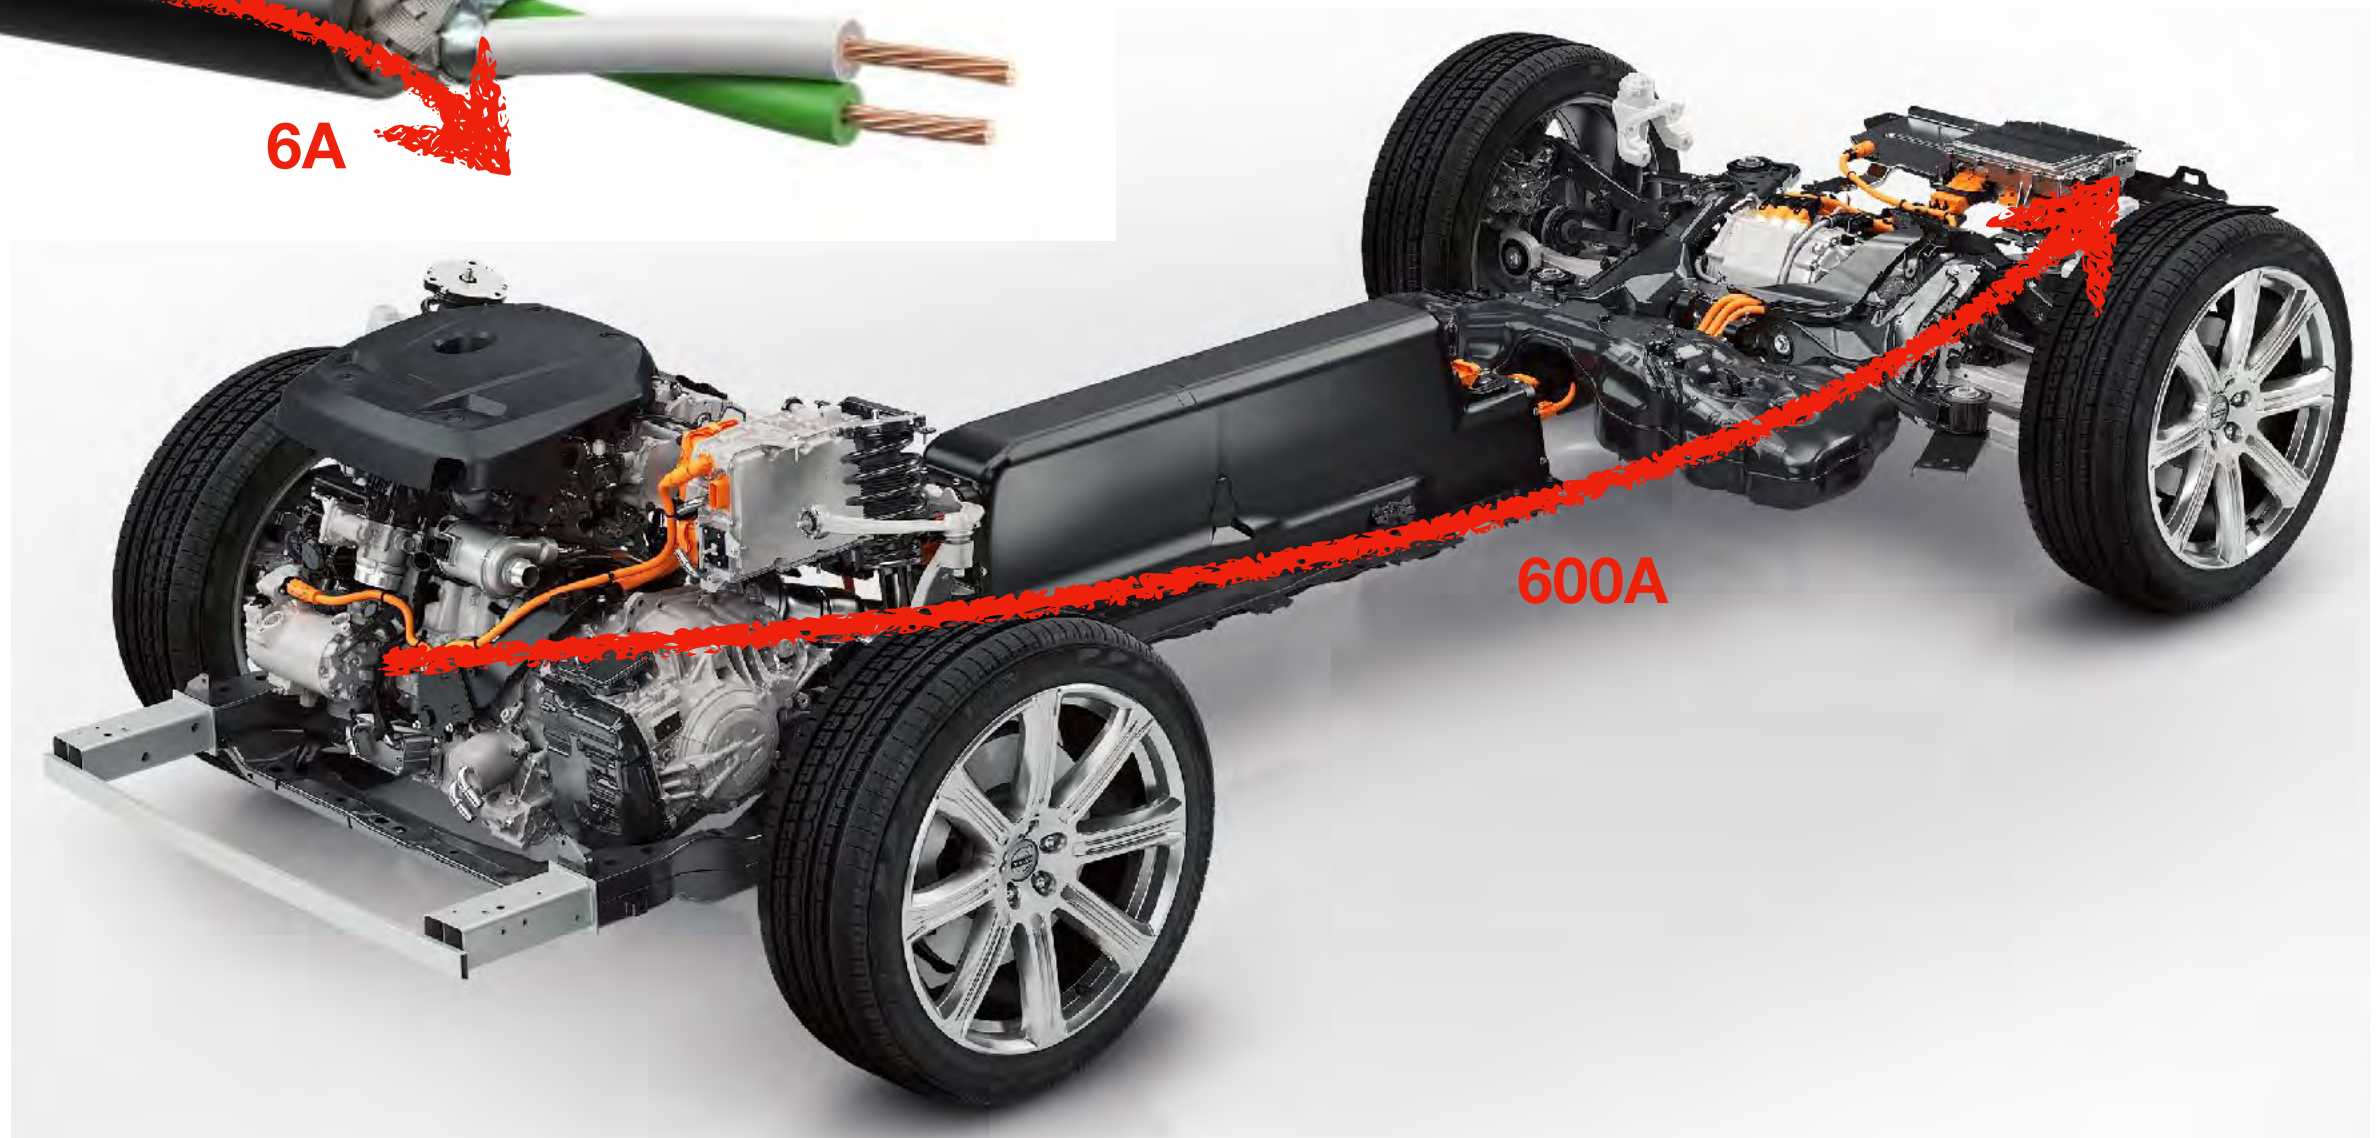


How shielded copper cables radiate?

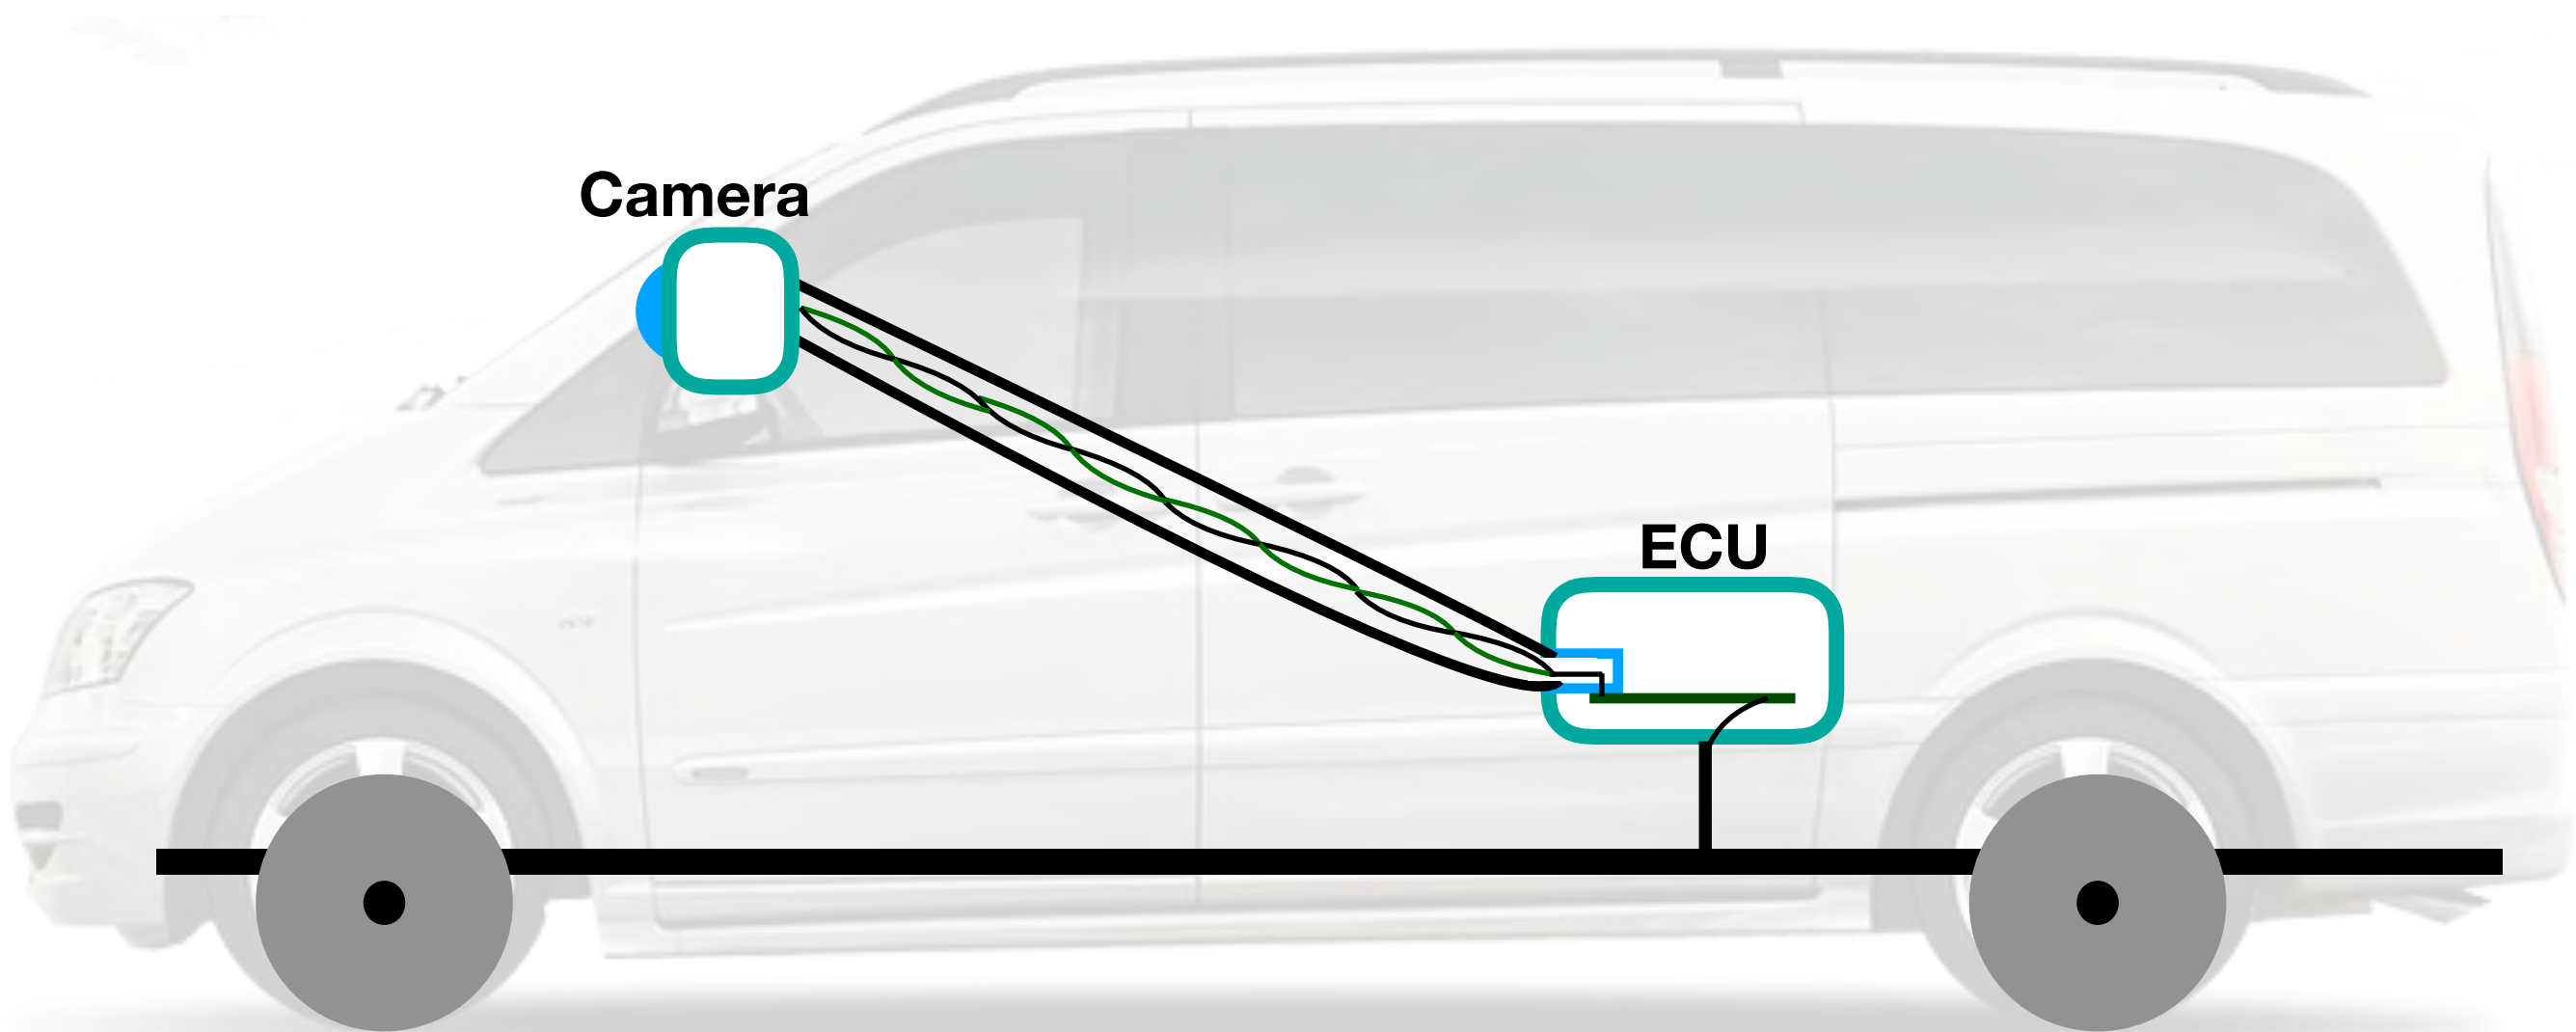


How shielded copper cables radiate?

- Shield is an antenna for any ground bouncing noise of the ECU (E field)

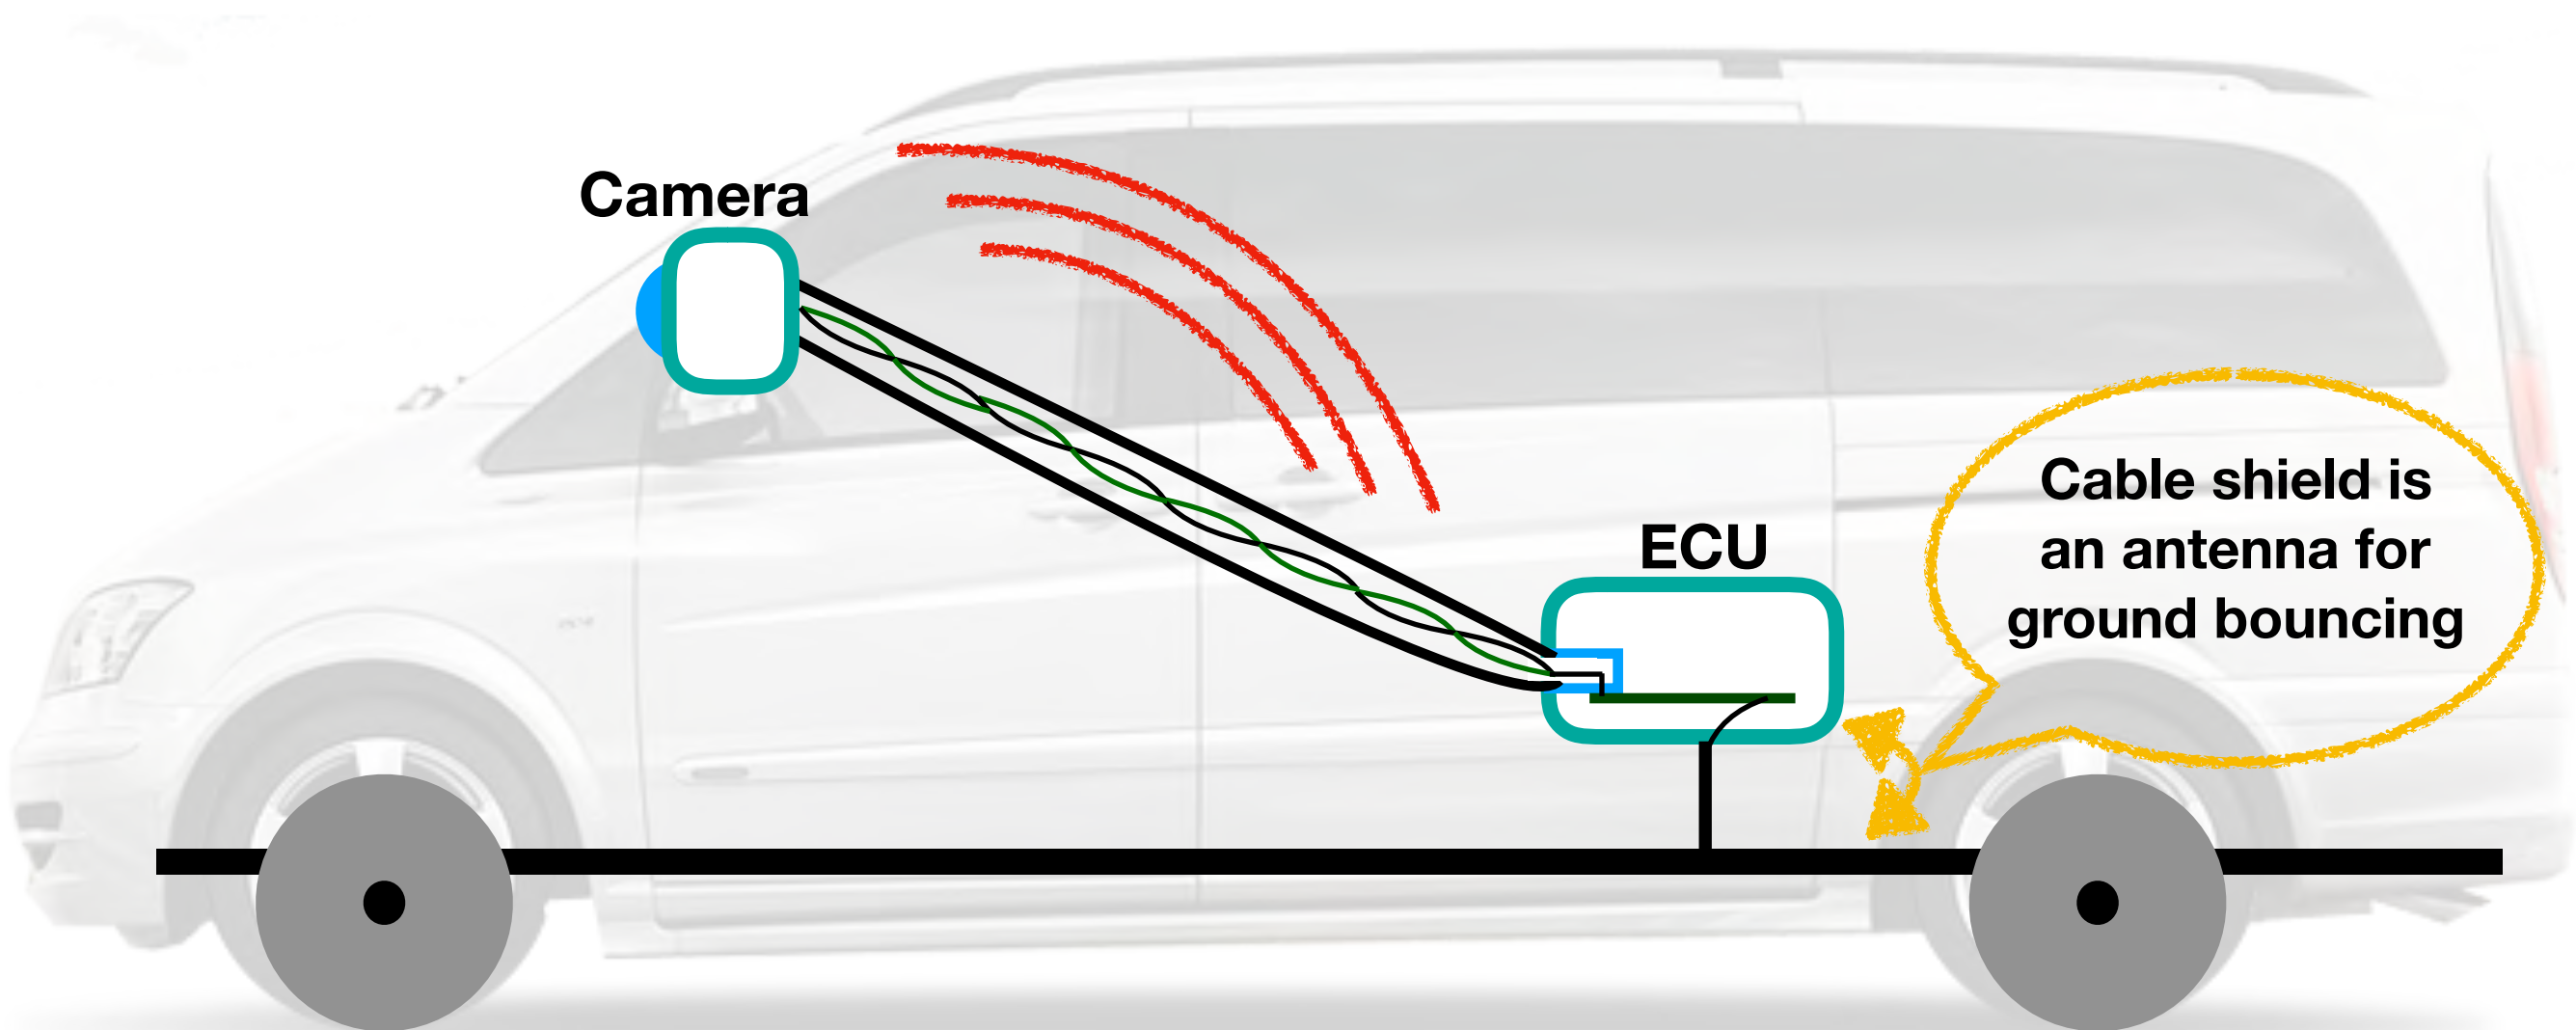


How shielded copper cables radiate?

- Shield is an antenna for any ground bouncing noise of the ECU (E field)
- Common mode conversion plus inductive shielding generates currents and voltages in the shield, radiating noise as an antenna

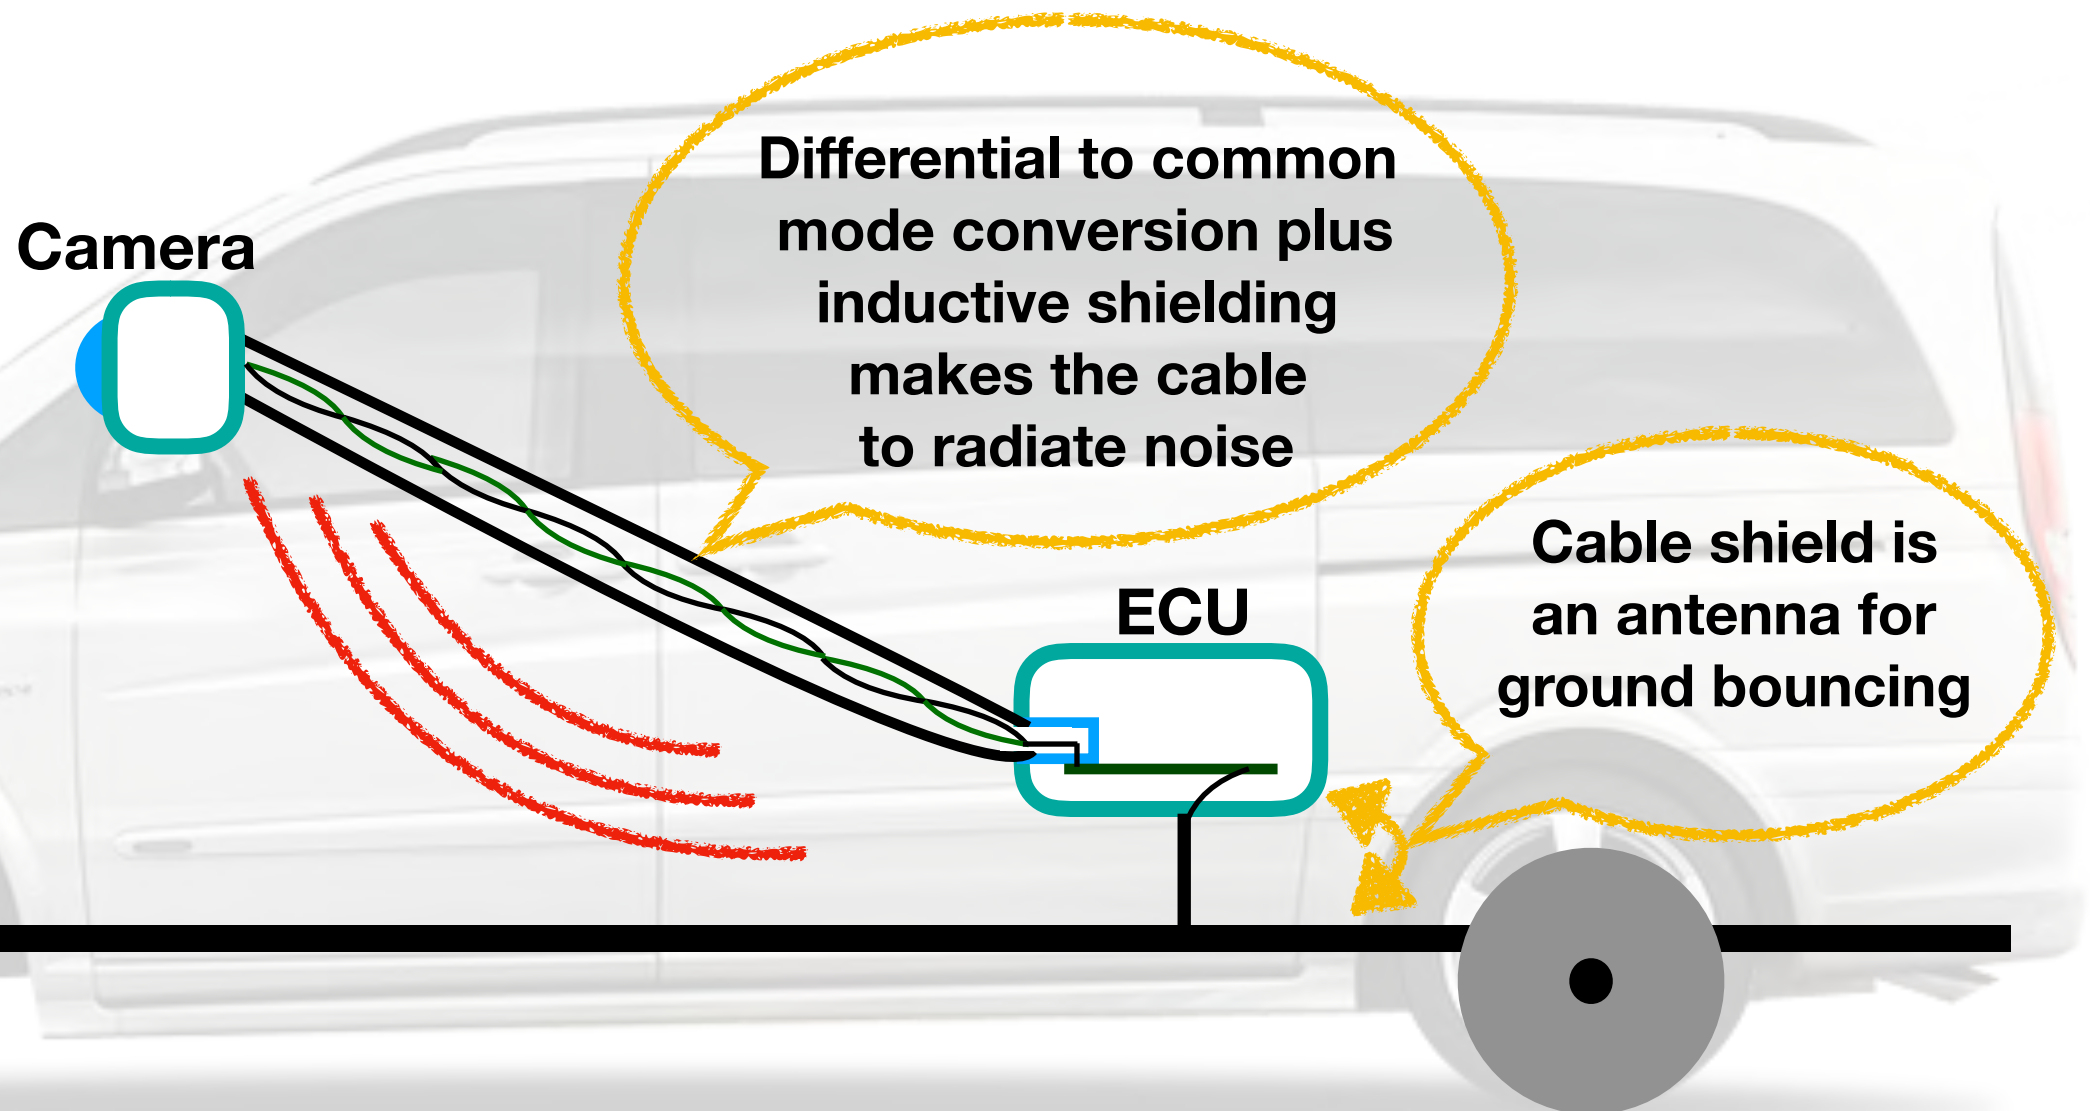


How shielded copper cables radiate?

- Shield is an antenna for any ground bouncing noise of the ECU (E field)
- Common mode conversion plus inductive shielding generates currents and voltages in the shield, radiating noise as an antenna
- Cable (inductive) shielding is a root cause of uncontrolled current loops (H field): conductive noise is converted into radiative facilitated by cable layout

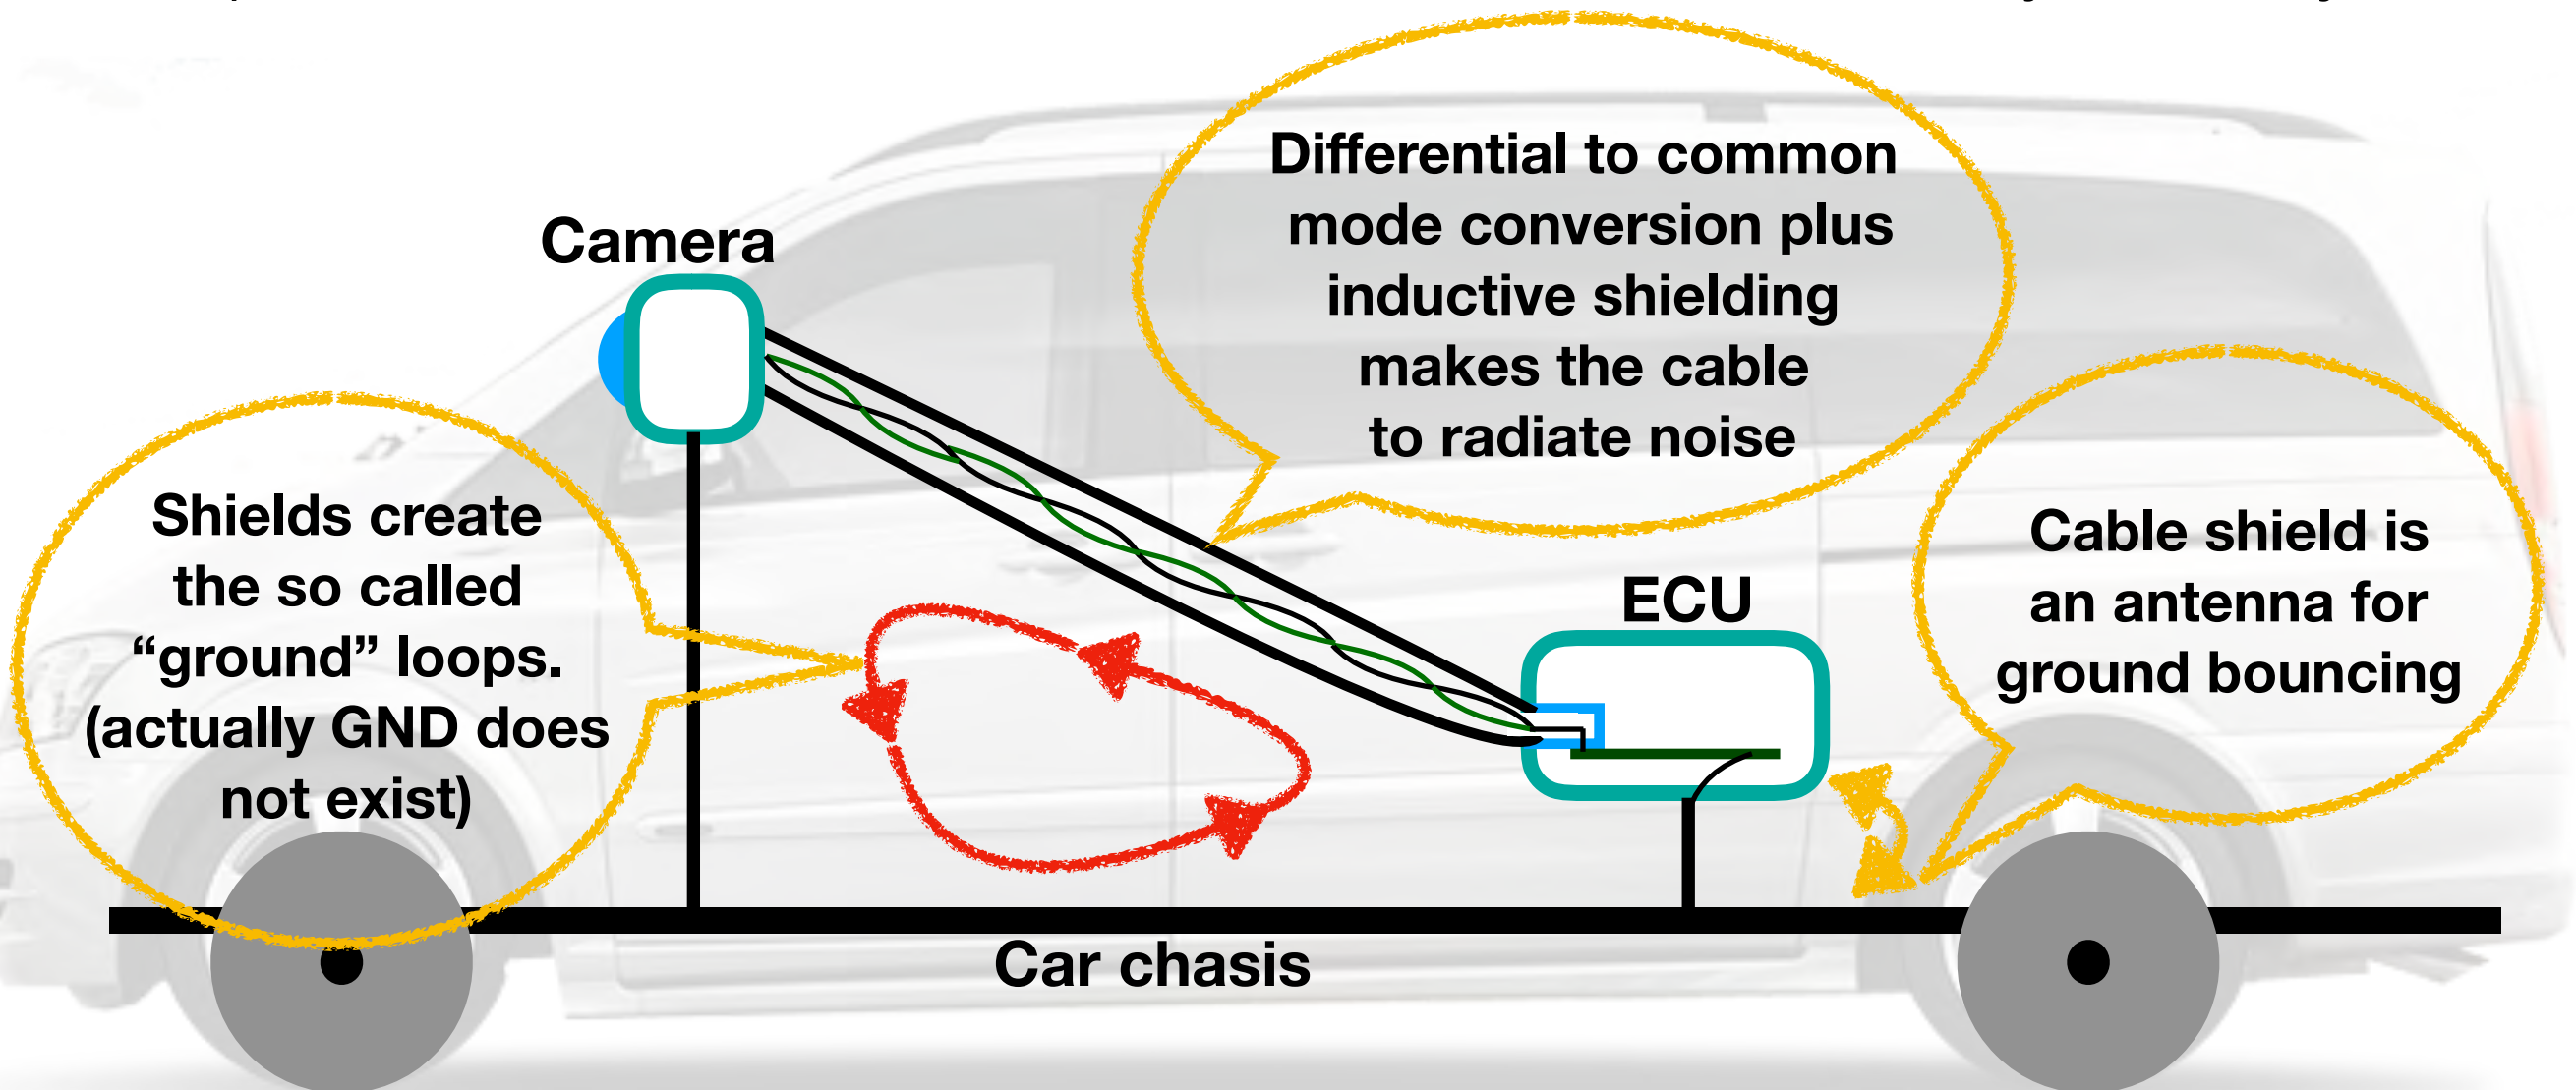

How shielded copper cables radiate?

- Shield is an antenna for any ground bouncing noise of the ECU (E field)
- Common mode conversion plus inductive shielding generates currents and voltages in the shield, radiating noise as an antenna
- Cable (inductive) shielding is a root cause of uncontrolled current loops (H field): conductive noise is converted into radiative facilitated by cable layout

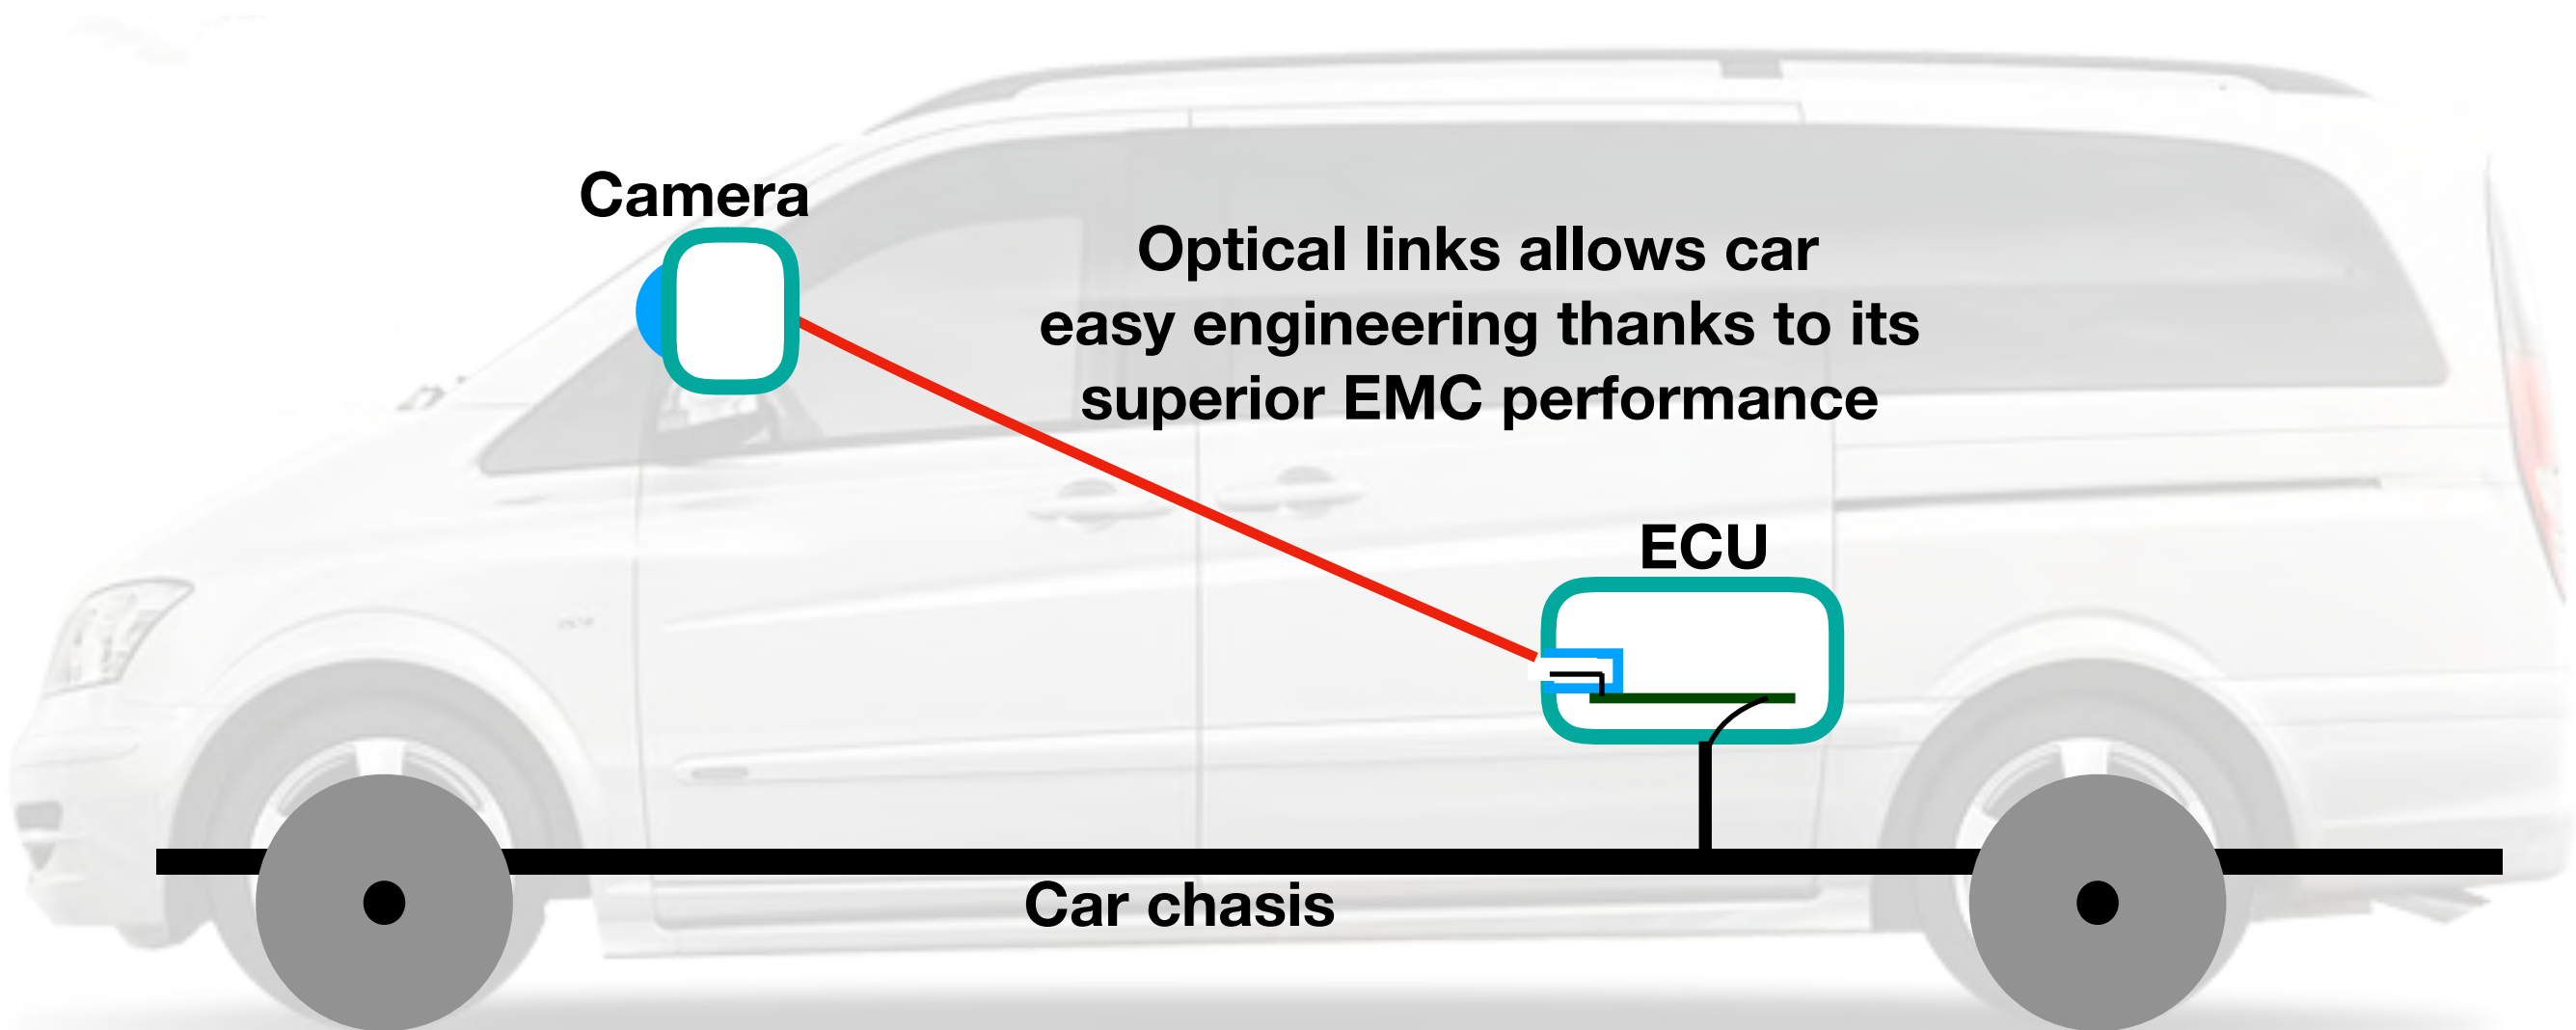

Market Drivers

Optical multi-gig use cases

- Provided by OEMs specialists:

	2.5 Gbps	5 Gbps	10 Gbps	25 Gbps	50 Gbps	Unidirectional
Backbone	✓	✓	✓			
Smart Antenna	✓					
Cameras, Sensors	✓	✓	✓			✓
Display	✓	✓				✓
Future				✓	✓	

Can an Existing Optical Ethernet Types be Used?


- IEEE Std 802.3 already includes the 10GBASE-SR specification that may be considered as starting point to develop multi-gigabit optical solution for automotive applications.
 - However, is it really good enough for automotive applications?
- We need to examine each components in the optical link:
 - Fibres / cables
 - Connectors
 - Light sources
 - Photo Diodes

10GBASE-SR

- 10GBASE-SR was not designed to meet automotive requirements:
 - Automotive temperature range: $T_j = -40^{\circ}\text{C} \rightarrow 105^{\circ}\text{C}/125^{\circ}\text{C}$ and more than 15 years of operation with close to 0 ppm failures
- 10GBASE-SR has no specified temperature range
 - 10GBASE-SR VCSEL designs doesn't meet automotive reliability and target temperature range
 - VCSEL current density will need to be reduced to meet automotive requirements
 - VCSEL bandwidth will be reduced due to current density reduction
 - Relative intensity noise will increase due to current density reduction
- Insertion Loss will be increased due to:
 - 4 inline connectors with much higher estimated losses per connector due to:
 - Vibration,
 - Aging,
 - Dust, etc.
- Cost and power consumption restrictions are different
- OAM channel is needed
- System needs to be adaptive to cope with:
 - dynamic changes of temperature
 - large parametric variation with manufacturing processes and temperature
 - low cost

Possible fibres

Nitto Plastic optical fiber target spec & launch schedule

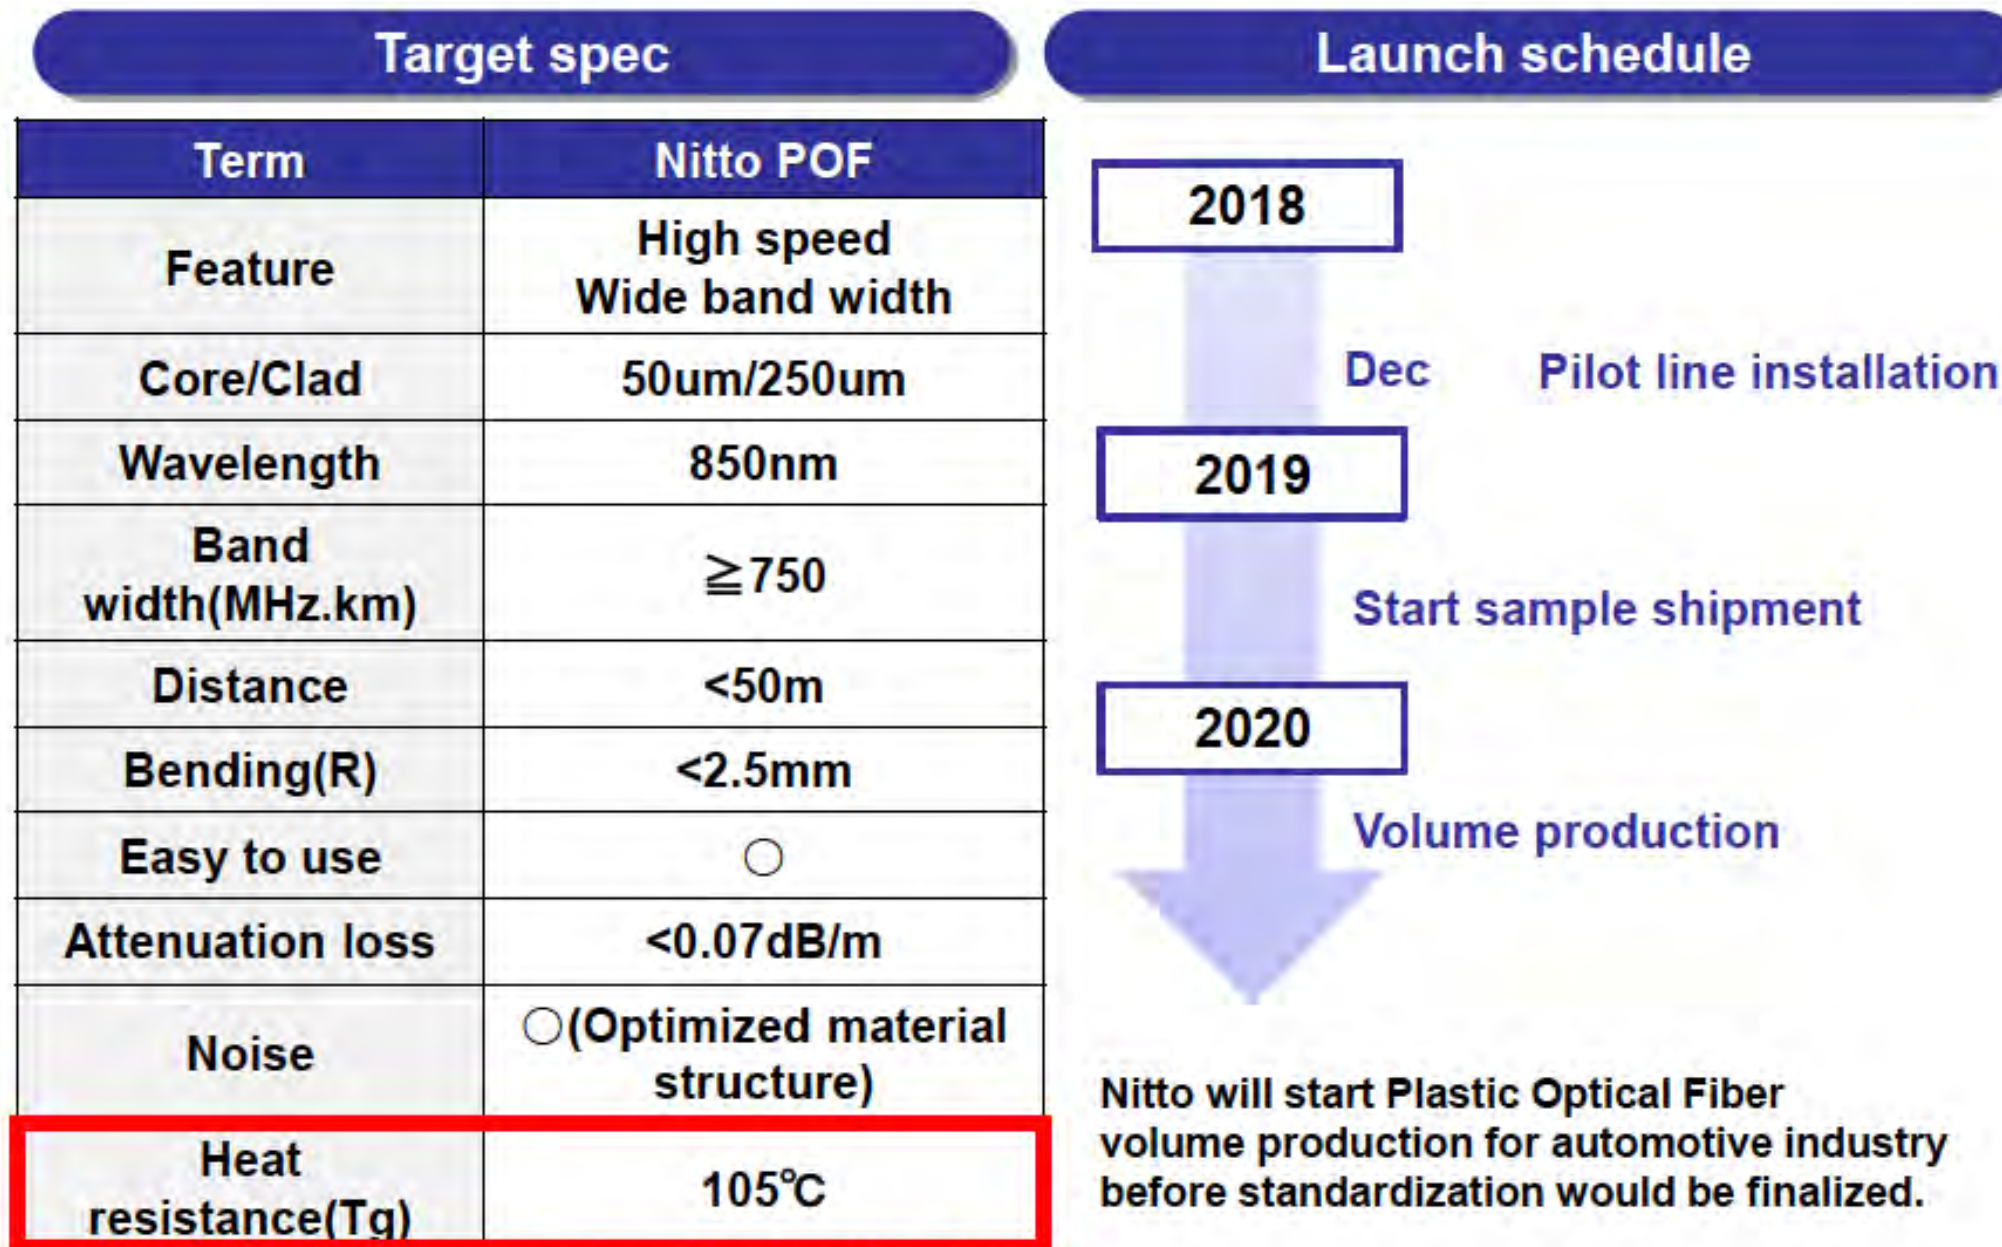

*These will be our target value and would subject to change.

Source: Takahashi, Tadashi; Nitto

Possible fibres

Potential Glass Fibers for Automotive



200µm HCS Fiber with ETFE Buffer

Temperature: -65 °C to +125 °C
BW: ≥ 5 MHz-km @ 850 nm per IEC Standard
Attenuation: ≤ 6 dB/km @ 850 nm
Bend Radius: ≥ 16 mm

GI HCS Fiber with ETFE Buffer

Temperature: -65 °C to +125 °C
BW: ≥ 400 MHz-km @ 850 nm (depending on core size)
Attenuation: ≤ 2.8 dB/km @ 850 nm (depending on core size)
Bend Radius: ≥ 16 mm

50/125 Standard GI Fiber



Temperature: -65 °C to +85 °C
BW: ≥ 4700 MHz-km @ 850 nm (depending on type and launch)
Attenuation: ≤ 2.2 dB/km @ 850 nm
Bend Radius: 17 mm



Fibres for long vehicles

- Automotive Optical Ethernet can support longer link lengths


Even with 10 gigabit or over communication, it is possible to freely arranged with 50m optical harness.

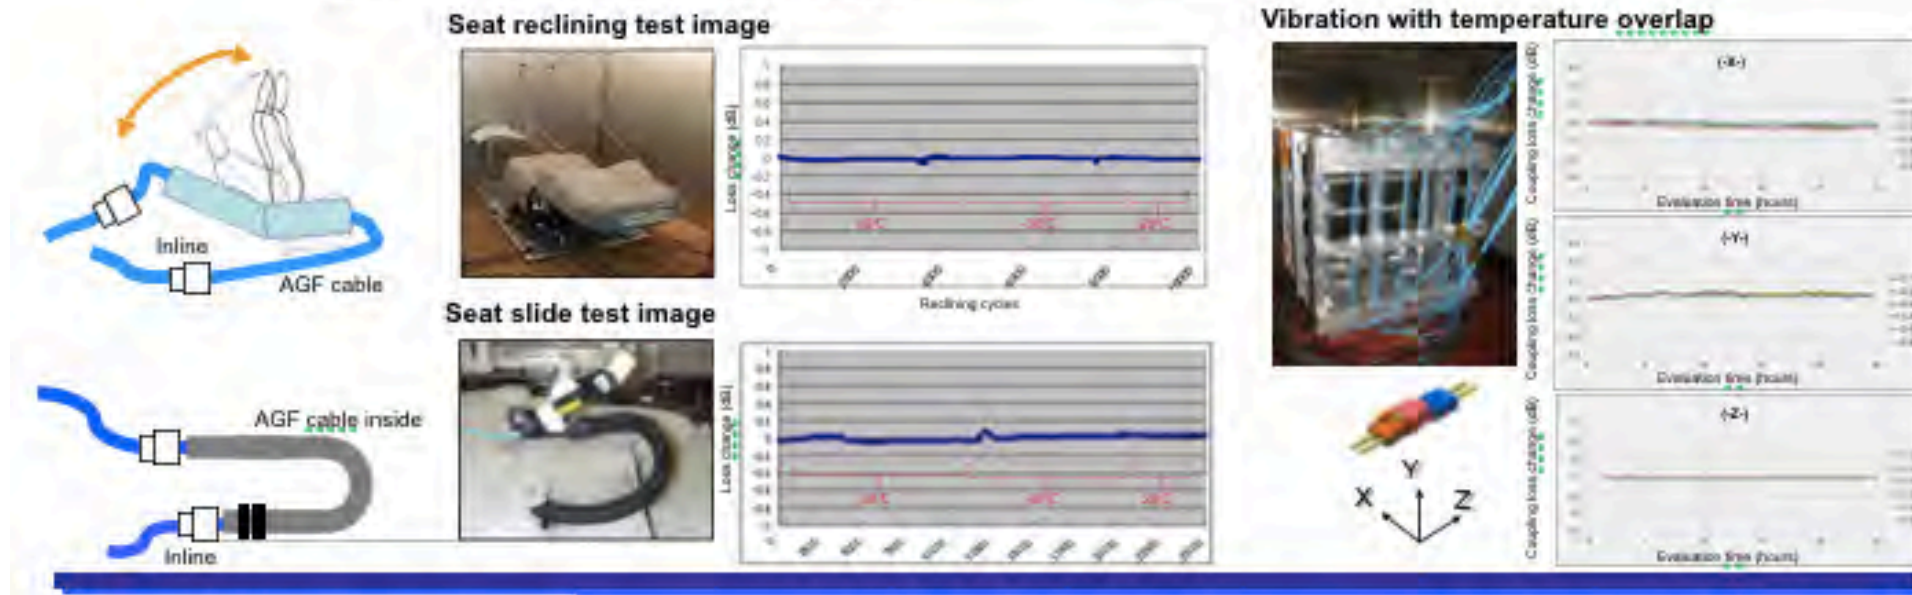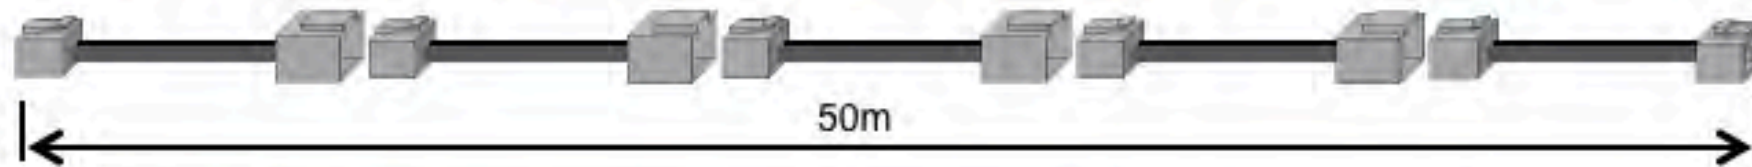

Source: Hayato Yuki, Sumitomo Electric

Connectors

- Connector suppliers are in advanced development of Multi-gig optical connectors

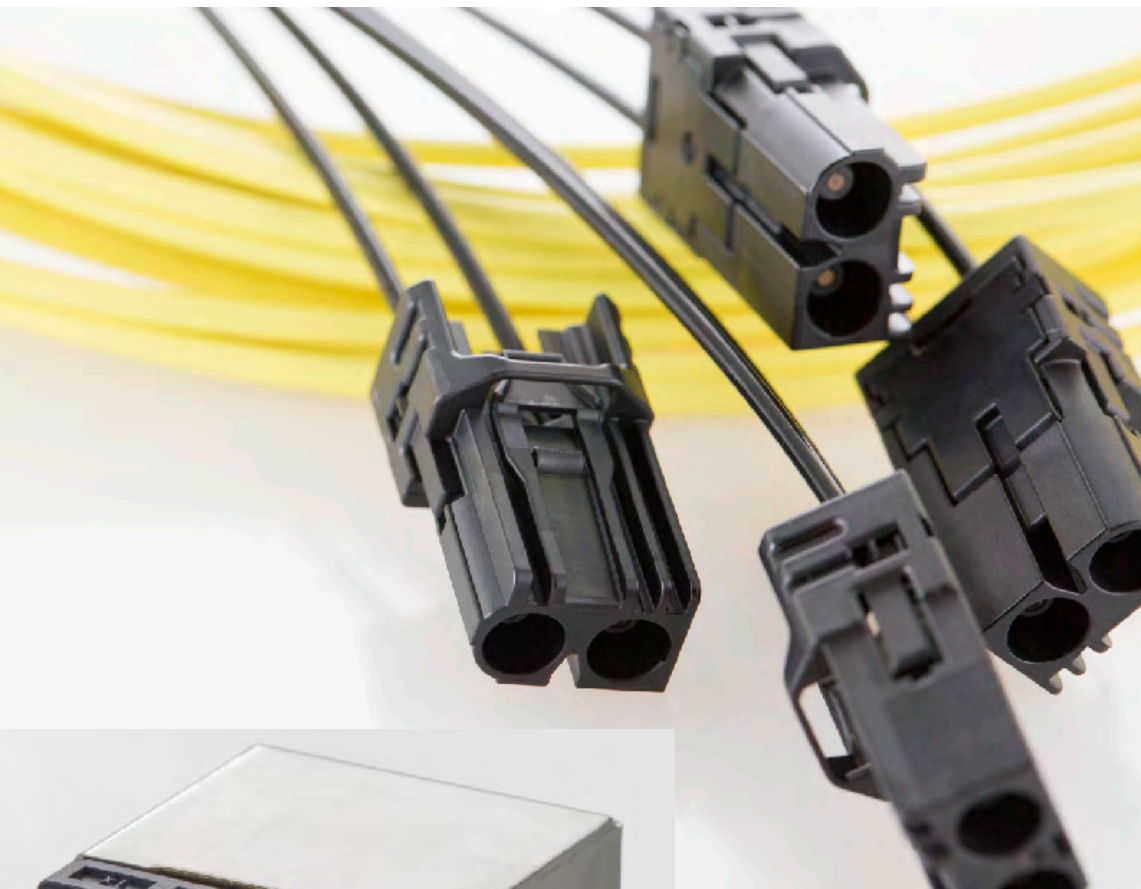

Plug Assy(Silica fibre)



FOT(TX RX)



PHY and devices, VCSEL, PD, TIA and driver for FOT come from consumer market

Source: Shoji Kawashima, TE Connectivity;
Tomohiro Kikuta, Adamant Namiki

Source: Ulrich Kleymann, Yazaki

Optical devices

- VCSELs and PD are being qualified for Automotive applications
 - Reducing current density of VCSEL
 - Using more robust PD architectures

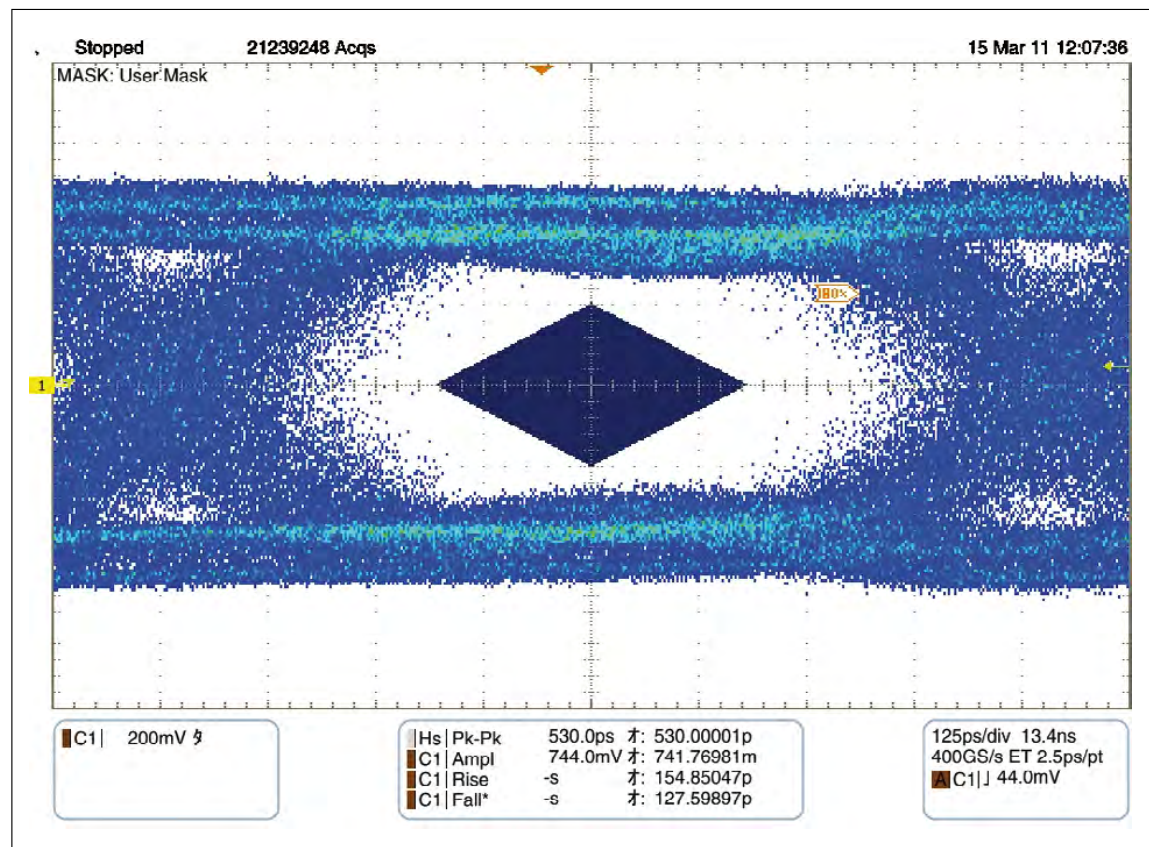


Figure 1. Eye pattern at -20 dBm (850 nm VCSEL), PCF (200 μ m diameter), GaAs PD (200 μ m diameter).

(Source: Hamamatsu Photonics)


Source: Takayuki Suzuki
Hamamatsu Photonics




Different bit rates and receivers

10


30GHz linear receiver
(evaluation of the optical eye)

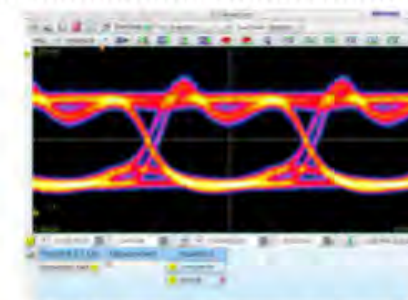


105°C 3 mA Vpp=0.15V 5 Gb/s

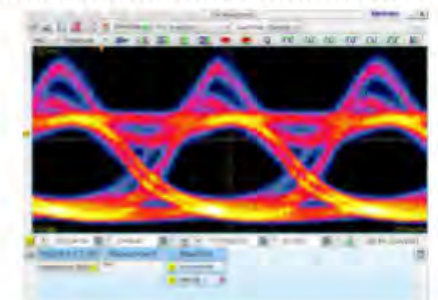

10 Gb/s

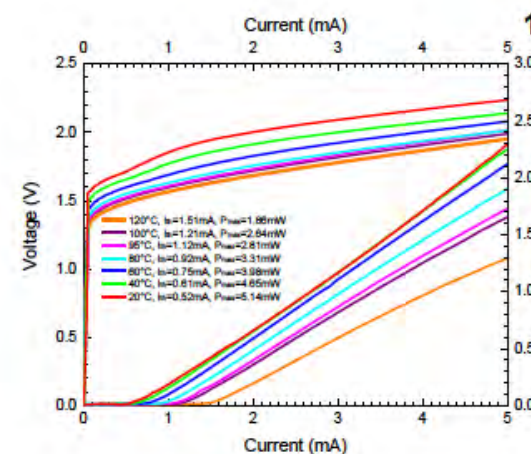

VIS 40G ROSA
35GHz limiting TIA
(evaluation of electrical eye)

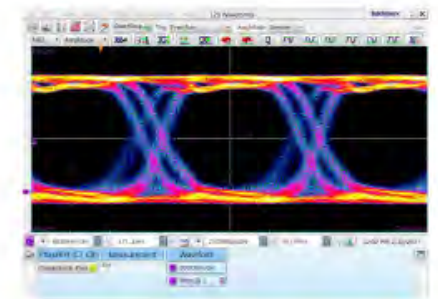

105°C 3 mA Vpp=0.15V 10 Gb/s

→ Reliable electrical eye at 10 Gb/s 3mA 105°C

Presentation for IEEE 802.3 Multi-Gig Automotive Ethernet PHY Study Group

VI Systems GmbH

http://www.ieee802.org/3/NGAUTO/public/adhoc/Kropp_NGAUTO_0317.pdf

Market potential

Why now ?

- Demo cars are using 10GBASE-SR links in anticipation of a multi-gig Automotive Optical Ethernet standard.
- First car with multi-gig optical links is planned for 2025. OEMs are requesting a automotive qualified optical solution
- 1000BASE-RH already qualified and in production for 2020
- Industry suppliers are ready to provide automotive qualified components

Supporters by affiliation

OEMs

- Hideki Goto - TMC
- Takashi Yasuda - TMC
- Doarte Goncalves - PSA
- Samuel Sigfridsson - Volvo Cars
- Jerker Fors - Volvo Cars
- Michael Kaindl - BMW
- Natalie A. Wienckowski - GM

Automotive component suppliers (TIER-1 / TIER-2)

- Dr. Übbing - Leoni
- Daniel Wiesmayer - Dräxlmaier
- Christopher Müller - Valeo
- Masato Shiino - Furukawa Electric
- Masayuki Iwase - Furukawa Electric
- Mitsuhiko Mizuno - Denso
- Takashi Fukuoka - Sumitomo Electric
- Hayato Yuki - Sumitomo Electric
- Kazuya Takayama - Nitto Denko
- Tadashi Takahashi - Nitto Denko
- Andreas Engel - TE
- Richard Orosz - Yazaki

- Ulrich Keymann - Yazaki
- Allan Zhu - Huawei Technologies
- Xuehuan Wang - Huawei Technologies
- Tomoo Takahara - Fujitsu
- Hideki Isono - Fujitsu
- Steven E. Swanson - Corning
- John S Abbott - Corning
- Alexander Umnov - Corning
- Mabud Choudhury - OFS
- Yoshihiro Niihara - Fujikura Ltd.

Other

- Tomohiro Kikuta - Adamant Namiki
- Yasuhiro Hyakutake - Adamant Namiki
- Satoshi Takahashi - POF Promotion
- Bob Grow - RMG Consulting
- Manabu Kagami - NIT

Straw polls

- Should a study group be formed for “Optical multi-gig PHY for automotive applications”?
 - Y: N: A:
 - Room:

- I would participate in a “Optical multi-gig PHY for automotive applications” study group
 - Tally:

- I believe, my affiliation would support my participation in a “Optical multi-gig PHY for automotive applications” study group
 - Tally:

Next steps

- Ask 802.3 at Thursday's closing meeting to form study group
- If approved:
 - Request 802 EC to approve creation of the study group on Friday
 - First study group meeting would be during September 2019 IEEE 802.3 interim meeting