

IEEE 802.3 NEA Ad hoc 28 Sept 2020

IEEE 802.3 Call for Interest
CFI Consensus Presentation
Draft Development

“Beyond 400 Gb/s Ethernet”

John D'Ambrosia
Futurewei Technologies
U.S. Subsidiary of Huawei



OBJECTIVE FOR THE MEETING

- To measure the interest in starting a study group to address “Beyond 400 Gb/s Ethernet”
- We don't need to
 - Fully explore the problem
 - Debate strengths and weaknesses of solutions
 - Choose any one solution
 - Create PAR or five criteria
 - Create a standard or specification
- Anyone on the call may speak / vote
- RESPECT... give it, get it

Contributors

- John D'Ambrosia, Futurewei, U.S. Subsidiary of Huawei
- Matt Brown, Huawei Canada
- Joel Goergen, Cisco
- Mark Gustlin, Cisco
- Cedric Lam, Google
- Mike Li, Intel
- Shawn Nicholl, Xilinx
- David Piehler, Dell-EMC
- Ted Sprague, Infinera
- Rob Stone, Facebook
- Jim Theodoras, HG Genuine
- Nathan Tracy, TE Connectivity
- Tedros Tsegaye, Innolight
- Xinyuan Wang, Huawei
- Also
 - IEEE 802.3 2020 Ethernet Bandwidth Assessment
 - IEEE 802.3 NEA Ad hoc

DRAFT DEVELOPMENT - FINAL VERSION PENDING

Today's Panel

- **To be identified**

DRAFT DEVELOPMENT - FINAL VERSION PENDING

AGENDA


- **Introduction**
- **Presentations**
 - **Market Pressures for Beyond 400 GbE**
 - **The Technical Roadmap to Beyond 400 GbE**
 - **Beyond 400 GbE - Why Now?**
- **Straw Polls**
- **Future Work**

THE SCOPE OF ETHERNET TODAY

Scenario #1



Scenario #2

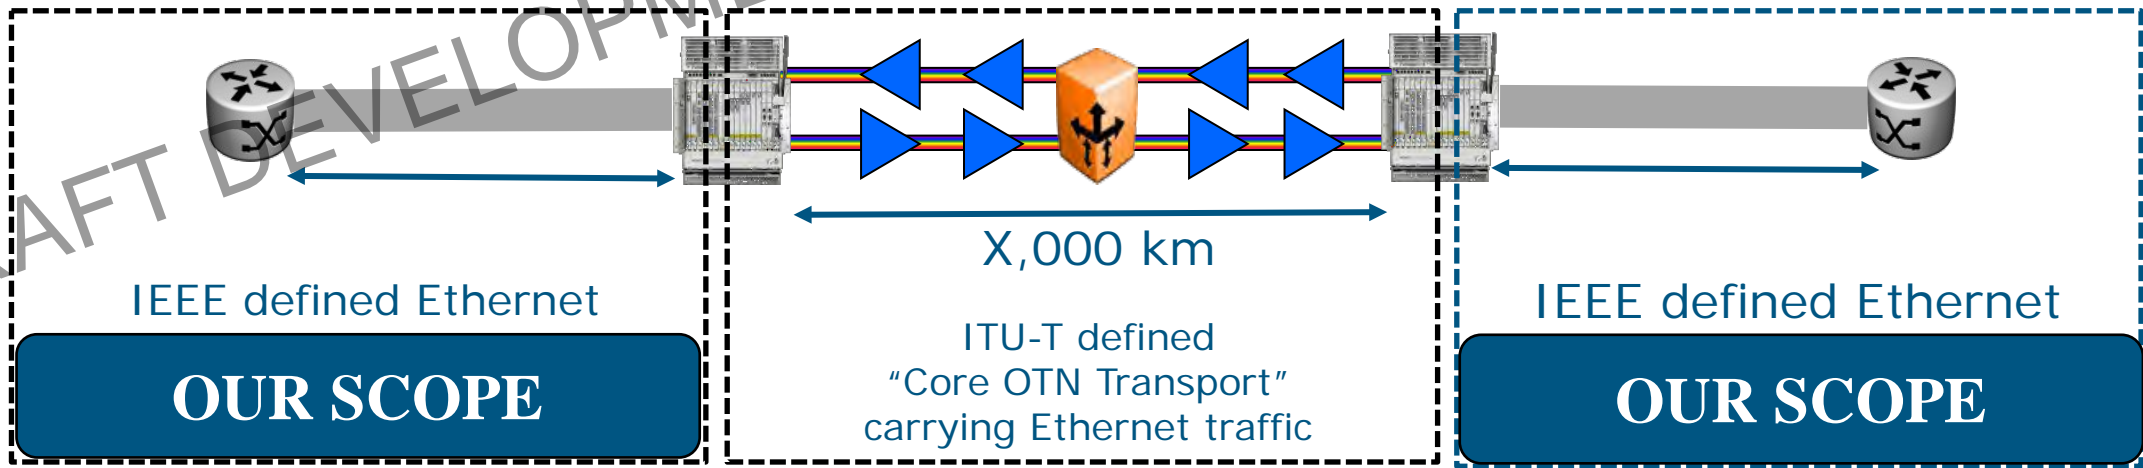

Potential for Technology Reuse

Reuse of signaling rate technologies developed for higher Ethernet rates enables existing lower speed Ethernet rate specifications (AUI, -KR, -CR, -SR, -DR, -FR, -LR, -ER)

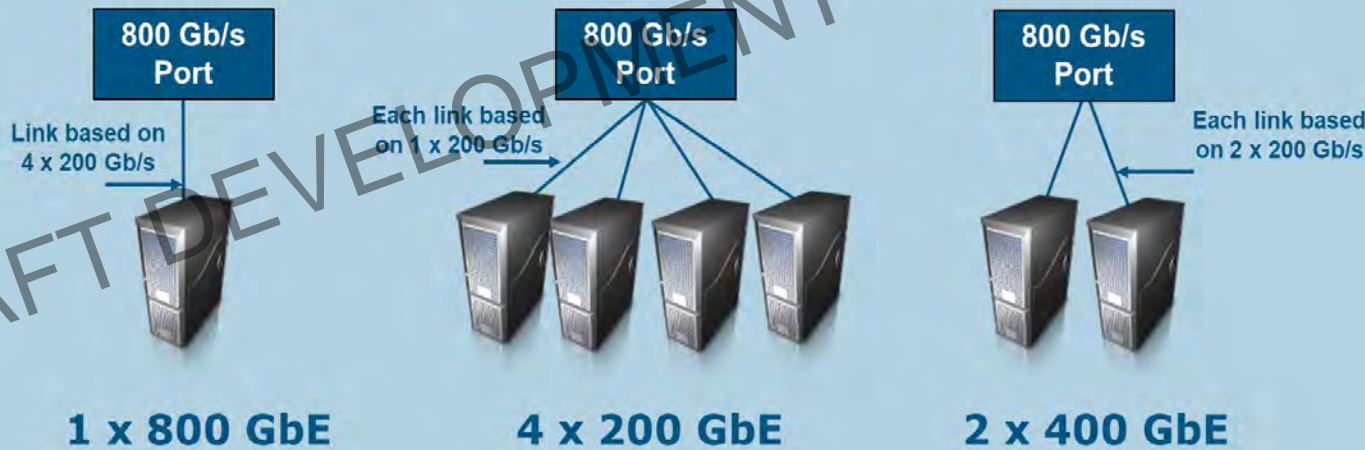


Image courtesy of David Piehler, Dell-EMC

- 32 400 Gb/s capacity ports
- Can be configured to support 32 400 GbE ports
- Can be configured to support 128 100 GbE ports

Possible Scenario – 800 GbE is developed based on 4 x 200 Gb/s

The 200 Gb/s signaling rate technology could be reused to support development of 200 GbE and 400 GbE physical layer specifications



Reuse of 200 Gb/s signaling rate technology could be applicable to:
AUIs, -KR, -CR, -SR, -DR, -FR, -LR, -ER, others?

“It has been my experience at Google that we have used optical and cu modules to support different configurations of a given port, including applications that require the maximum capacity of the single port.”

Cedric Lam, Google

TODAY


A POSSIBLE FUTURE

MARKET PRESSURES FOR BEYOND 400 GbE



DATA CENTERS CONTINUE AS A PRIMARY DRIVER

DC Traffic Continues to Grow Rapidly (Regular Servers)

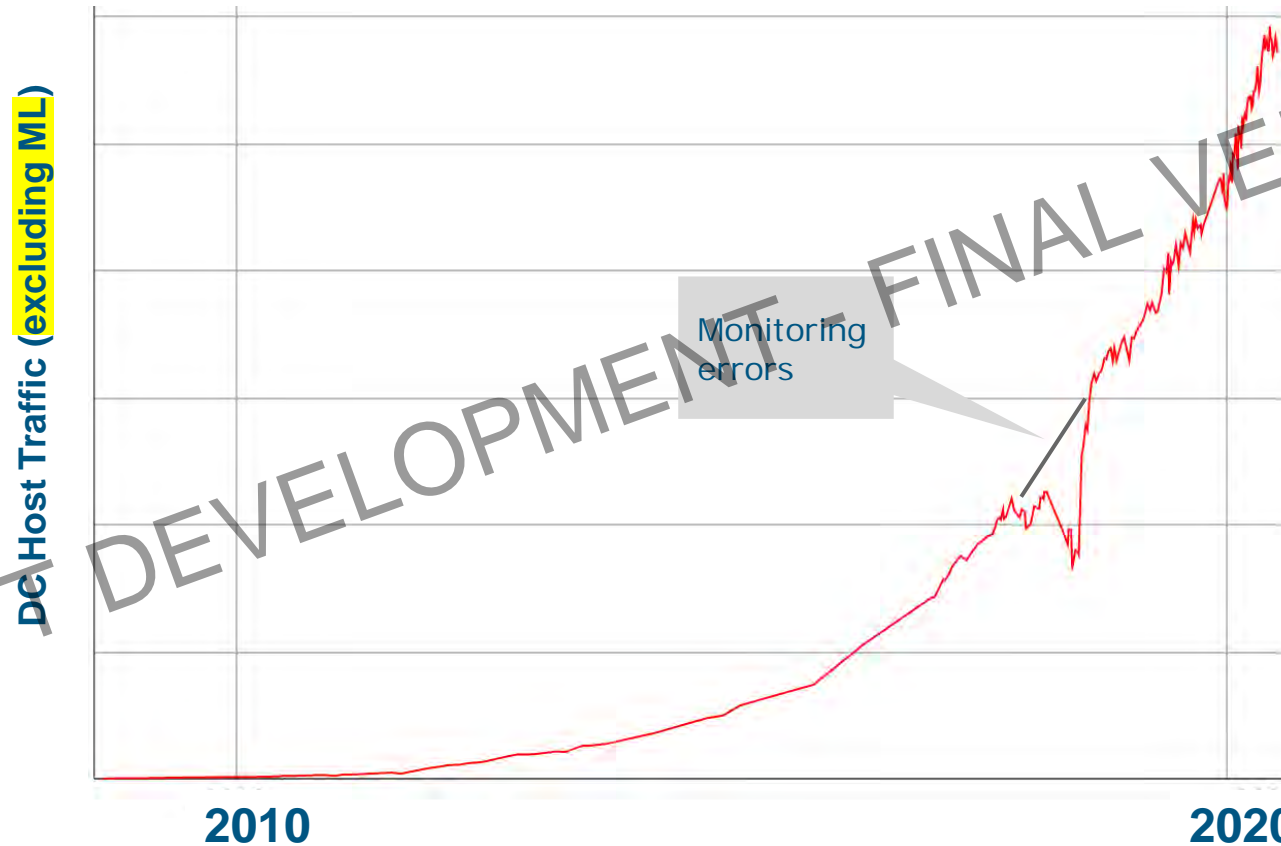

Google

Courtesy - Cedric Lam, Google


THE SONG REMAINS THE SAME

- 2020 Ethernet Bandwidth Assessment (BWA) documented latest analysis of industry bandwidth needs and driving factors

Increased # of users x Increased access methods and rates x Increased services = Bandwidth Explosion


- 2020 Ethernet BWA
 - Report - <https://bit.ly/802d3bwa2>
 - Tutorial – https://bit.ly/802d3bwa2_tut
- Reference slides in Appendix: Backup Slides

The 2020 Ethernet Bandwidth Assessment

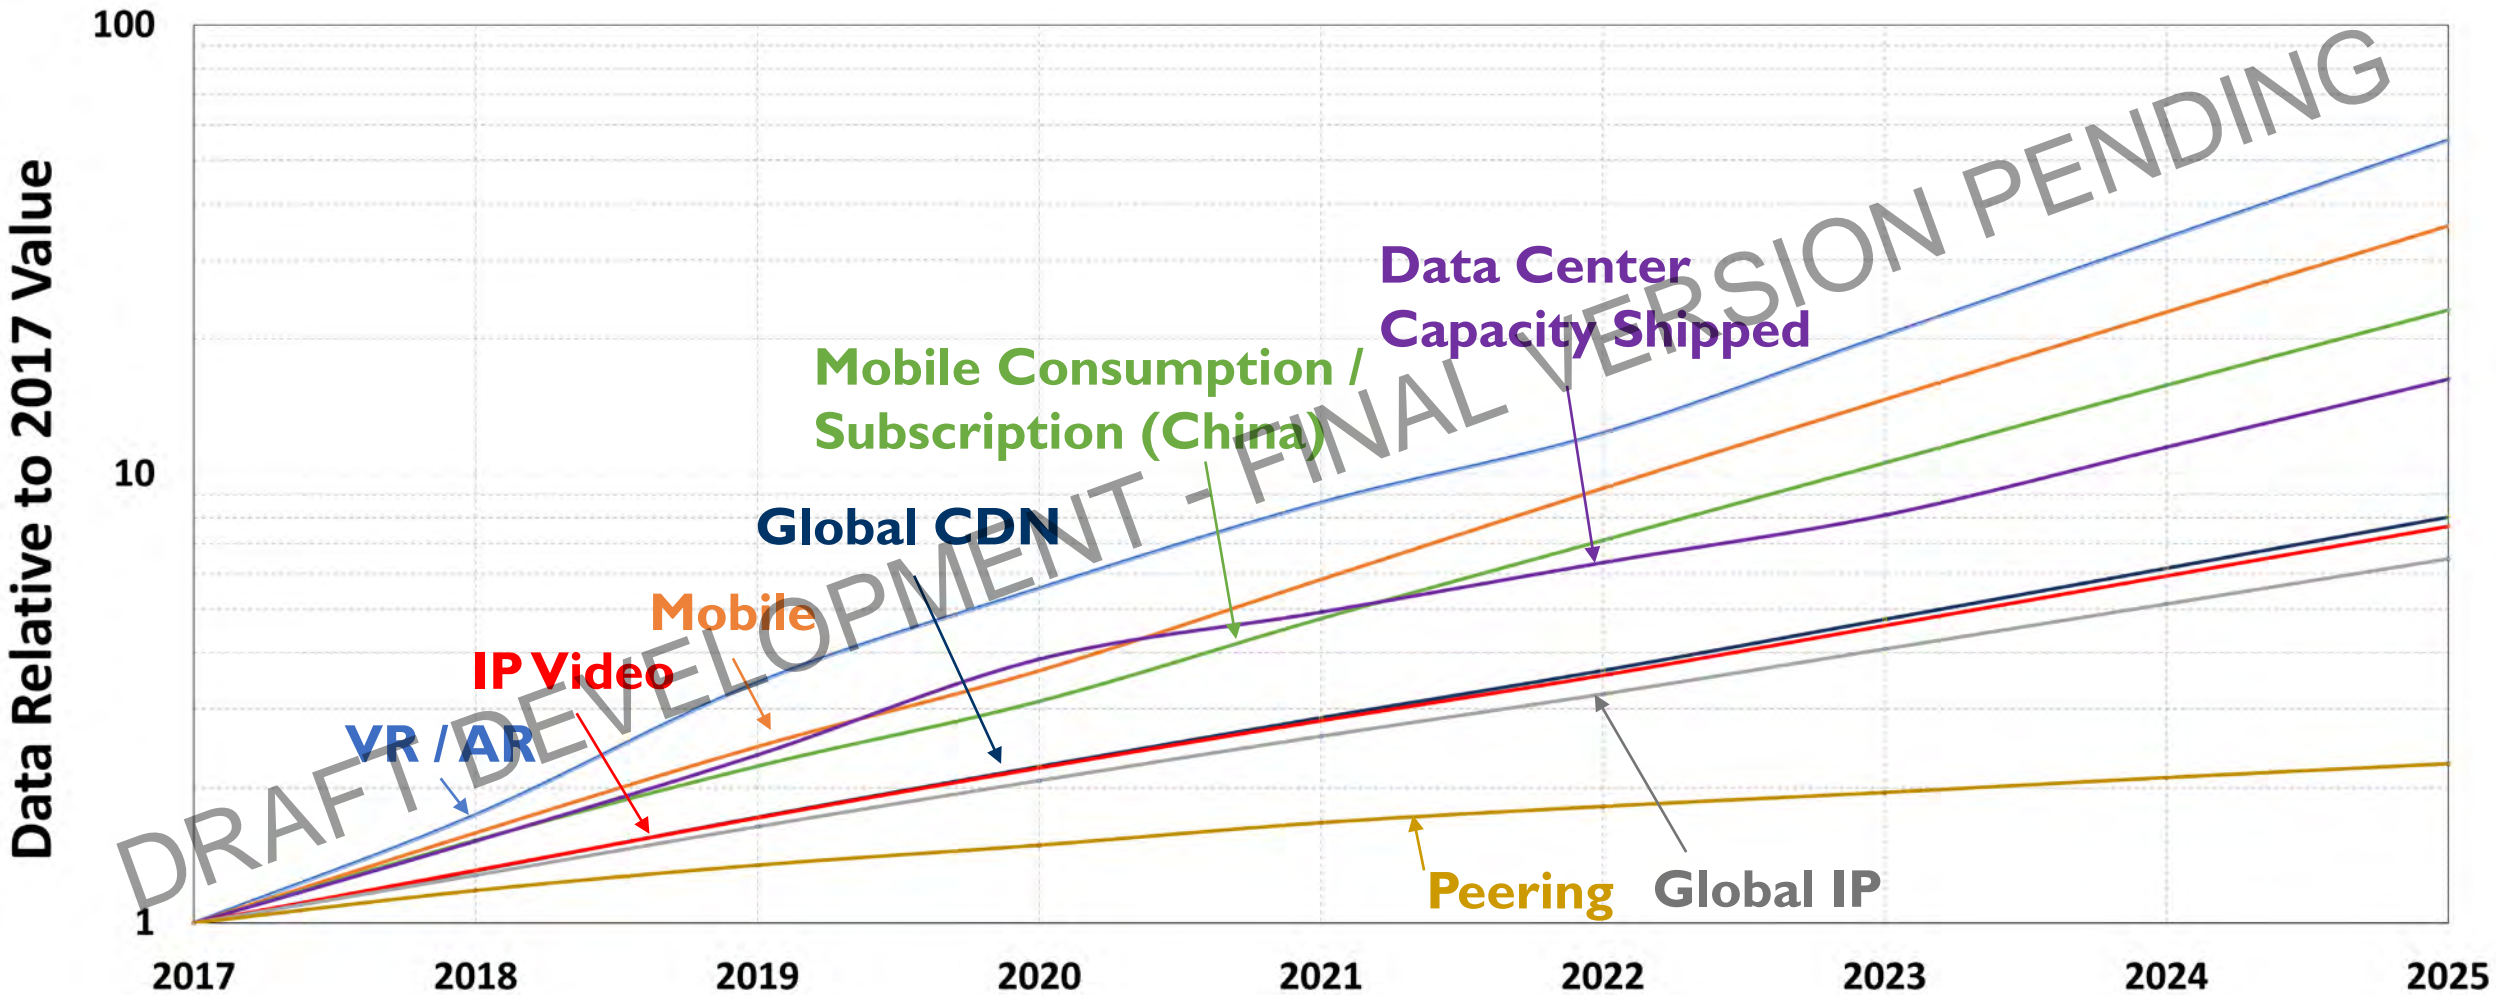

DRAFT DEVELOPMENT - FINAL VERSION PENDING


EXAMPLE EMERGING APPLICATION – 5G BACKHAUL

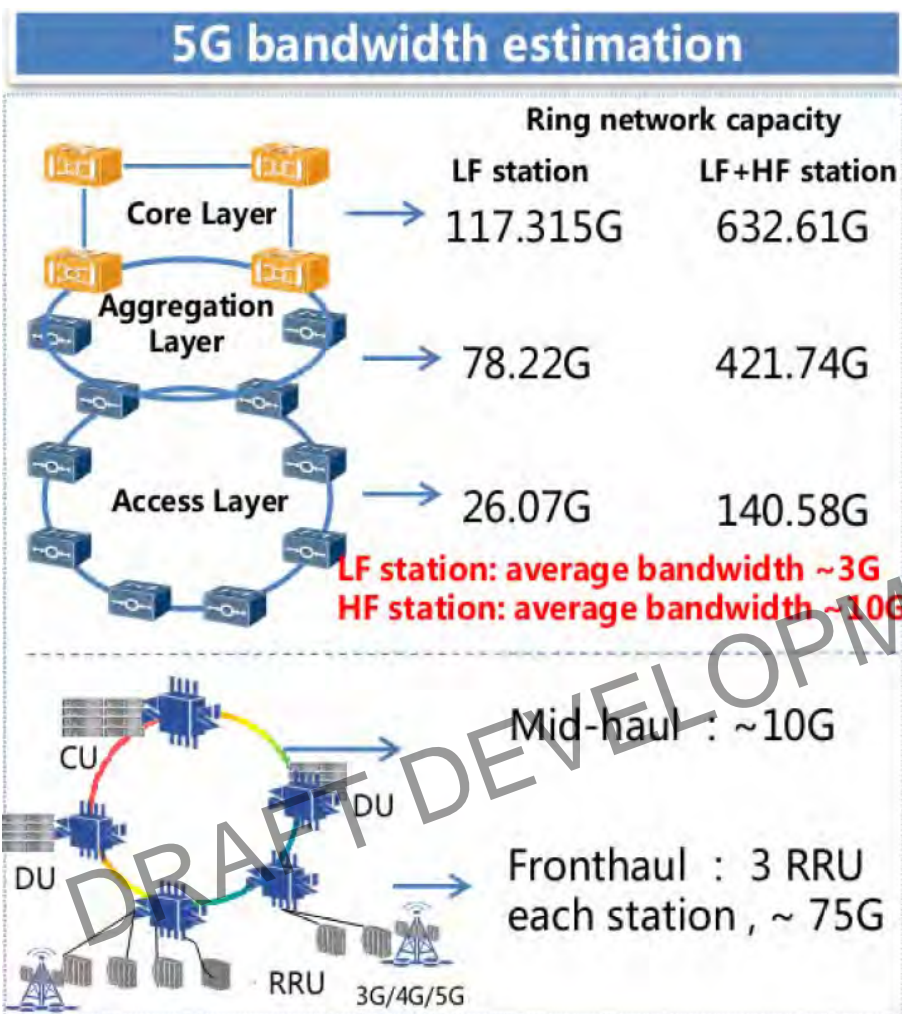

Source: http://www.ieee802.org/3/B10K/public/18_01/wang_b10k_01b_0118.pdf

	LTE	LTE Advanced	5G
Africa	145	42	4
Asia & Pacific	162	74	29
Eastern Europe	93	59	14
Latin America & Caribbean	127	50	8
Middle East	44	29	12
U S & Canada	20	11	7
Western Europe	88	70	31
Global Totals	683	335	105


Source: as of 8/14/2020, <https://www.5gamericas.org/resources/deployments/>

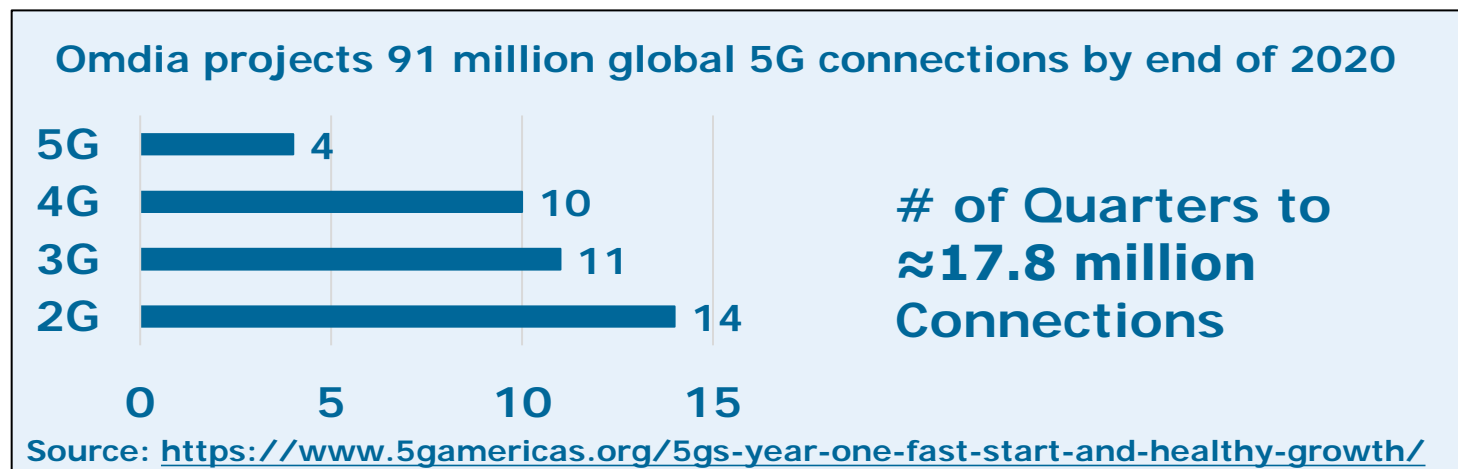

ARTIFICIAL INTELLIGENCE & COMPUTE


- **First Era (Before 2012)**
 - Moore's Law – 2-year doubling
 - Uncommon to use GPUs for machine learning
- **Modern Era (2012 and later)**
 - 2012 – 2014: most results used 1-8 GPUs rated at 1-2 TFLOPS
 - 2014 – 2016: large-scale results used 10-100 GPUs rated at 5-10 TFLOPS
 - 2016 – 2017: greater algorithmic parallelism (huge batch sizes, architecture search, expert iteration), specialized hardware (TPUs), faster interconnects

Two Distinct Eras of Compute Usage in Training AI Systems

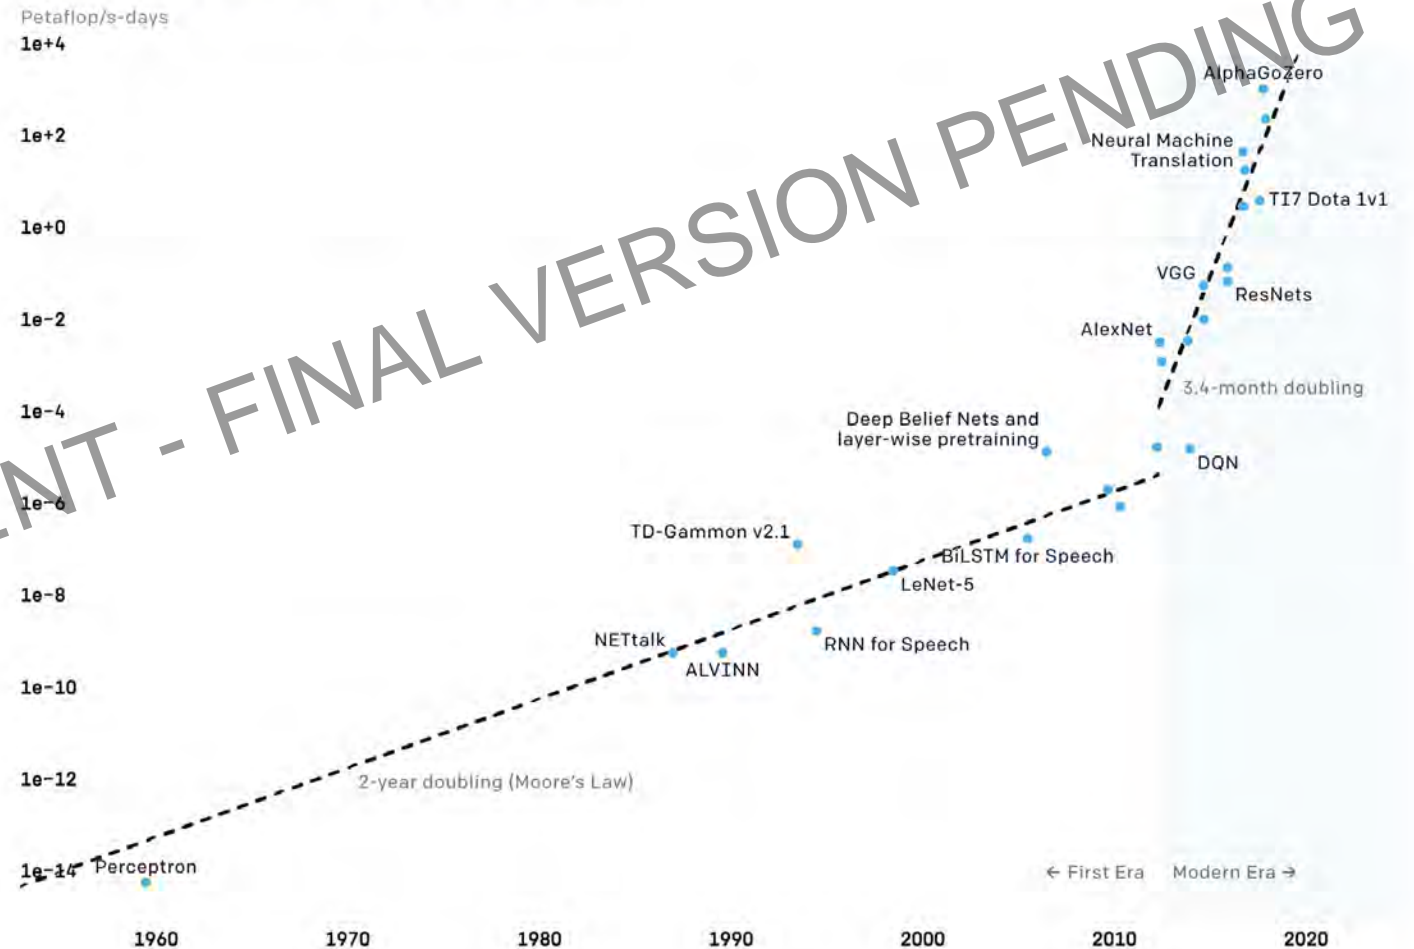

Source – OpenAI blog post ‘AI and Compute’ addendum ‘Compute used in older headline results’ posted 7th November 2019 by Girish Sastry, Jack Clark, Greg Brockman and Ilya Sutskever <<https://openai.com/blog/ai-and-compute/>>.

MORE OF THE SAME.....

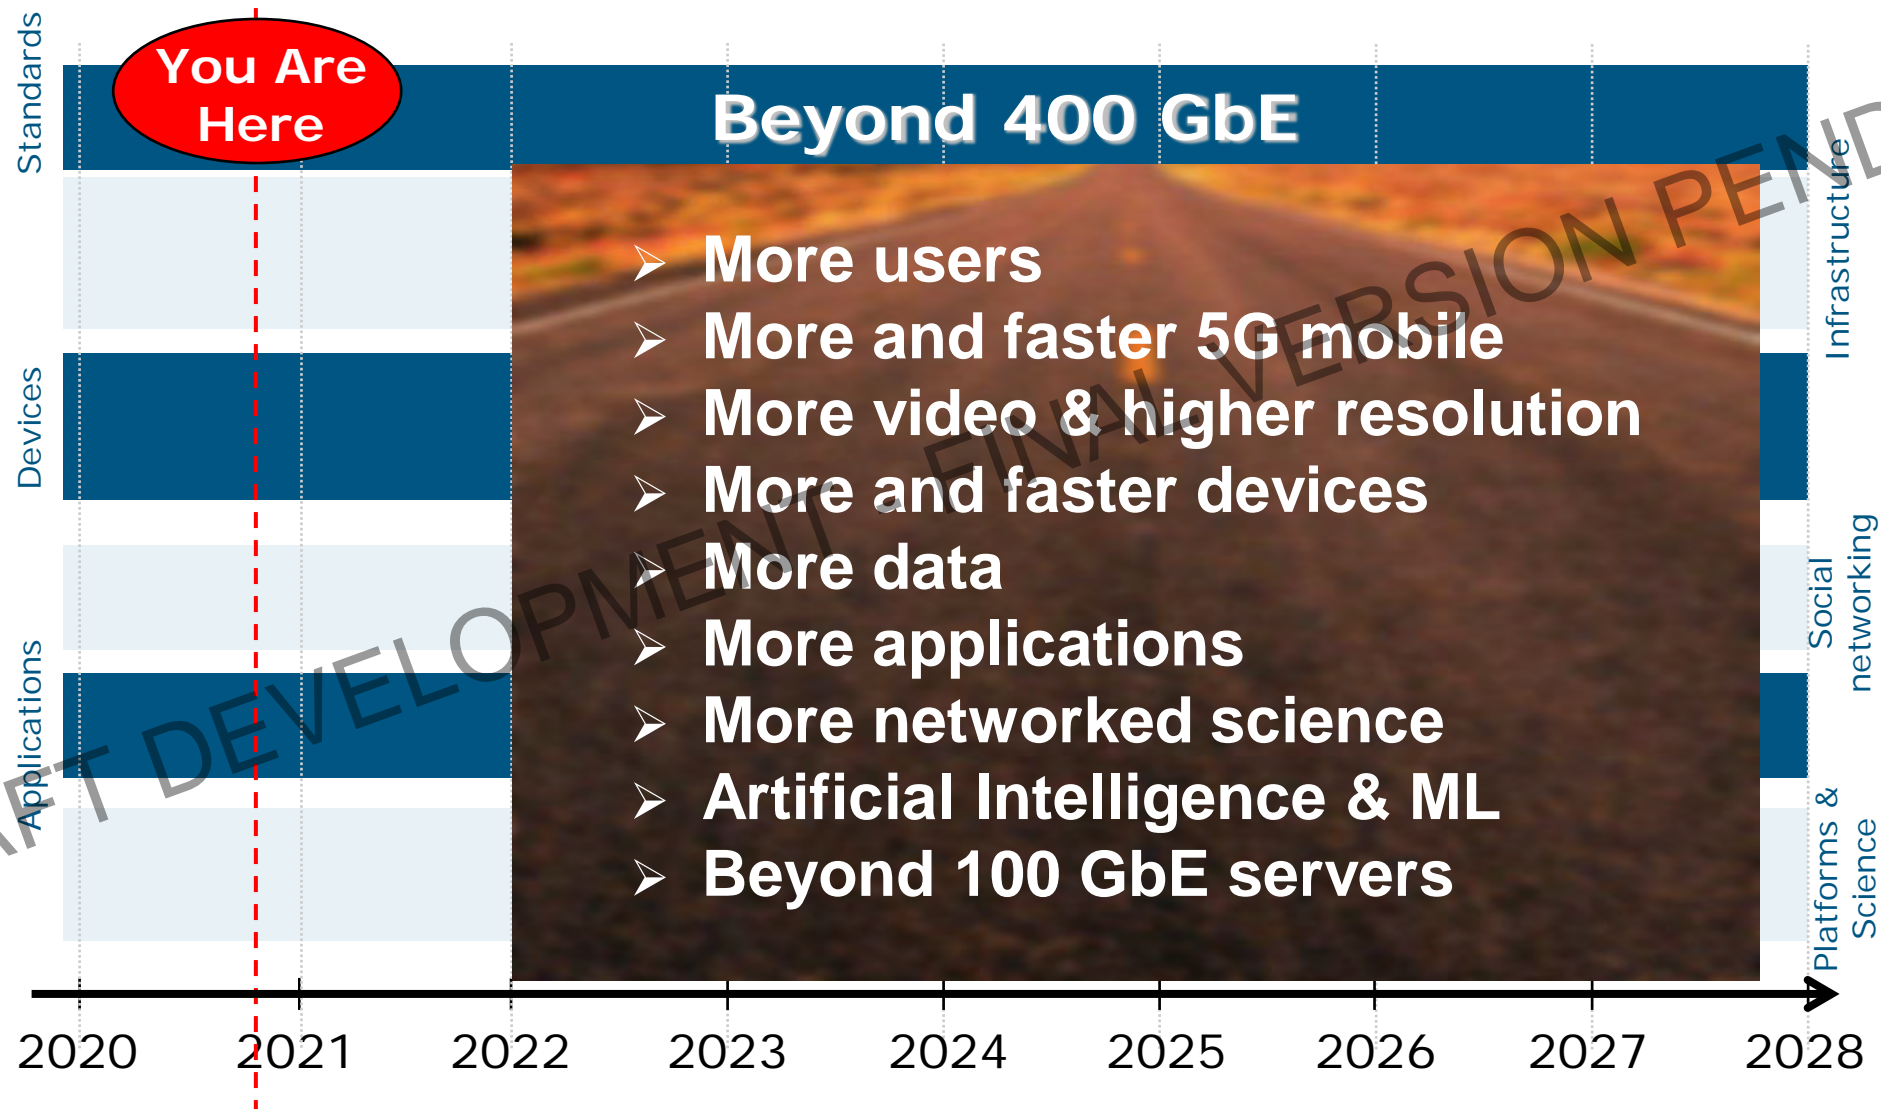

COVID-19 TRENDS, APRIL 2020



CAGR data from various industry sources and Inphi estimates

Source - Inphi blog post 'Bandwidth in the Age of COVID-19' posted 22nd April 2020 by Ford Tamer, President and CEO, Inphi Corporation <<https://www.inphi.com/blog/>>



SUMMARY

- **Bandwidth growth continues and underlying factors indicate further bandwidth growth**
 - **Video (recorded and live) and mobile!**
 - **Increasing delta between “peak” and “average”**
- **New applications fueling bandwidth growth**
- **In today’s COVID-19 world**
 - **Connectivity has been critical!**
 - **“Instantaneous” growth in multiple application spaces**
 - **Moving to telepresence, i.e. streaming video**
- **“Up and to the right” continues**

THE TECHNICAL ROADMAP TO BEYOND 400 GbE




Understanding the Typical Physical Challenges

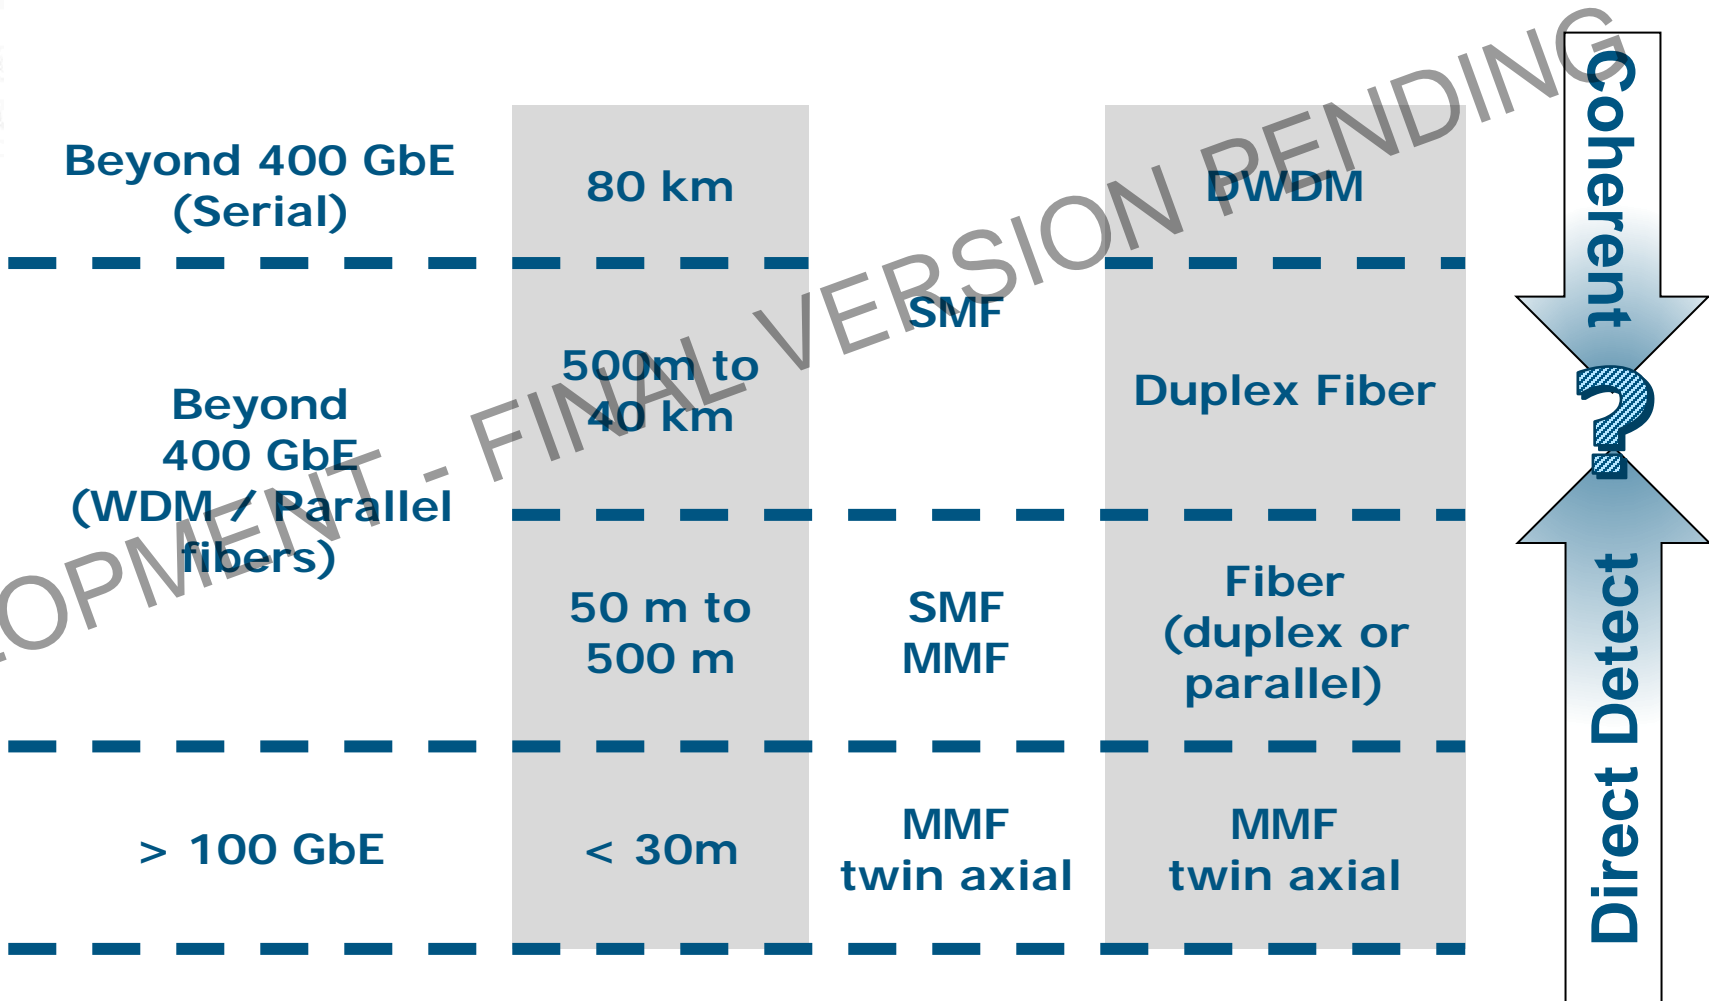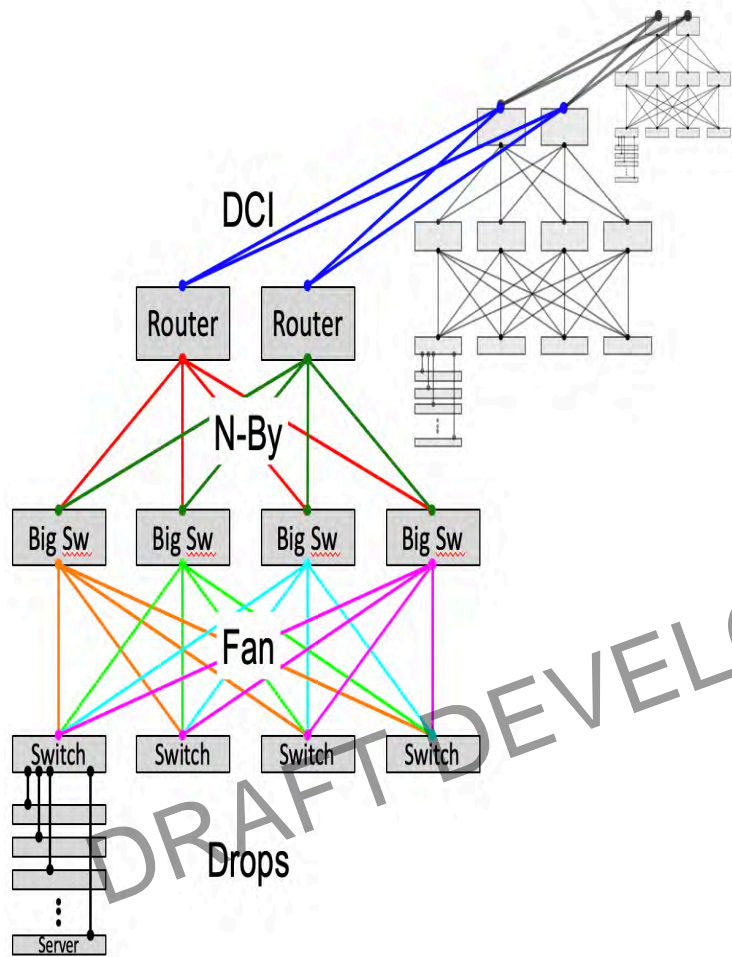

Beyond 400 GbE C2C / C2M AUI Development

Figure courtesy Jim Theodoras, HG Genuine

THE CHALLENGES TO BEYOND 400 GBE

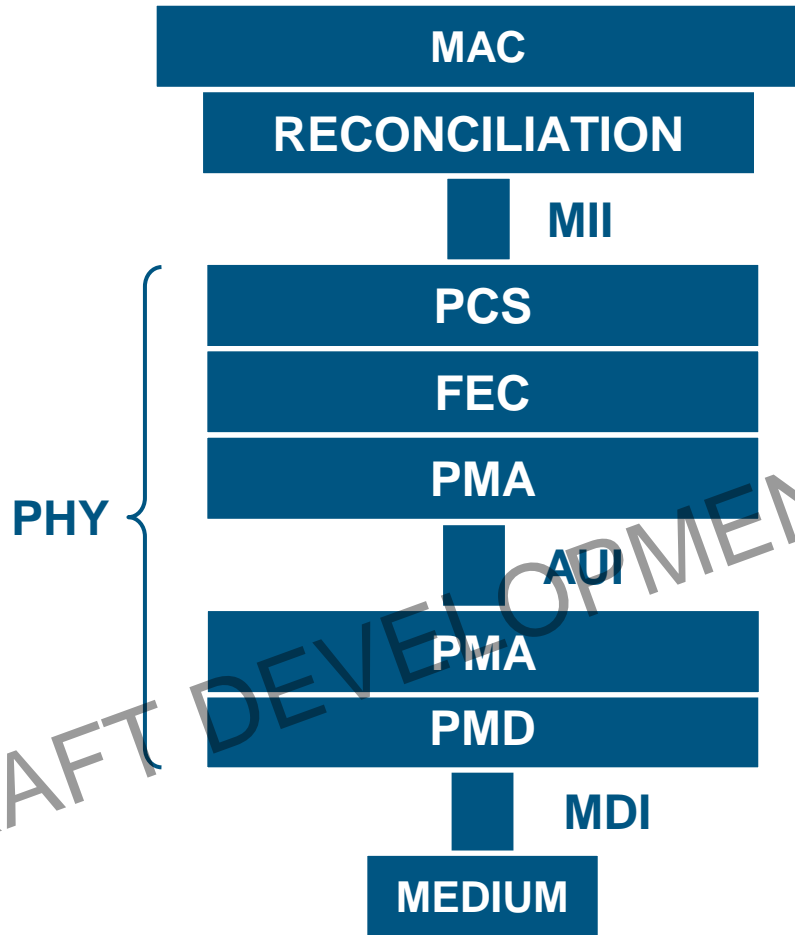

Forward Error Correction

- AUI Specific?
- PHY Specific?
- Multiple variants? Architecture impact?

Electrical Functions

- Increase interface channel count?
- Increase interface rate?
- Increase interface modulation order?

Optical Functions

- Increase interface channel count?
- Increase interface rate?
- Increase interface modulation order?

Media

- Increase interface channel count?
- Increase fiber count?
- Increase lambda count?
- Breakout?

MAC/PCS Technical Feasibility



- The options below are very feasible in near term technology (as an example, actual rate(s) are TBD)

MAC Rate	Technology Node	Device Type	Bus Width	Clock Rate
800 Gb/s	5 nm	ASIC	1024b	800 MHz
	5 nm	ASIC	512b	1.6 GHz
	7 nm	FPGA	1536b	533 MHz
1.6 Tb/s	5 nm	ASIC	2048b	800 MHz
	5 nm	ASIC	1024b	1.6 GHz
	5 nm (or equiv)	FPGA	3072b	533 MHz

Source – Mark Gustlin, Cisco; Mike Li, Intel; Shawn Nicholl, Xilinx


PCS/FEC

- Previous PCS concepts could be re-used
 - 64b/66b, transcoding, scrambling, AMs
- Will likely want a new stronger FEC for 200 Gb/s lane (if the project chooses to define 200 Gb/s per lane)
 - Multiple FEC options for direct detect, coherent light and longer reach coherent?
 - Still support end to end FEC for some options?
 - Optimize gain, latency, power and implementation burden for chosen FECs
 - While minimizing the overall number of FEC options

Source – Mark Gustlin, Cisco

CMOS Roadmap

Comparison of Lane Data Rate and Node Label Timelines

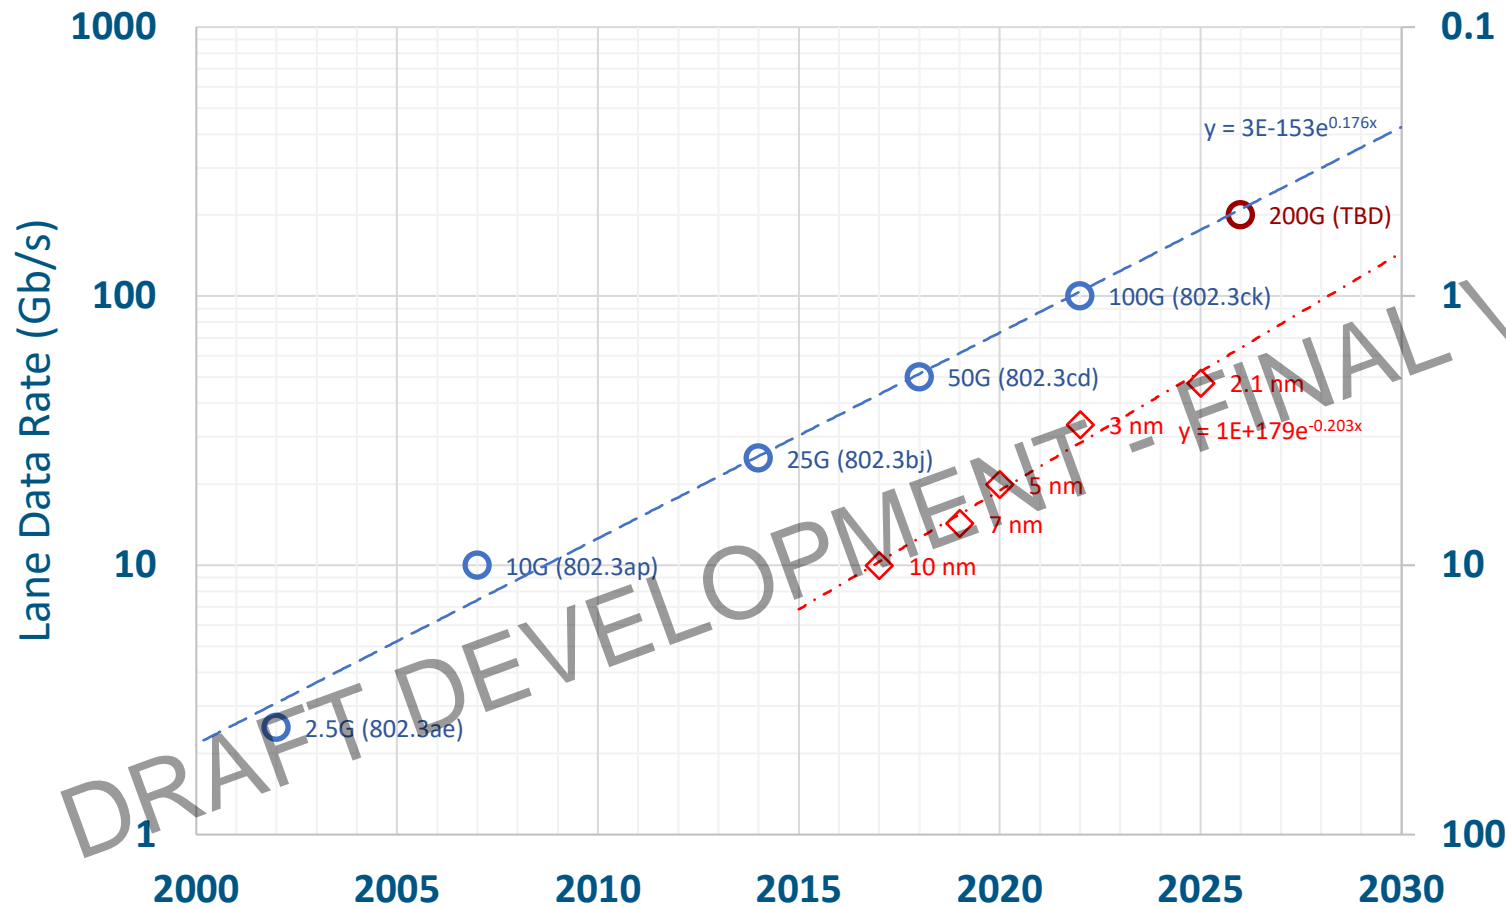

- The upper data (blue) shows evolution of electrical lane data rate over time.
- The lower data (red) shows the evolution of node label over time.
- Current designs for 100 Gb/s per lane are in 7 nm and are moving to 5 nm.
- 3 nm and 2.1 nm will be available when 200 Gb/s per lane is standardized.
- The node label (halving every 3.4 years) is progressing faster than the electrical lane rate (doubling every 3.9 years).


Source – Matt Brown, Huawei Canada

DSP Architecture Advances

**UNDER CONSTRUCTION
TO BE ADDED**

DRAFT DEVELOPMENT - FINAL VERSION PENDING

Beyond 400 GbE - Leveraging 100 Gb/s

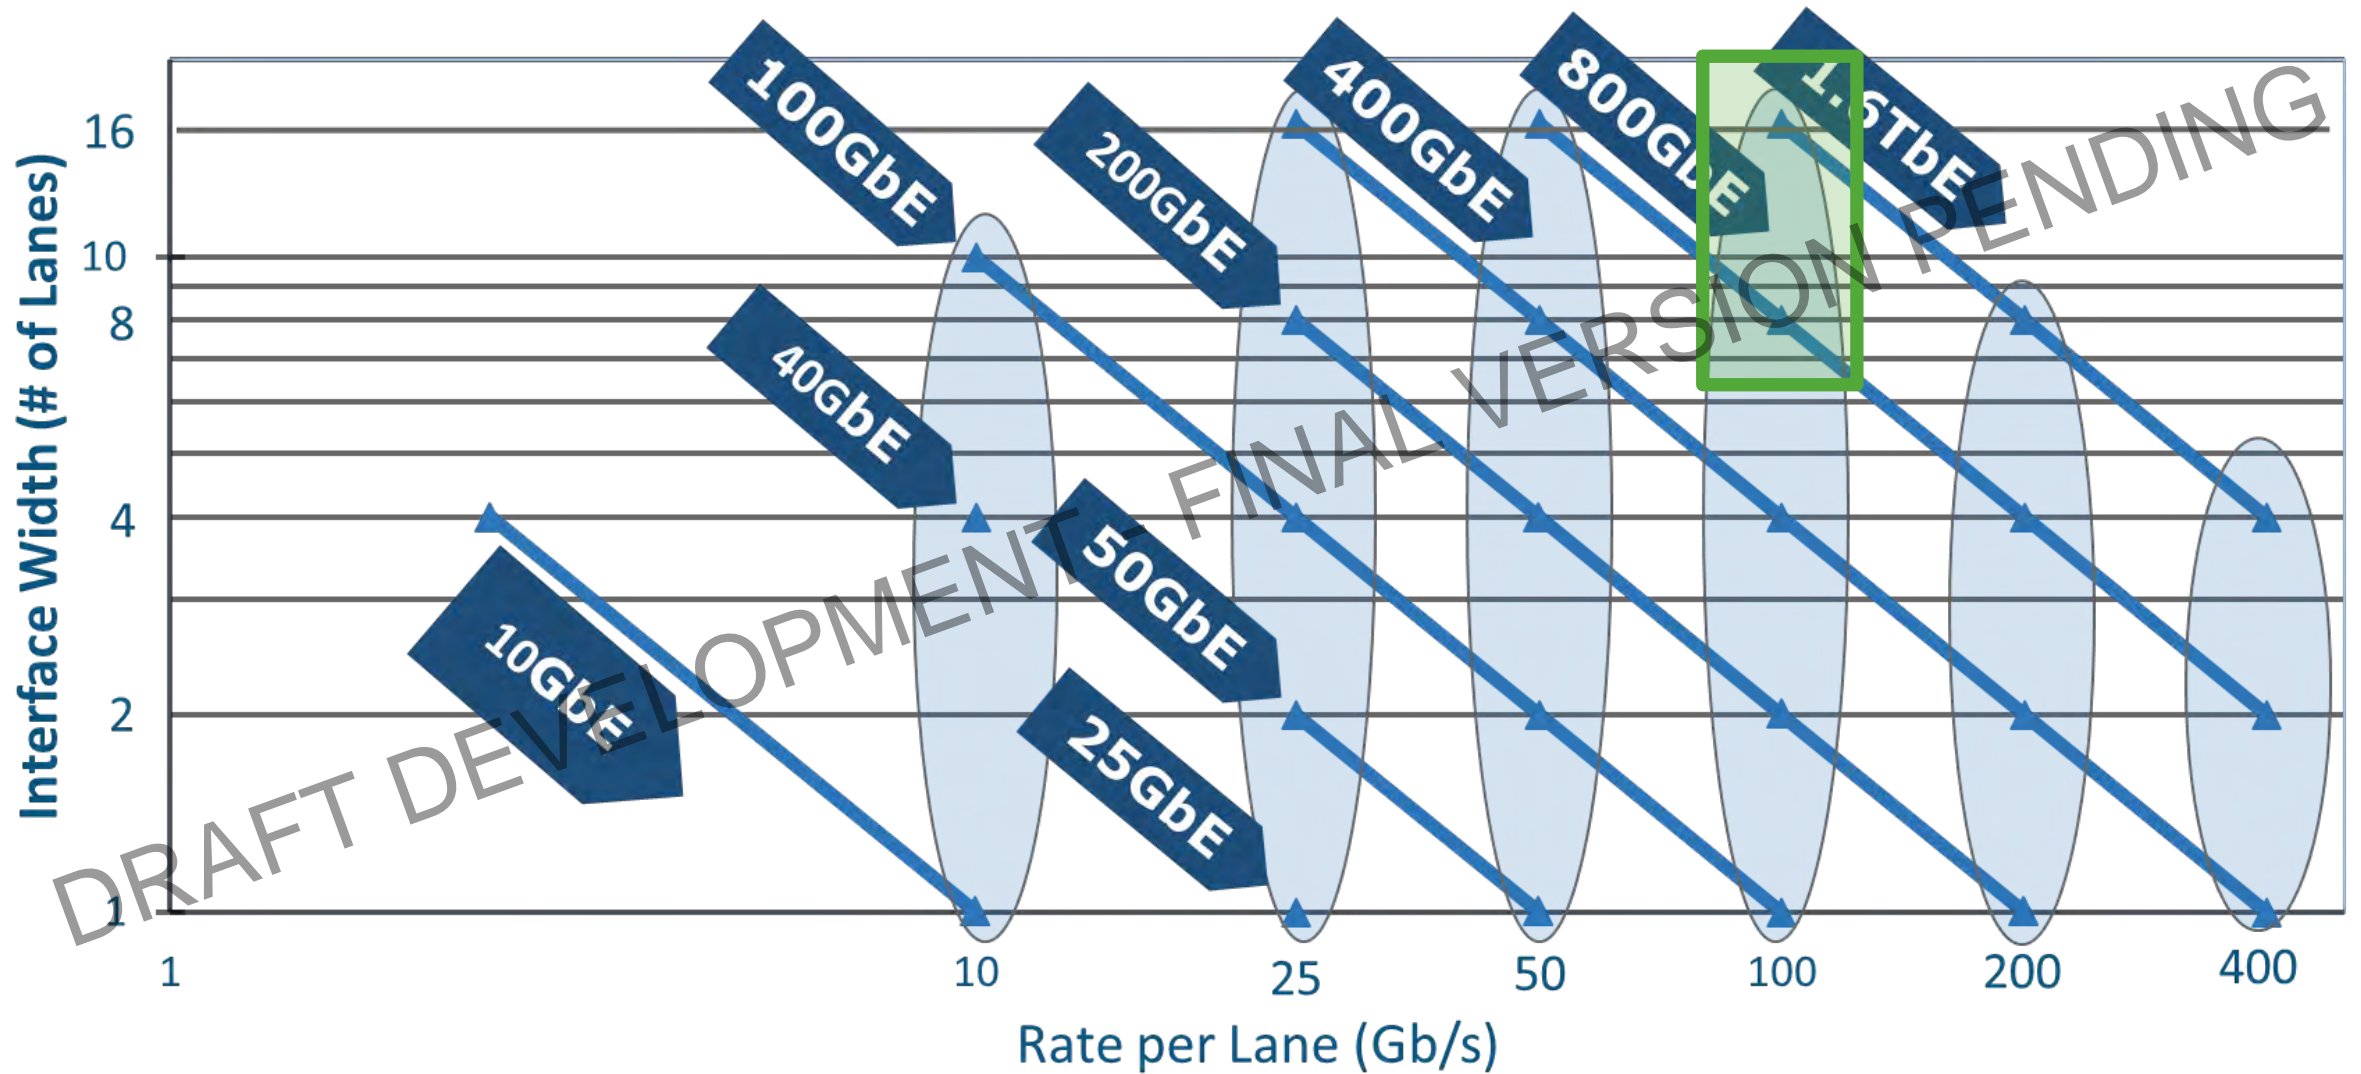

Industry Efforts - 100 Gb/s Signaling

➤ IEEE 802.3

➤ Standard – IEEE P802.3bs – 400GBASE-DR4 (4x100G)

➤ In Development

- IEEE P802.3ck 100 Gb/s, 200 Gb/s, and 400 Gb/s Electrical Interfaces Task Force
- IEEE P802.3cu 100 Gb/s and 400 Gb/s over SMF at 100 Gb/s per Wavelength Task Force
- IEEE P802.3db 100 Gb/s, 200 Gb/s, and 400 Gb/s Short Reach Fiber Task Force

➤ Other Industry Efforts

➤ OIF Common Electrical Interface 112G Efforts

➤ 100G Lambda MSA (100Gb/s optical interfaces specifications)

800 Gb/s Industry Activities

➤ Ethernet Technology Consortium

- <https://ethernettechnologyconsortium.org/>
- "The 800 GbE specification introduces a new media access control (MAC) and Physical Coding Sublayer (PCS)"


➤ QSFP-DD800 MSA

- <http://www.qsfp-dd800.net/>
- Rev 1.0 released Mar 6 2020

➤ OSFP


➤ 800G Pluggable MSA

- <https://www.800gmsa.com/>
- 800G PSM8 specification (Draft 1.0) - Specification covering cost effective 8x100G transmission over at least 100m

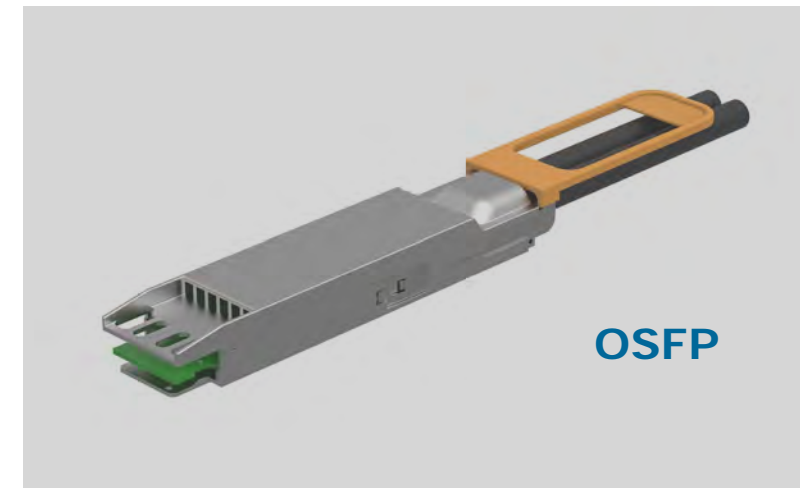


Source– Nathan Tracy, TE Connectivity

Example: 800 Gb/s OSFP Capacity Module

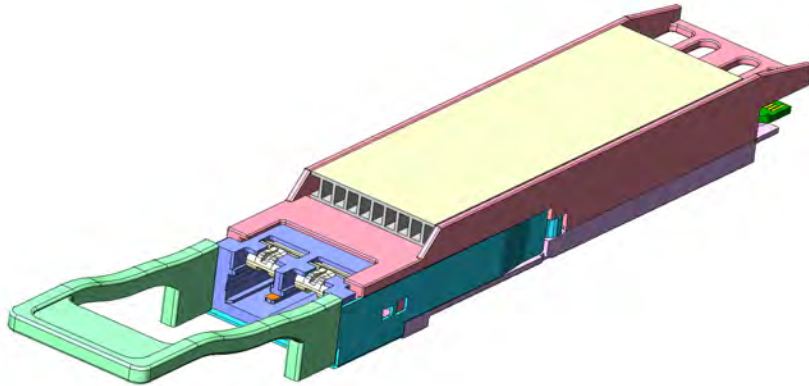


- OSFP Form Factor
- 8x100G DR8+ 2km with MPO-16 and 2x400G FR4 with CS connector
- OIF CEI-112G-VSR interface
- PMD spec follows 400G DR4+ and FR4. interoperable with 400G
- 0~70degC 18W, 10~60C 17W
- 7nm DSP inside

Source – Tedros Tsegaye, Innolight

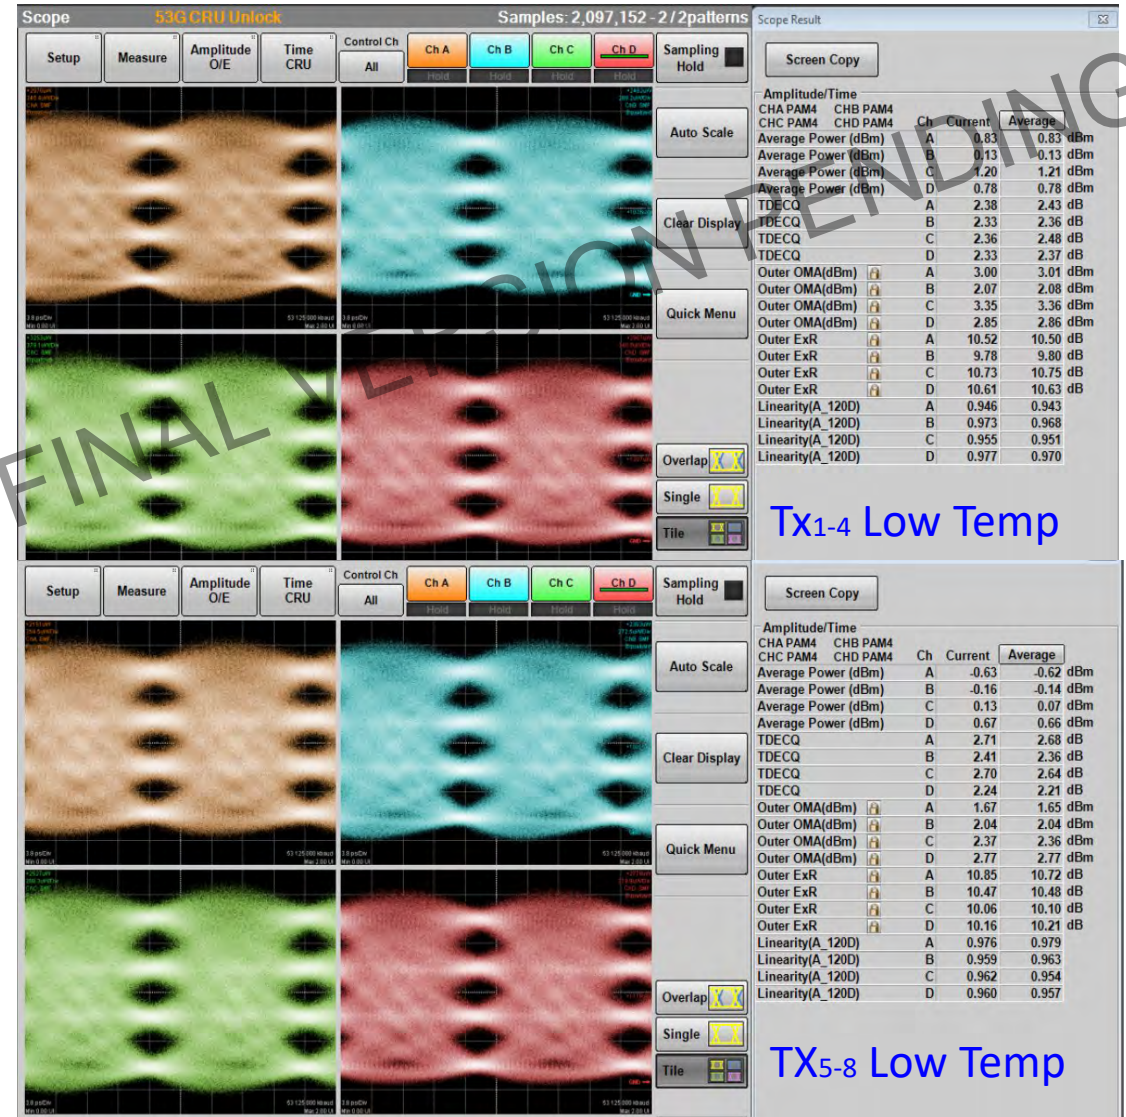

Beyond 400 GbE - Leveraging 200 Gb/s

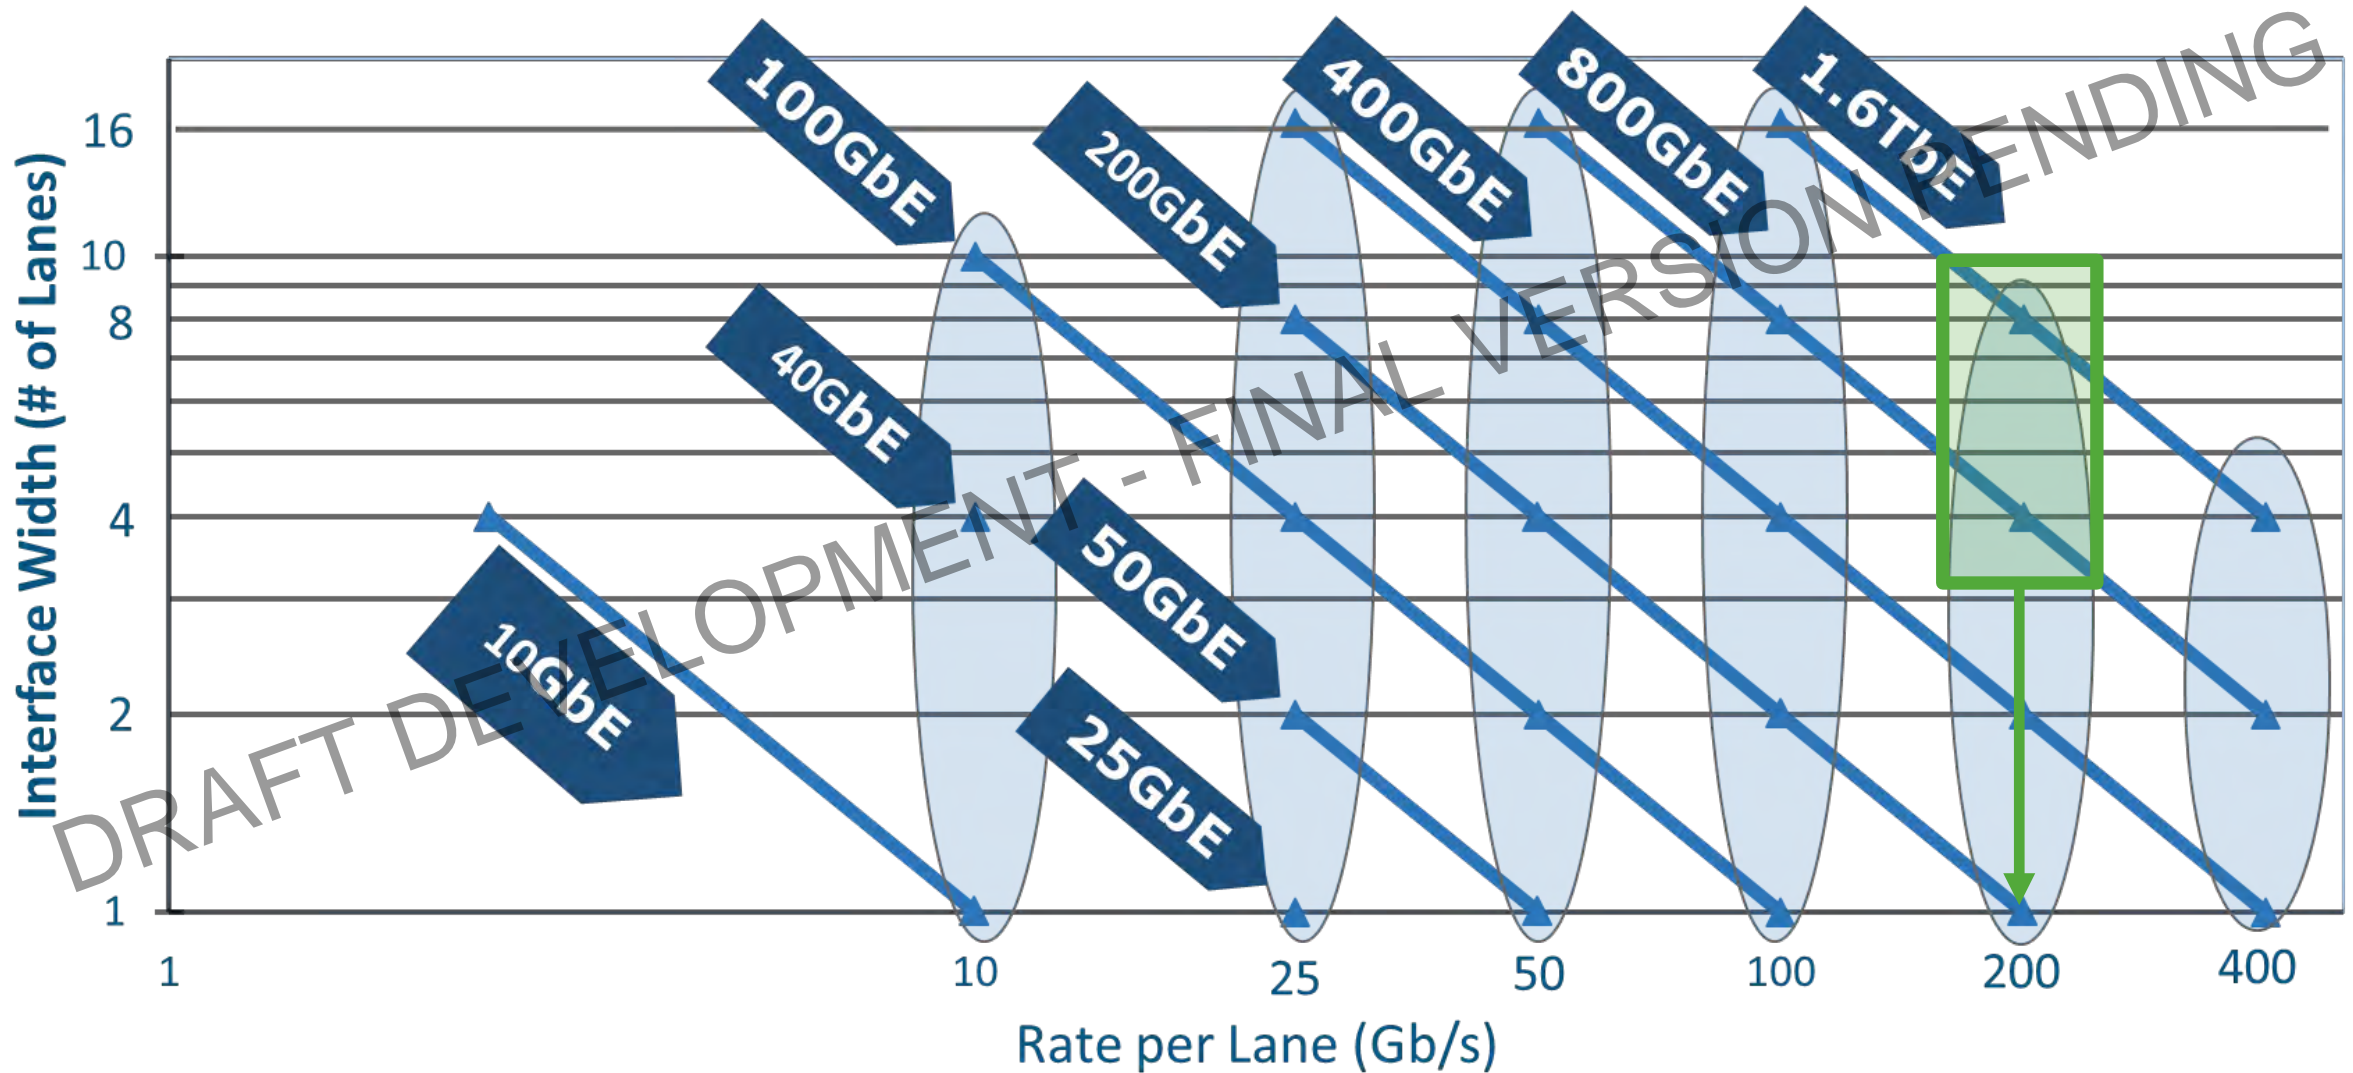

Beyond 100 Gb/s Research is Underway

- S. Yamaoka et al., "239.3-Gbit/s net rate PAM-4 transmission using directly modulated membrane lasers on high-thermal-conductivity SiC" in Proceedings of European Conference on Optical Communication (ECOC), 2019/9.
- X. Pang et al., 200 Gbps/lane IM/DD Technologies for Short Reach Optical Interconnects, <https://core.ac.uk/download/pdf/289286726.pdf>, 2019/04/24.
- W. Heni et al., Ultra-High-Speed 2:1 Digital Selector and Plasmonic Modulator IM/DD Transmitter Operating at 222 GBaud for Intra-Datacenter Applications, <https://www.osapublishing.org/jlt/abstract.cfm?URI=jlt-38-9-2734>, 2020/9.
- S Lange et al., 100 GBd Intensity Modulation and Direct Detection with an InP-based Monolithic DFB Laser Mach-Zehnder Modulator, Journal of Lightwave Technology, https://www.researchgate.net/publication/319259046_100_GBd_Intensity_Modulation_and_Direct_Detection_with_an_InP-based_Monolithic_DFB_Laser_Mach-Zehnder_Modulator, 2017/8.
- E. Sentieri et al., "12.2 A 4-Channel 200Gb/s PAM-4 BiCMOS Transceiver with Silicon Photonics Front-Ends for Gigabit Ethernet Applications," 2020 IEEE International Solid-State Circuits Conference - (ISSCC), San Francisco, CA, USA, 2020, pp. 210-212, doi: 10.1109/ISSCC19947.2020.9062992.
- T. Wettlin et al., "Beyond 200 Gb/s PAM4 transmission using Tomlinson-Harashima precoding," 45th European Conference on Optical Communication (ECOC 2019), Dublin, Ireland, 2019, pp. 1-4, doi: 10.1049/cp.2019.0834.
- Net 212.5 Gbit/s Transmission in O-band With a SiP MZM, One Driver and Linear Equalization, Maxime Jacques¹, Zhenping Xing¹, Alireza Samani¹, Xueyang Li¹, Eslam El-Fiky¹, Samiul Alam¹, Olivier Carpentier¹, Ping-Chiek Koh², David Plant¹; ¹McGill Univ., Canada; ²Lumentum, USA. OFC-2020, Post deadline paper Th4A.3

200 Gb/s Signaling – The Next Generation?

- OIF approves CEI 224G Development Project

- <https://www.businesswire.com/news/home/20200826005437/en/OIF-Approves-CEI-224G-Development-Project-Reviews-Co-packaging>


DRAFT DEVELOPMENT - FINAL VERSION PENDING

800 Gb/s Single Wavelength Transmission

The Future of Coherent is emerging

- Successful trial of 800 Gb/s single-wave transmission over 950 km - <https://bit.ly/2Wdkh8e>
- Platform supporting 200 Gb/s to 800 Gb/s single-carrier - <https://bit.ly/2KLpW05>
- "Industry's first 800G tunable ultra-high-speed optical module" <https://bit.ly/2yTYNFK>
- "Verizon says it has successfully transmitted an 800-Gb/s wavelength on its live network" - <https://bit.ly/3d2GX1M>

Potentially applicable to Duplex SMF and DWDM systems!

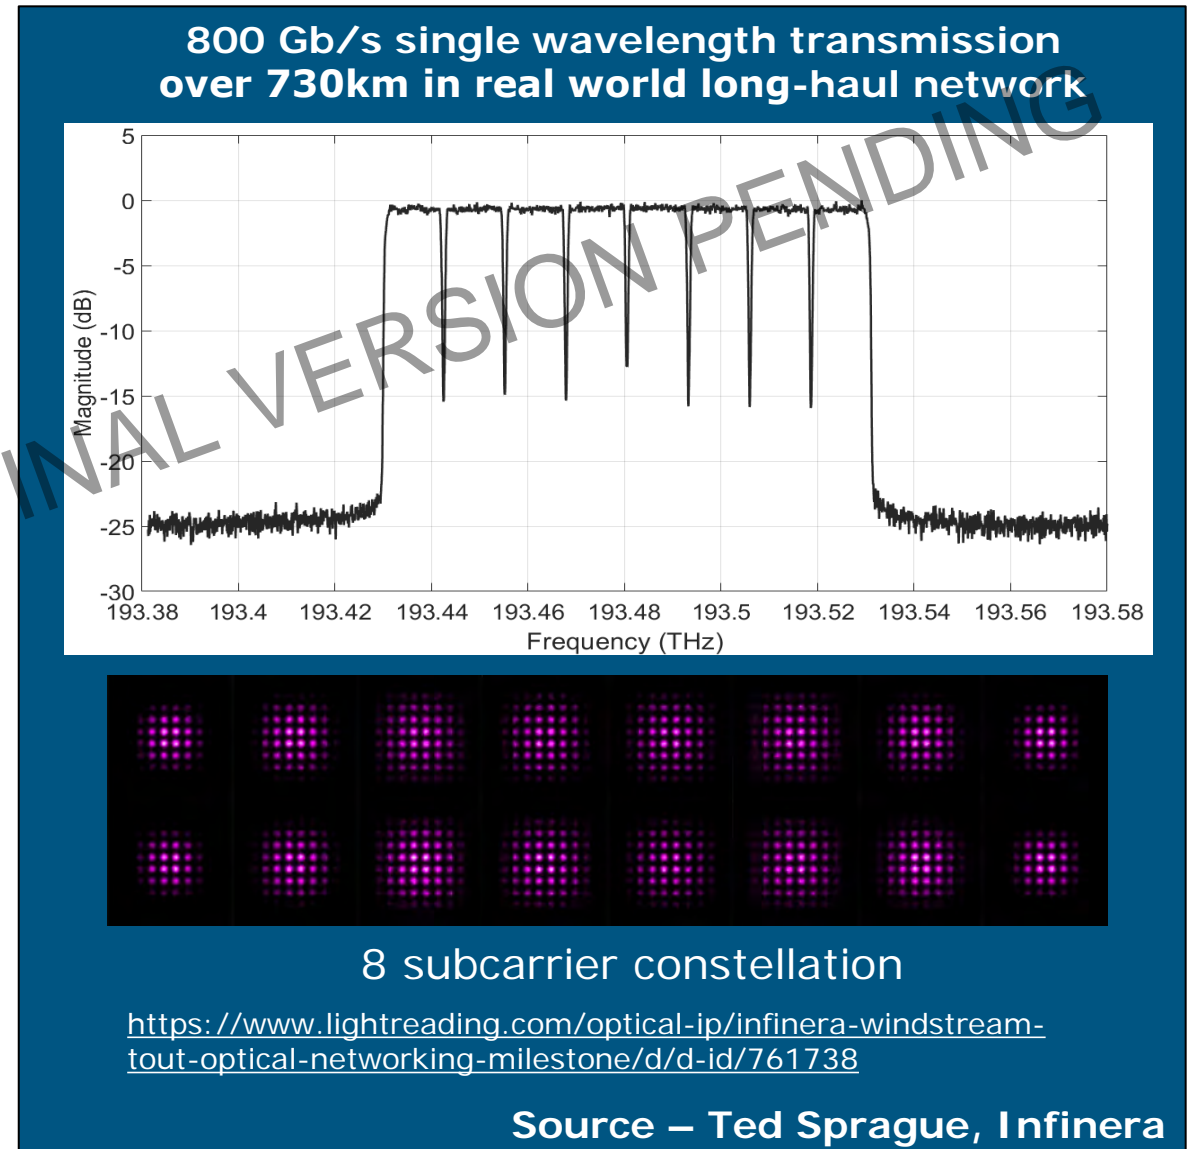

SUMMARY


- **Path to Beyond 400 GbE exists**
- **Leverage 100 Gb/s building blocks**
- **800 GbE building blocks and example available now**
- **Plausible implementations for today and next generation**
- **800 Gb/s over a single wavelength for duplex SMF and DWDM systems is emerging now**

BEYOND 400 GbE WHY NOW?




DRAFT DEVELOPMENT - FINAL VERSION PENDING

The 2020 Ethernet Bandwidth Assessment

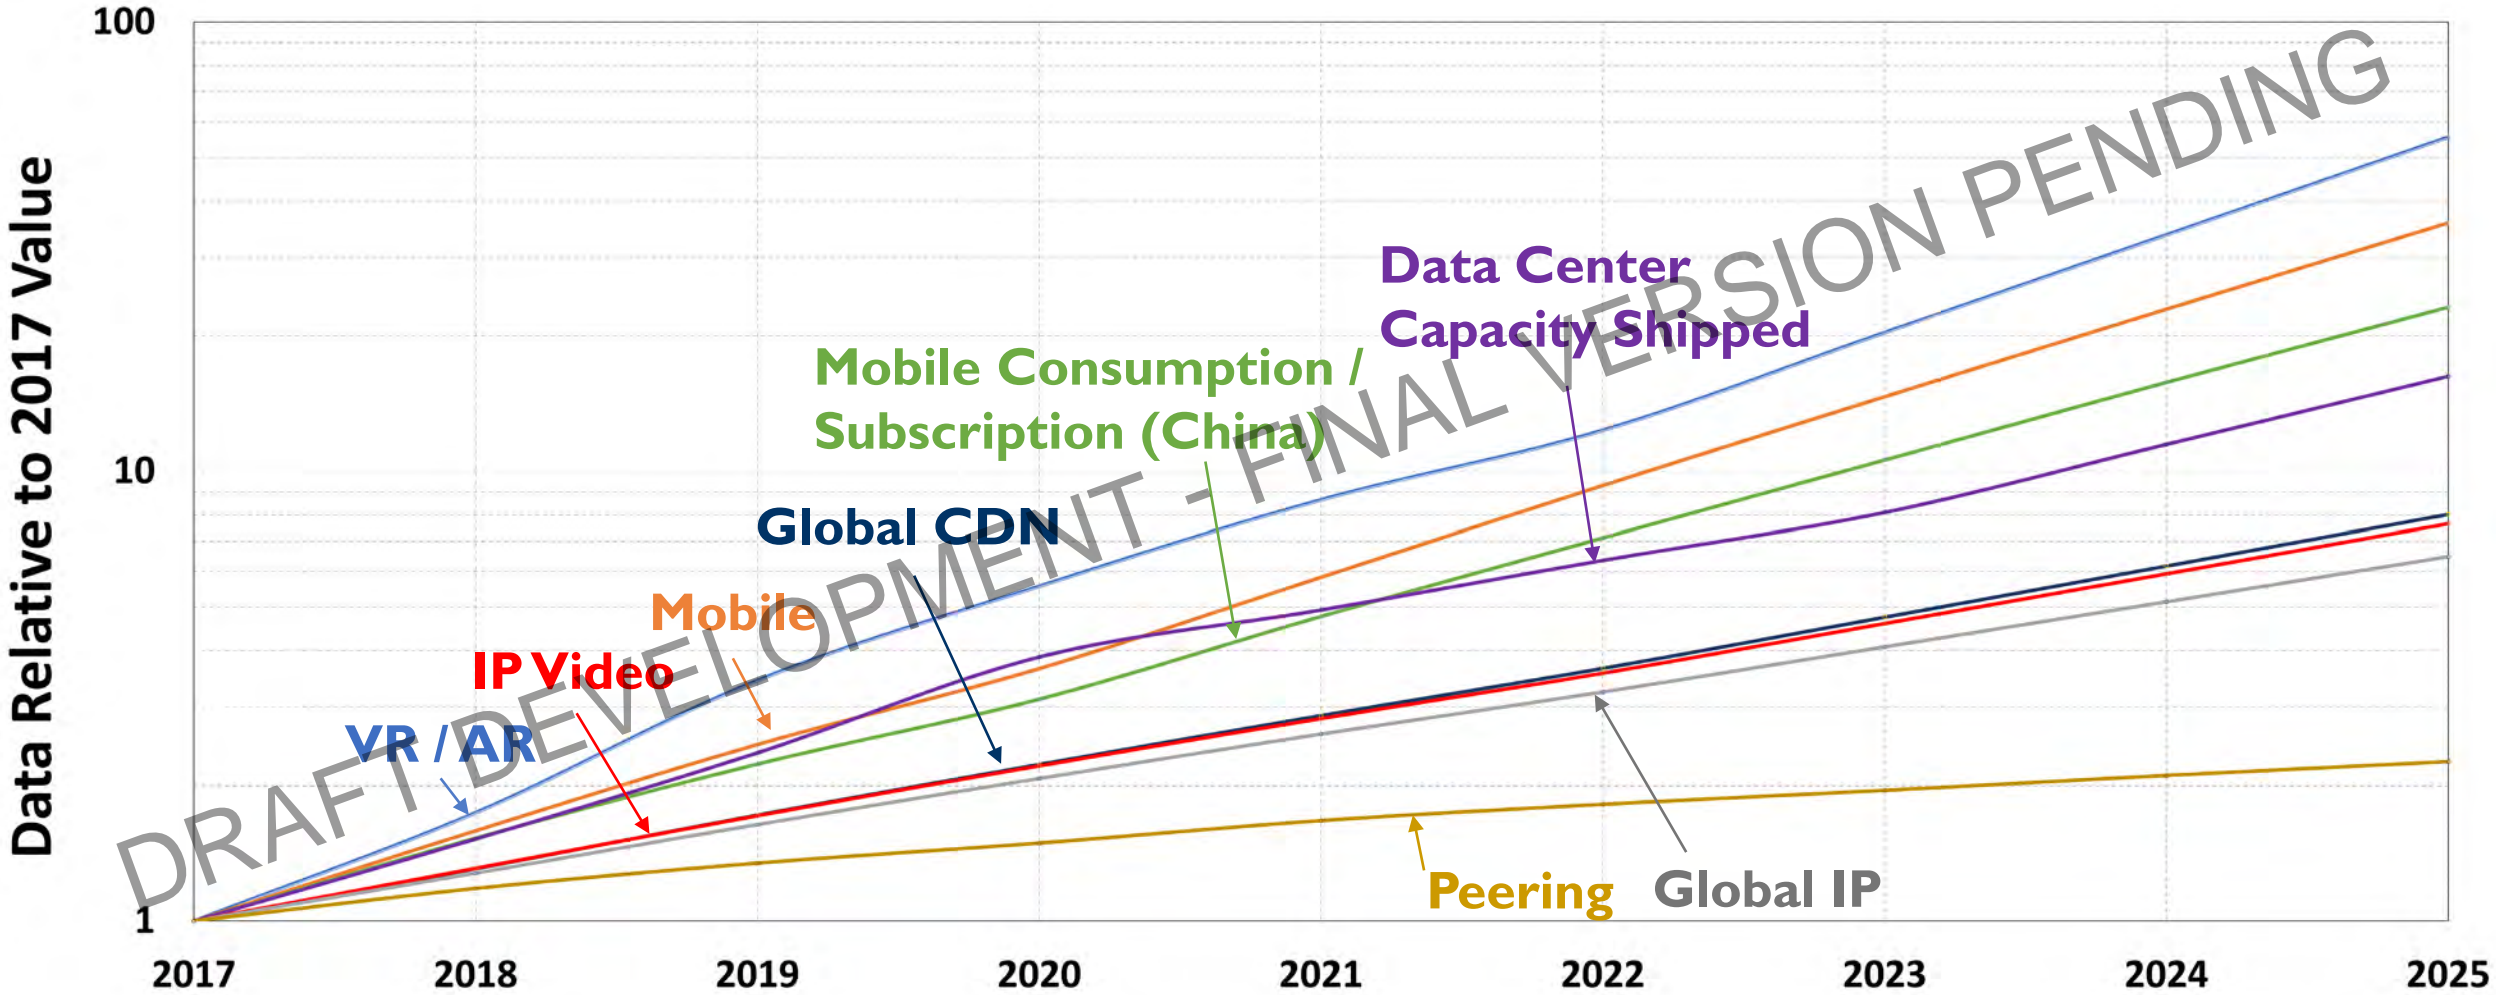

Source: <https://bit.ly/802d3bwa2>


TRENDLINE – SWITCH CAPACITY

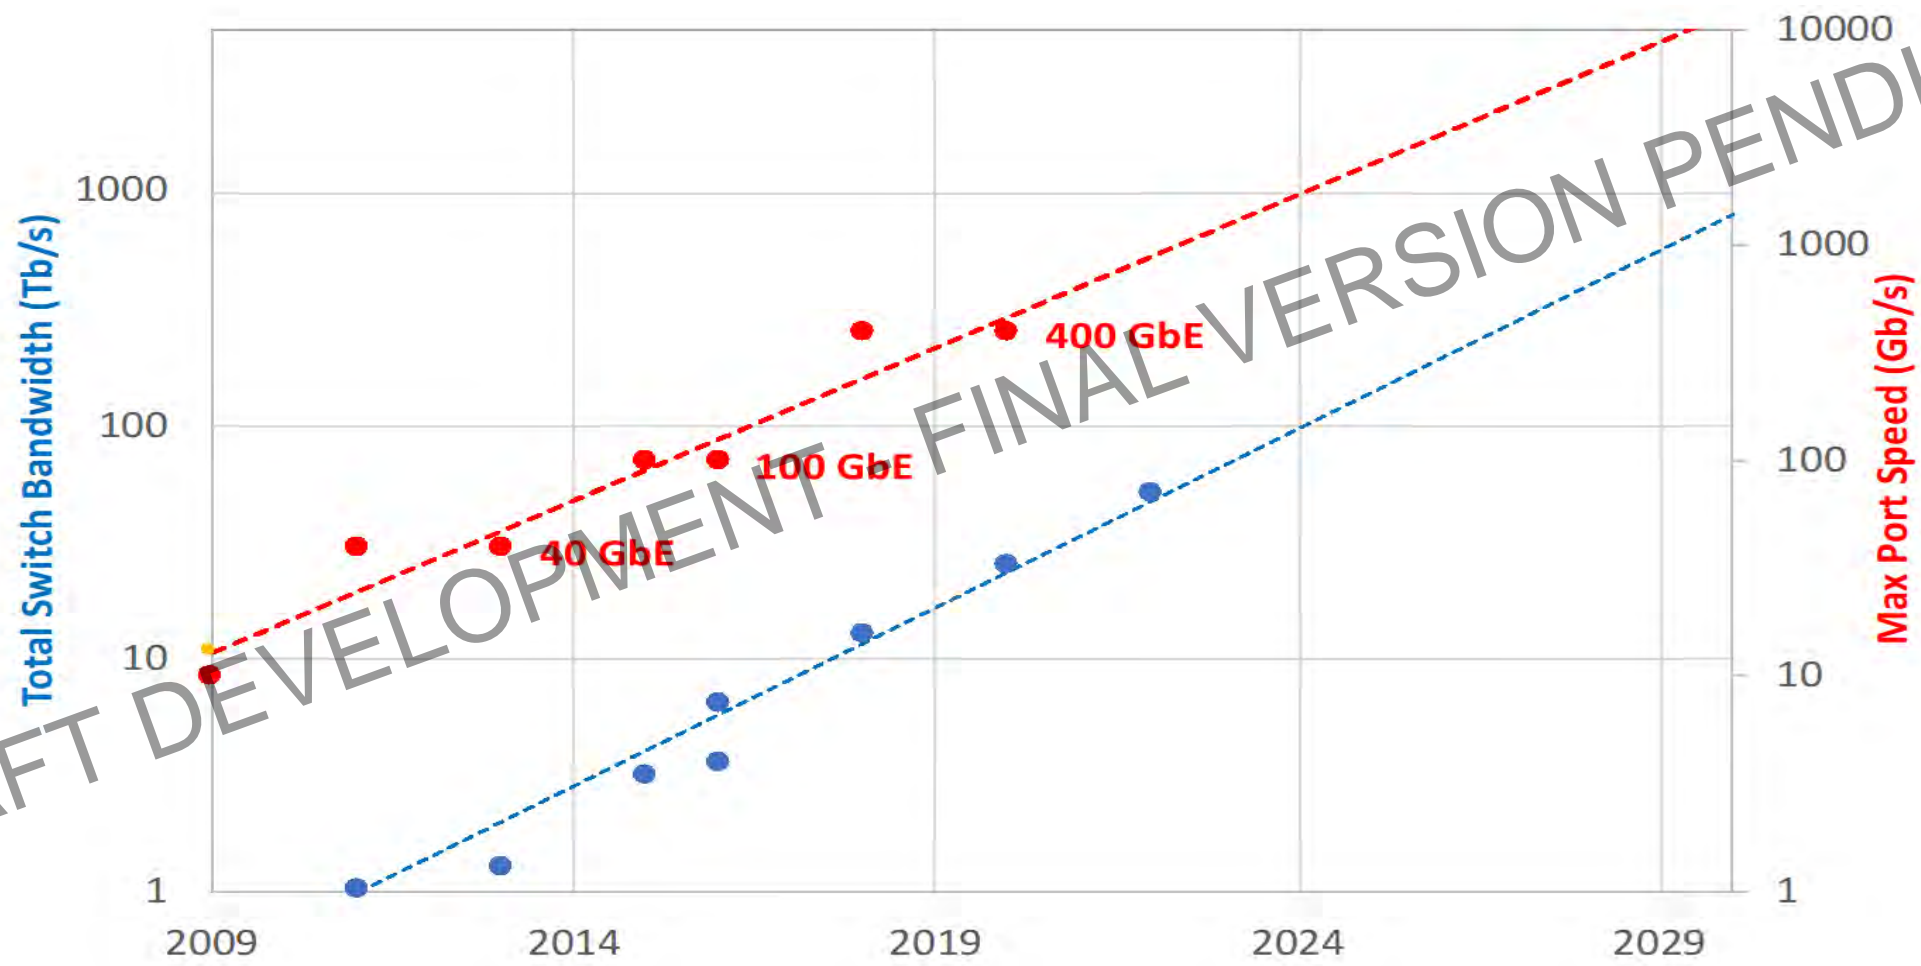

Source: Rob Stone, Facebook


TRENDLINE – SERDES DEVELOPMENT

Comparison of Lane Data Rate and Node Label Timelines

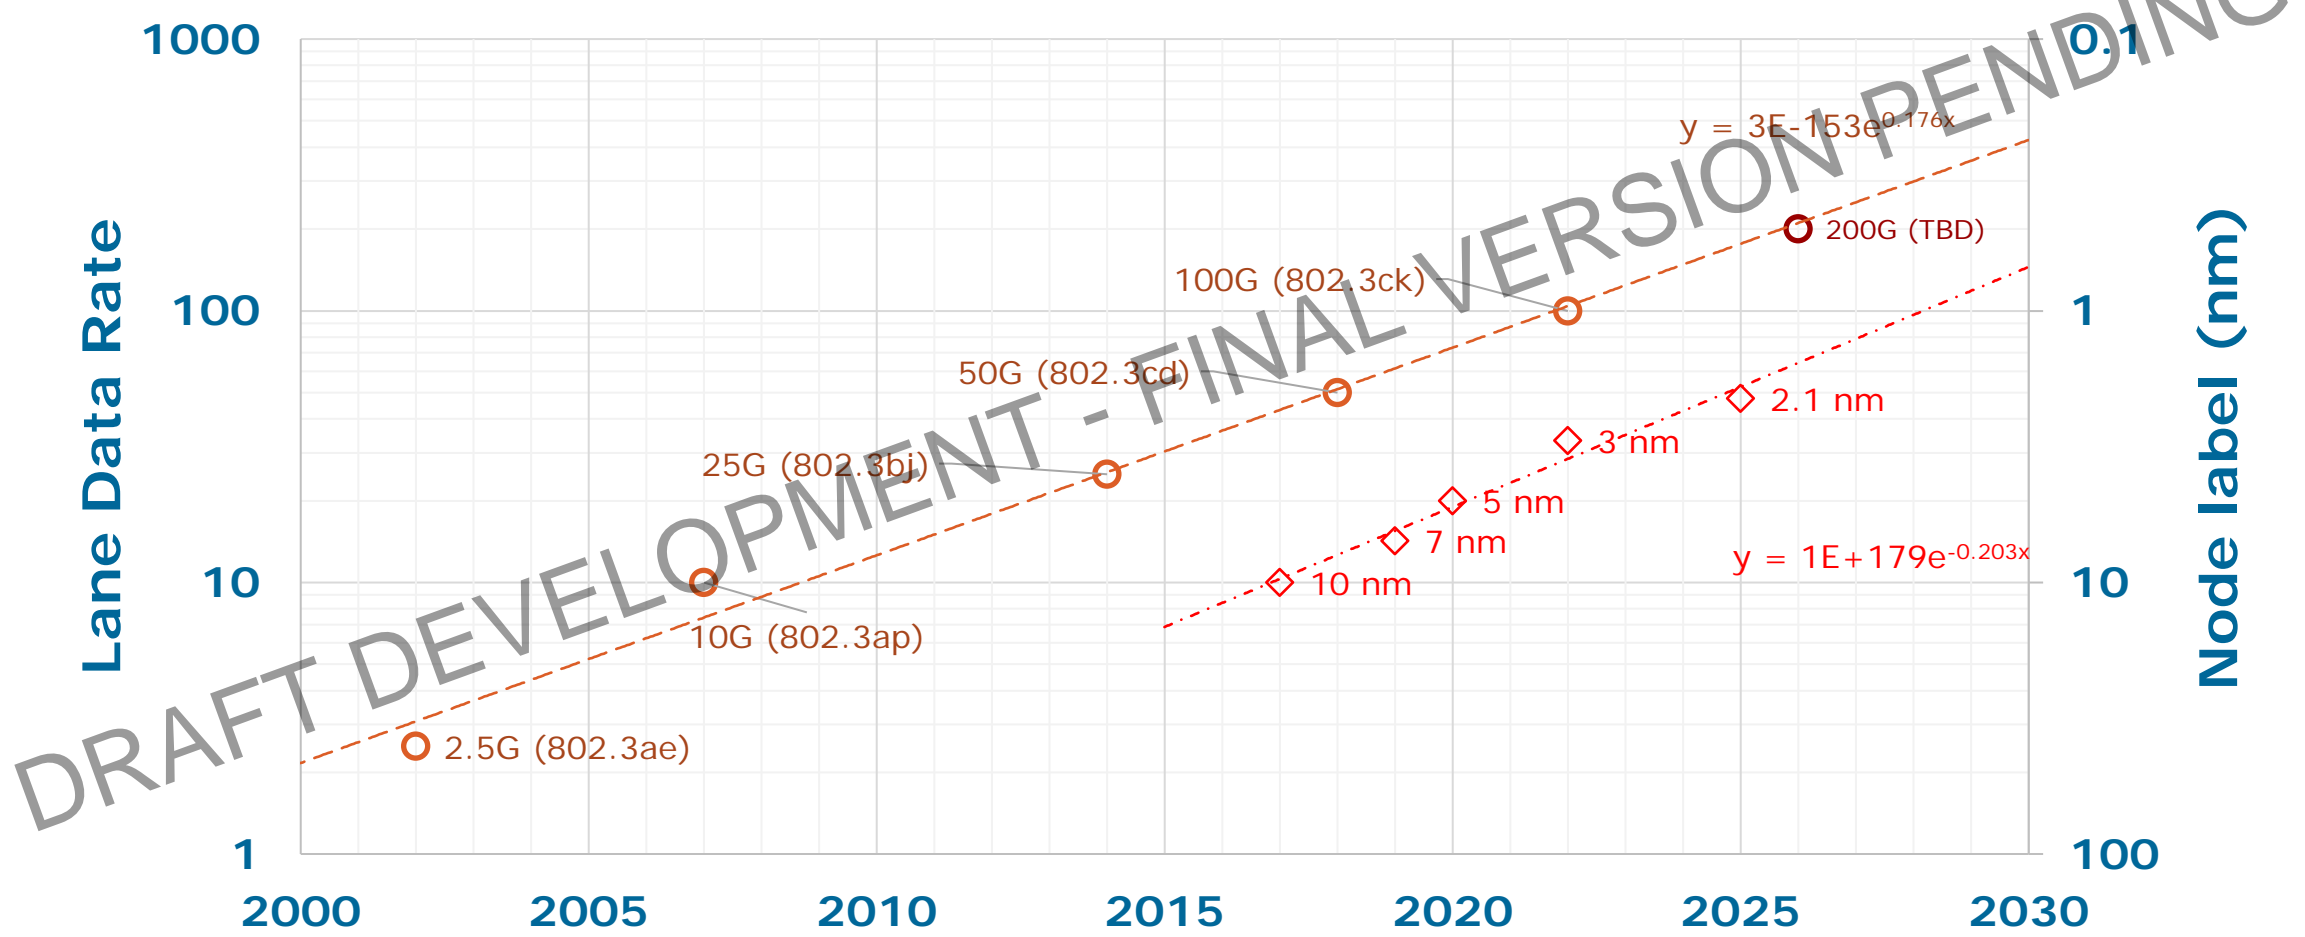


Source: Matt Brown, Huawei

Understanding the Typical Physical Challenges

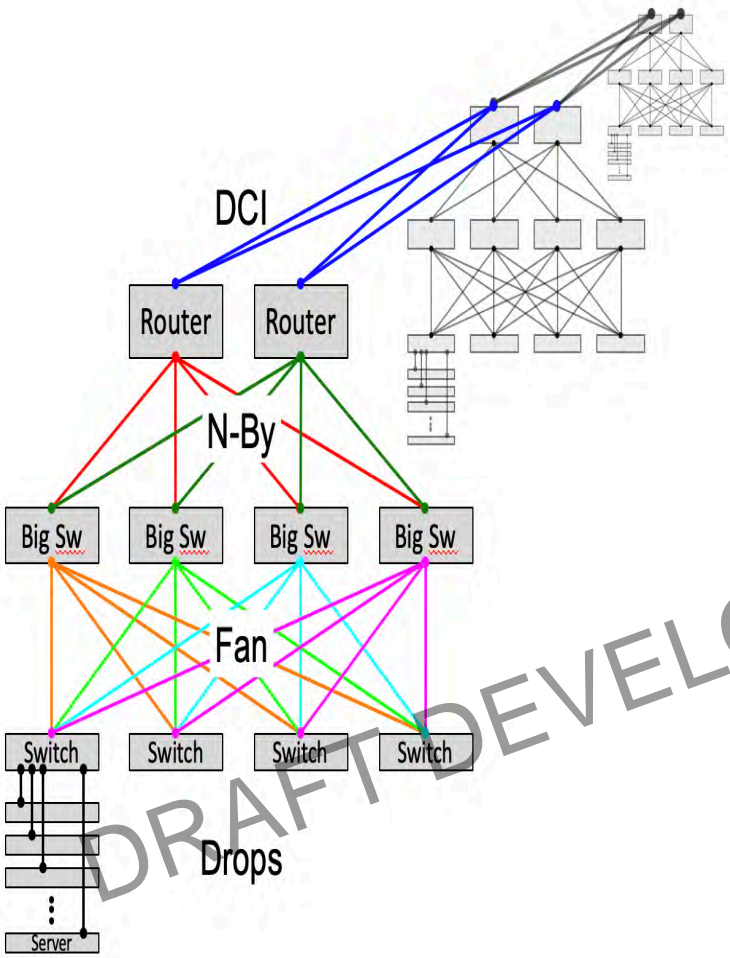


Beyond 400 GbE (Serial)	80 km	SMF	DWDM
Beyond 400 GbE (WDM / Parallel fibers)	2 km to 40 km		Duplex Fiber
	50 m to 500 m	SMF MMF	Fiber (duplex or parallel)
> 100 GbE	< 30m	MMF twin axial	MMF twin axial

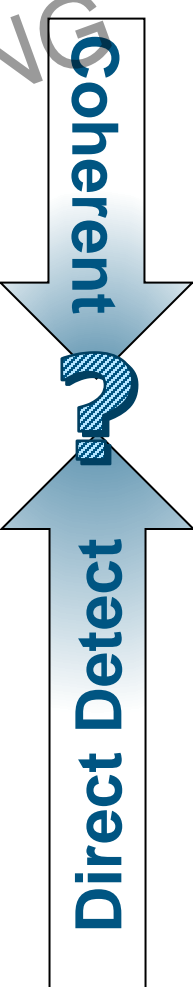

Beyond 400 GbE C2C / C2M AUI Development

Figure courtesy Jim Theodoras, HG Genuine

CONSIDERING THE NEXT ETHERNET RATE STANDARD

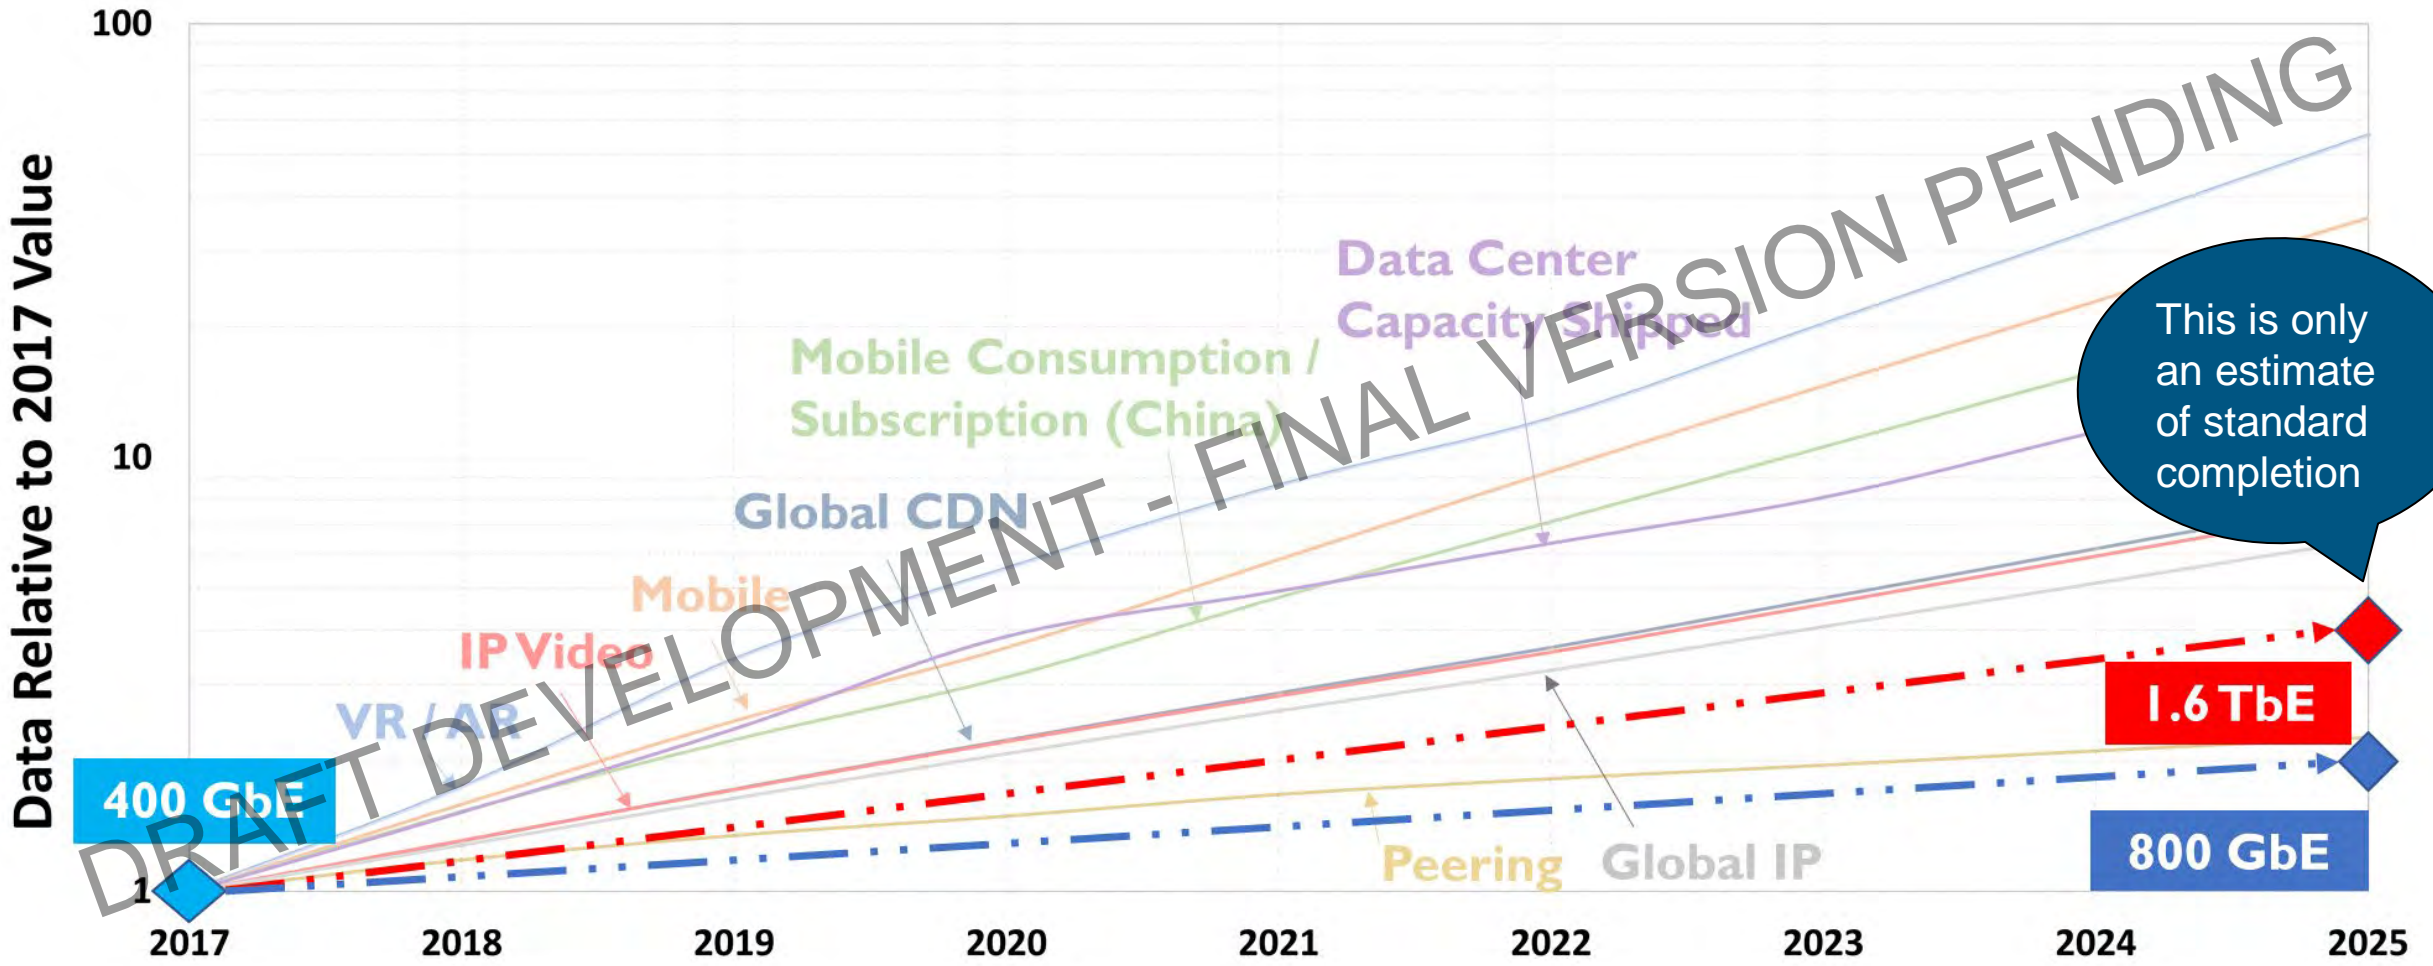

Source: <https://bit.ly/802d3bwa2>

SUMMARY

- **Bandwidth –**
 - Underlying factors all indicate continued growth
 - Exponential growth continues!
- **New bandwidth generating applications constantly being introduced**
 - Mobile (5G) / Video
 - Artificial Intelligence
 - Virtual / Augmented Reality
- **Today's world stressing the need for connectivity and bandwidth**
- **Last two "Higher Speed" efforts (from CFI to standard ratification)**
 - 40 / 100 GbE – 3 years, 11 months
 - 200 / 400 GbE – 4 years, 9 months
- **There is some time between standard ratification and product introduction**
 - The bandwidth problem will only continue to grow
- **We need to begin the process to study the problem!**
- **Big questions to consider**
 - Next speed or speeds?
 - What physical layer specifications?

Proposed Study Group Chartering Motion

Approve the formation of a Beyond 400 Gb/s Ethernet Study Group to consider development of a Project Authorization Request (PAR) and Criteria for Standards Development (CSD) responses for:

1. Beyond 400 Gb/s Ethernet;
2. Physical Layers specifications for existing Ethernet rates based on any signaling rate used for (1).

DRAFT DEVELOPMENT - FINAL VERSION PENDING

Supporters (Page 1 of 3)

(as of 9/20/20)

John Venu	Abbott	Corning Incorporated	Mark Rubio	Gustlin	Cisco
Thananya	Balasubramonian	Marvell	Xiang	Han	China Mobile
Vipul	Baldwin	Keysight Technologies	Howard	He	Huawei
Paul	Bhatt	II-VI Incorporated	Briah	Heck	Intel
Matt	Brooks	VIAVI Solutions	Hideki	Holden	Kandou
Leon	Brown	Huawei Technologies Canada	Tom	Isono	Fujitsu Optical Components
Derek	Bruckman	Huawei	Ken	Issenhuth	Huawei
Frank	Cassidy	IET / ICRG	John	Jackson	Sumitomo Electric Device Innovations USA
Ayla	Chang	Source Photonics	Lokesh	Johnson	Broadcom
Weiqliang	Chang	Huawei	Mark	Kabra	Synopsys
Mabud	Cheng	China Mobile	Cedric	Kimber	Semtech
John	Choudhury	OFS	Dominic	Lam	Google
John	D'Ambrosia	Futurewei, U.S. Subsidiary of Huawei	David	Lapierre	EXFO
Claudio	DeAndrea	II-VI Inc	John	Lewis	Lumentum
Mike	DeSanti	Dell Technologies	Junjie	Lewis	Dell Technologies
Vince	Dudek	Marvell	Mike	Li	China Telecom
Ali	Ferretti	Corning Incorporated	Robert	Li	Intel
Joel	Ghiasi	Ghaisi Quantum LLC	Hai-Feng	Lingle	OFS
Bob	Goergen	Cisco	Kent	Liu	HG Genuine
	Grow	RMG Consulting		Lusted	Intel

Supporters (Page 2 of 3)

(as of 9/20/20)

Ilya	Lyubomirsky	Inphi	Rick	Rabinovich	Keysight Technologies
Valerie	Maguire	Siemon	Sridhar	Ramesh	Maxlinear
David	Malicoat	Malicoat Networking Solutions	Olindo	Savi	Hubbell
Eric	Maniloff	Ciena	Ed	Sayre	North East Systems Associates, Inc.
Flavio	Marques	Furukawa Electric	Steve	Sekel	Keysight Technologies
Brett	McClellan	Marvell	Steve	Shellhammer	QualComm
Larry	McMillan	Western Digital	Priyank	Shukla	Synopsys
Rich	Mellitz	Samtec	Scott	Sommers	Molex
Guangcan	Mi	Huawei	Yoshiaki	Sone	NTT
Shimon	Muller		Massimo	Sorbara	GlobalFoundries
Dale	Murray	LightCounting	Ted	Sprague	Infinera
Ray	Nering	Cisco	Rob	Stone	Facebook
Shawn	Nicholl	Xilinx	Steve	Swanson	Corning Incorporated
Paul	Nikolich	Independent	Bharat	Tailor	Semtech
Kumi	Omori	NEC	Tomoo	Takahara	Fujitsu
Tom	Palkert	Samtec	Jim	Theodoras	HG Geuine USA
Earl	Parsons	CommScope	Nathan	Tracy	TE Connectivity
Jerry	Pepper	Keysight Technologies	Viet	Tran	Keysight Technologies
David	Piehler	Dell Technologies	Tedros	Tsegaye	Innolight
Rick	Pimpinella	Panduit	Jeff	Twombly	Credo Semiconductor

Supporters (Page 3 of 3)

(as of 9/20/20)

Ed	Ulrichs	Intel
Paul	Vanderlaan	UL LLC
Xinyuan	Wang	Huawei
Winston	Way	Neophotonics
Yangling	Wen	Futurewei
Zhao	Wenyu	CAICT
James	Withey	Fluke
Chongjin	Xie	Alibaba
Shuto	Yamamoto	NTT
Zhiwei	Yang	ZTE
James	Young	Commscope
Xu	Yu	Huawei
Hua	Zhang	Hisense Broadband
Xiang	Zhou	Google
Yan	Zhuang	Huawei
George	Zimmerman	CME Consulting
Pavel	Zivny	Tektronix
Vasu	Parthasarathy	Broadcom
Tom	Williams	Acacia
Greg	Le Cheminant	Keysight Technologies

DRAFT DEVELOPMENT - FINAL VERSION PENDING

STRAW POLLS

DRAFT DEVELOPMENT - FINAL VERSION PENDING



Call-for-interest

➤ **Should a Study Group be formed for “Beyond 400 Gb/s Ethernet”**

➤ **YES**

➤ **No**

➤ **Abstain**

➤ **Call Count**

DRAFT DEVELOPMENT - FINAL VERSION PENDING

participation

- I would participate in the “Beyond 400 Gb/s Ethernet” Study Group in IEEE 802.3
 - Tally:
- I believe my affiliation would support participation in the “Beyond 400 Gb/s Ethernet” Study Group in IEEE 802.3
 - Tally:

Future work

- **Ask 802.3 WG for approval**
- **If approved, request formation of “Beyond 400 Gb/s Ethernet” Study Group by 802 EC**
- **If approved,**
 - **Creation of Study Group page /reflector**
 - **First Study Group meeting [teleconference?] anticipated for Jan 21 Interim**

DRAFT DEVELOPMENT - FINAL VERSION PENDING


THANK YOU!



APPENDIX: BACKUP SLIDES




LINK AGGREGATION WILL NOT SUFFICE

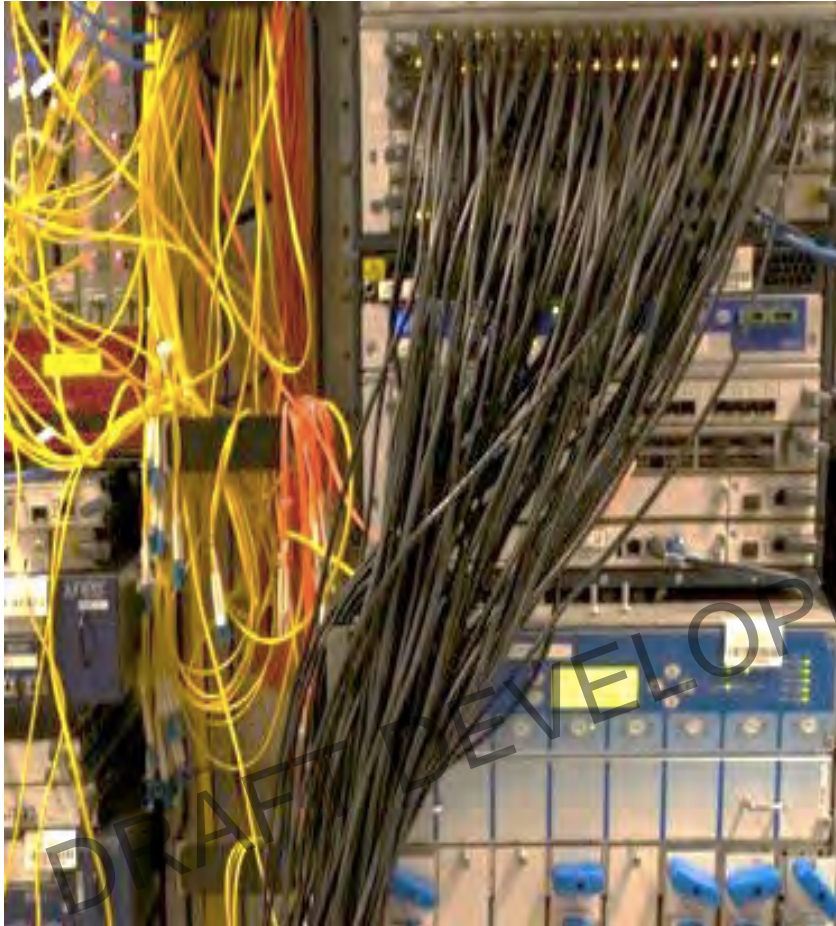

Courtesy, David Ofelt, Juniper.

- Problem: Need to scale the Network (density & cost)
- Temporary Solution: Link Aggregation
- Pros:
 - Addresses bandwidth requirements between releases of faster links
- Cons:
 - Non-deterministic performance
 - Fastest flow limited to individual link speed
 - Exponential bandwidth growth implies:
 - Exponential growth in number of links
 - Growth in operational & management issues
 - Doesn't scale forever.
- **Faster links address these issues and they will be LAGGed!**

HIGH PERFORMANCE COMPUTING

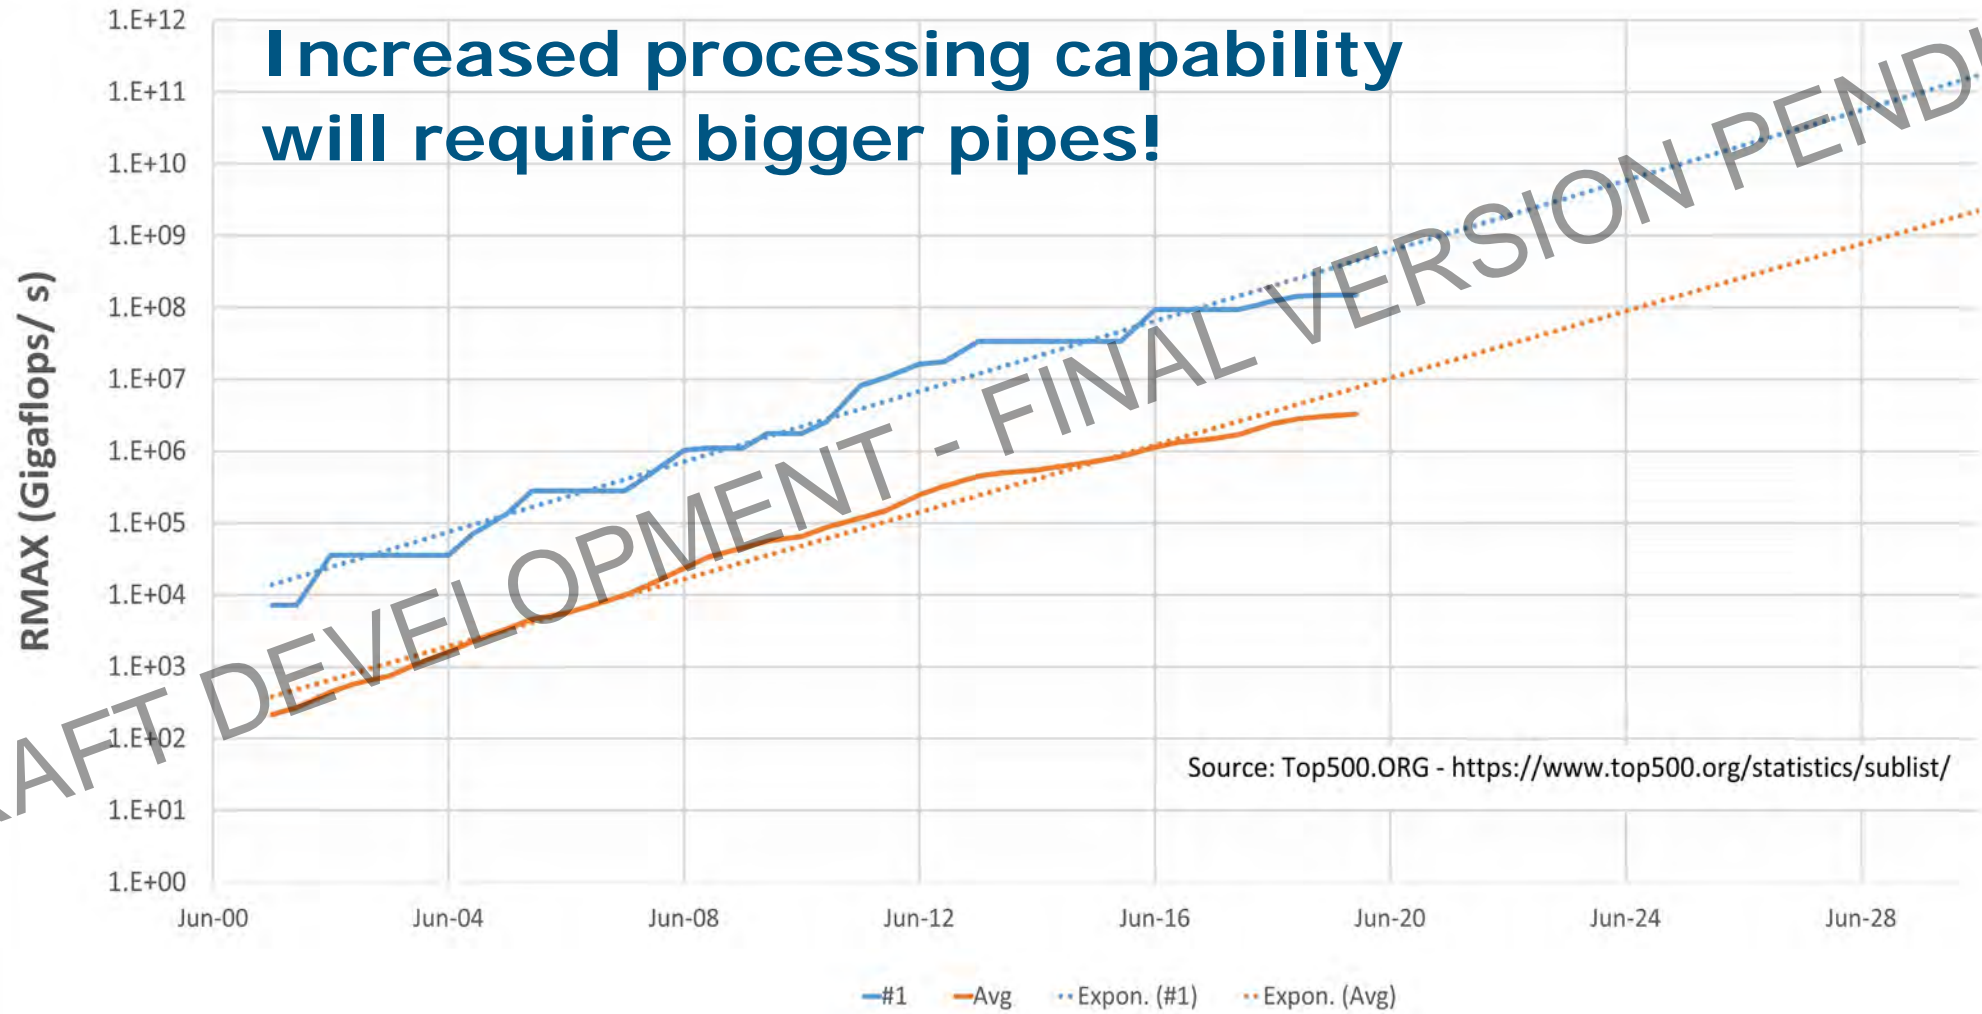

WORLD INTERNET USAGE


Total World	As of 3/31/19 ¹	As of 12/31/19 ³	Increase	As of 7/20/20 ²	Increase
Population	7,716,223,209	7,796,615,710	80,392,501	7,796,949,710	80,726,501
Internet Users	4,383,810,342	4,574,150,134	190,339,792	4,833,521,806	449,711,464
Internet Penetration	57%	59%	2%	62%	5%

Top 20 Countries	As of 3/31/19 ¹	As of 12/31/19 ³	Increase
Population	5,187,499,066	5,233,377,837	45,878,771
Internet Users	3,117,533,898	3,241,273,512	123,739,614
Internet Penetration	60%	62%	2%

Rest of World	As of 3/31/19 ¹	As of 12/31/19 ³	Increase
Population	2,565,984,143	2,563,237,873	-2,746,270
Internet Users	1,229,027,955	1,332,876,622	103,848,667
Internet Penetration	48%	52%	4%


Observations

- ❖ Only 8 countries had at least 80% connectivity
- ❖ ≈ 450 million users increase
- ❖ 5% increase in Total World Internet Penetration since Mar 31 2019

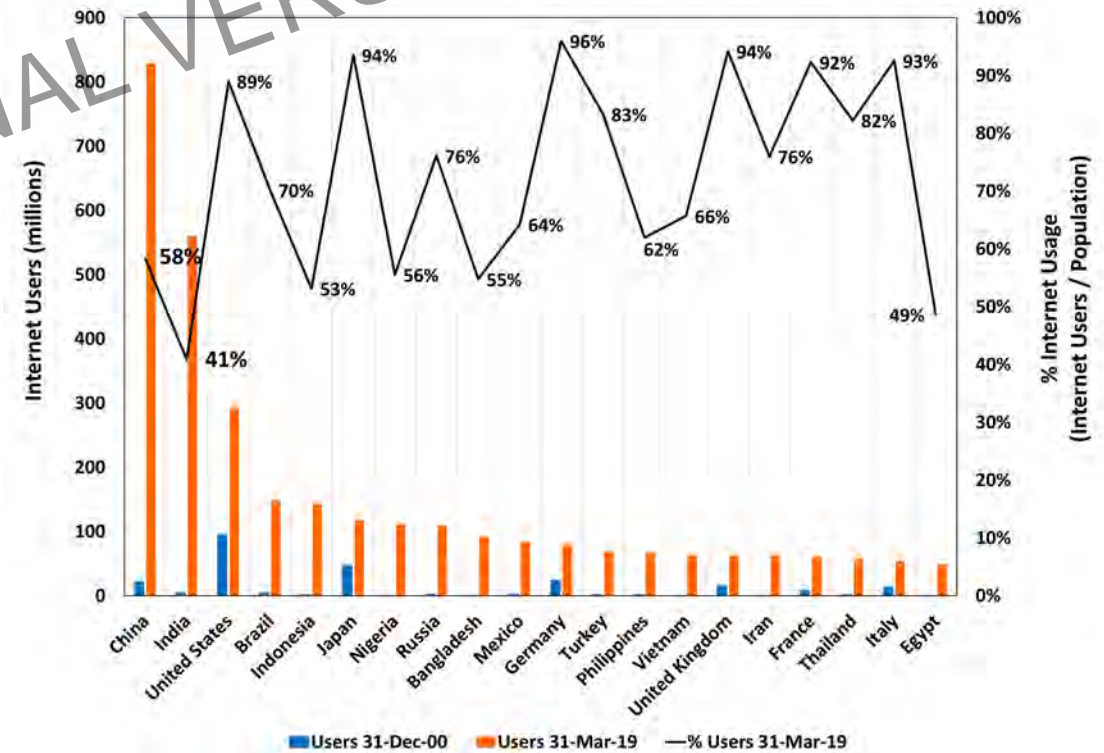

1. IEEE 802.3 BWA, PART II
 2. [HTTPS://WWW.INTERNETWORLDSTATS.COM/STATS.HTM](https://www.internetworldstats.com/stats.htm)
 3. [HTTPS://WWW.INTERNETWORLDSTATS.COM/TOP20.HTM](https://www.internetworldstats.com/top20.htm)

GLOBAL DEVICES / CONNECTIONS AVERAGE PER CAPITA

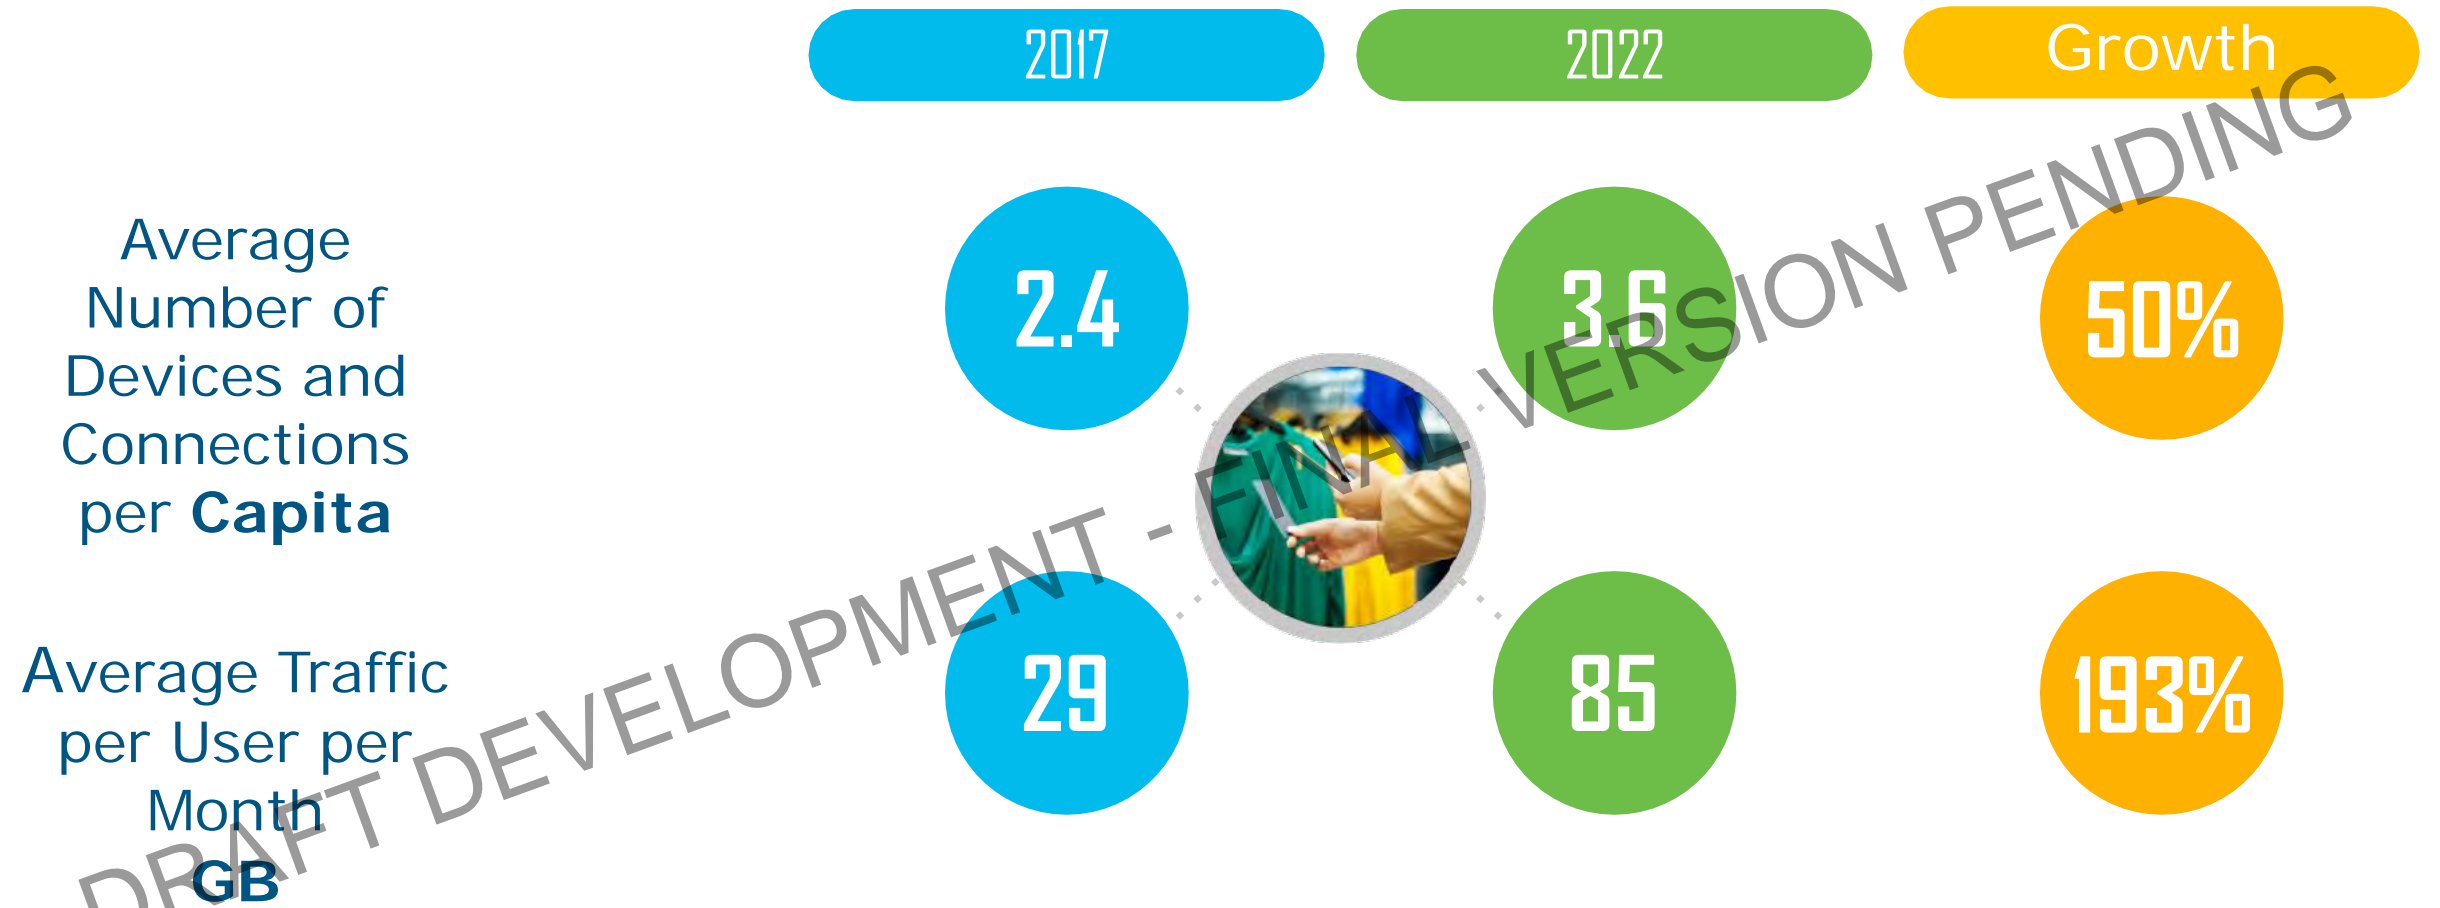

Number of connected devices per capita is growing
The average traffic per user is growing at a much faster rate

Source: Cisco VNI Forecast Update, http://www.ieee802.org/3/ad_hoc/bwa2/public/calls/19_0624/nowell_bwa_01_190624.pdf

GLOBAL DEVICE CONNECTION GROWTH (AVERAGE)

North America			
(Mb/s)	2017	2022	CAGR
Fixed Broadband	43.2	94.2	16.9%
Wi-Fi	37.1	83.8	17.7%
Cellular	16.3	42.0	20.8%

Western Europe			
(Mb/s)	2017	2022	CAGR
Fixed Broadband	37.9	76.0	14.9%
Wi-Fi	25.0	49.5	14.6%
Cellular	16.0	50.5	25.8%

Central & Eastern Europe			
(Mb/s)	2017	2022	CAGR
Fixed Broadband	32.8	46.7	7.3%
Wi-Fi	19.5	32.8	11.0%
Cellular	10.1	26.2	21.0%


Latin America			
(Mb/s)	2017	2022	CAGR
Fixed Broadband	11.7	28.1	19.2%
Wi-Fi	9.0	16.8	13.3%
Cellular	4.9	17.7	29.3%

Middle East & Africa			
(Mb/s)	2017	2022	CAGR
Fixed Broadband	7.8	20.2	21.0%
Wi-Fi	6.2	11.2	12.6%
Cellular	4.4	15.3	28.3%

Asia Pacific			
(Mb/s)	2017	2022	CAGR
Fixed Broadband	46.2	98.8	16.4%
Wi-Fi	26.7	63.3	18.8%
Cellular	10.6	28.8	22.1%

Source: Cisco VNI Forecast Update, http://www.ieee802.org/3/ad_hoc/bwa2/public/calls/19_0624/nowell_bwa_01_190624.pdf

GLOBAL INTERNET TRAFFIC BUSY-HOUR VS AVERAGE HOUR

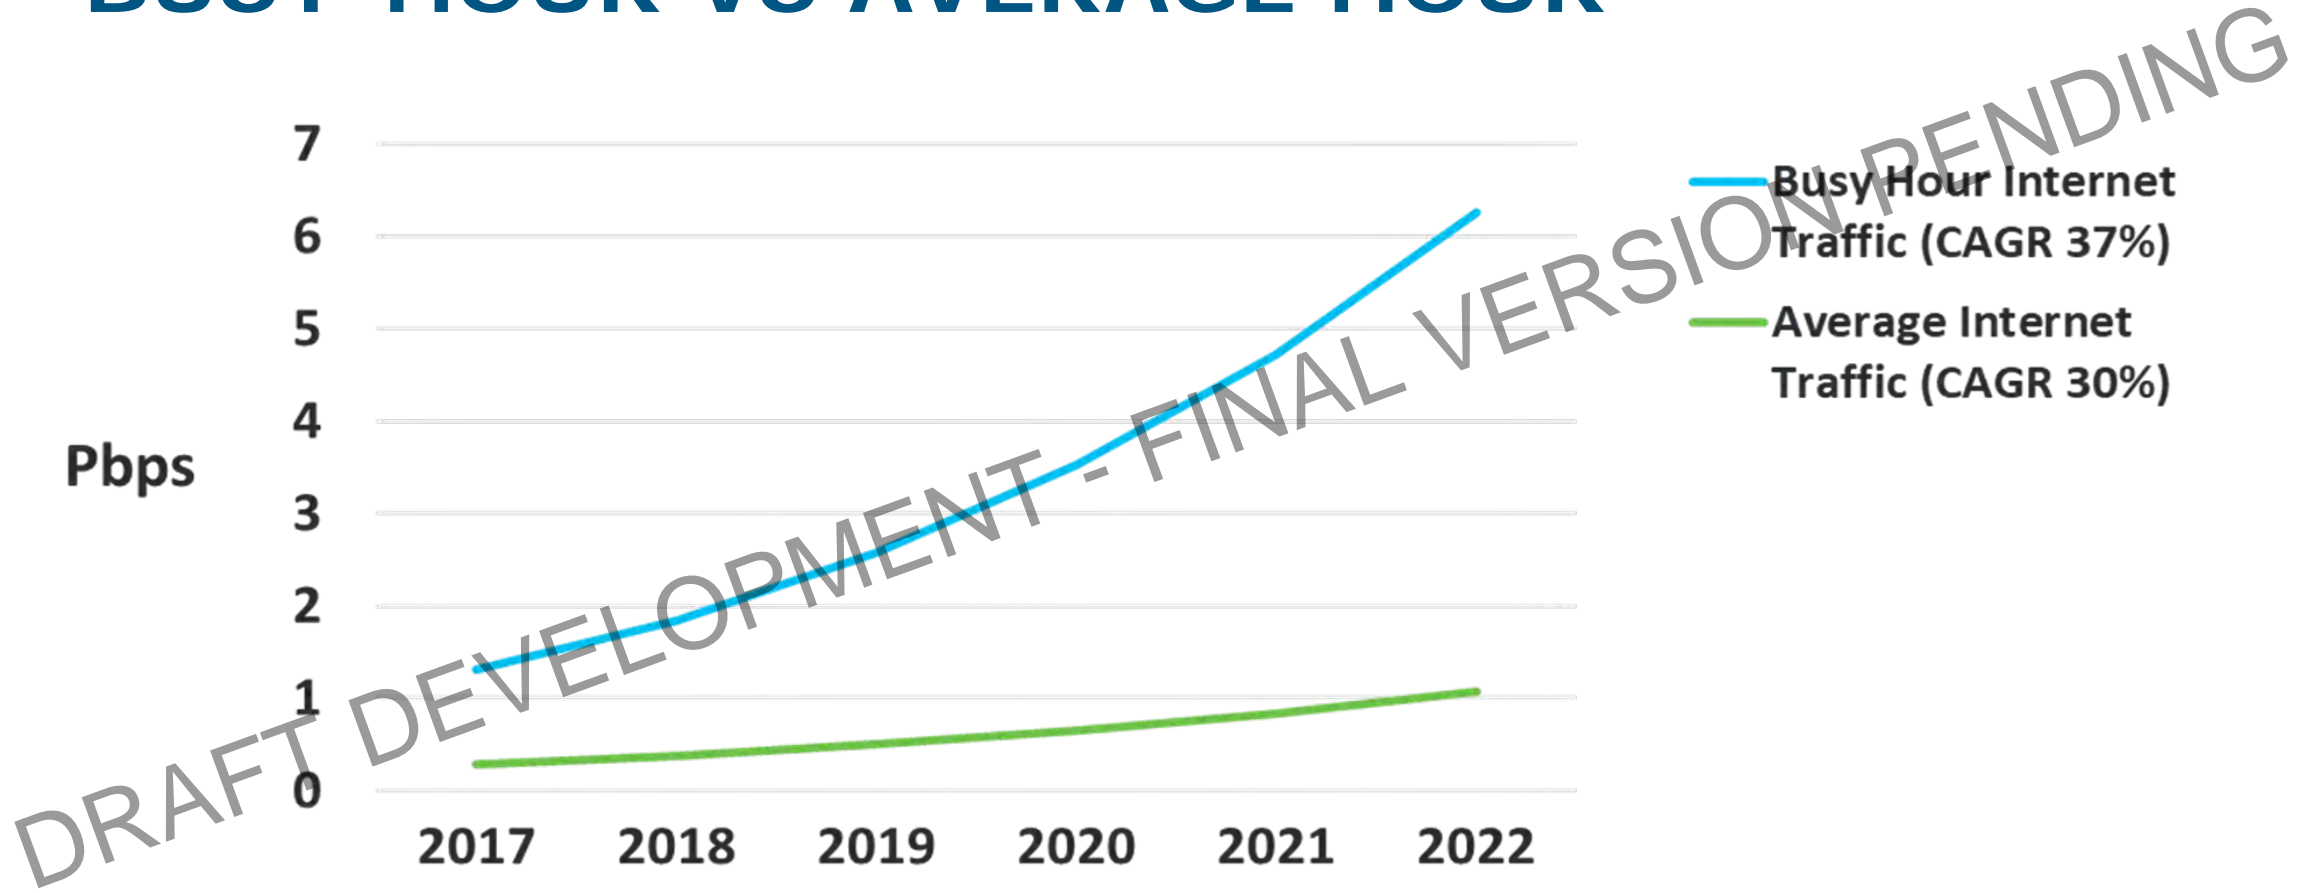


Source: Cisco VNI Forecast Update, http://www.ieee802.org/3/ad_hoc/bwa2/public/calls/19_0624/nowell_bwa_01_190624.pdf

IMPACT OF "DEFINITION" ON IP VIDEO GROWTH

29% CAGR
2017–2022

Exabytes
per
Month

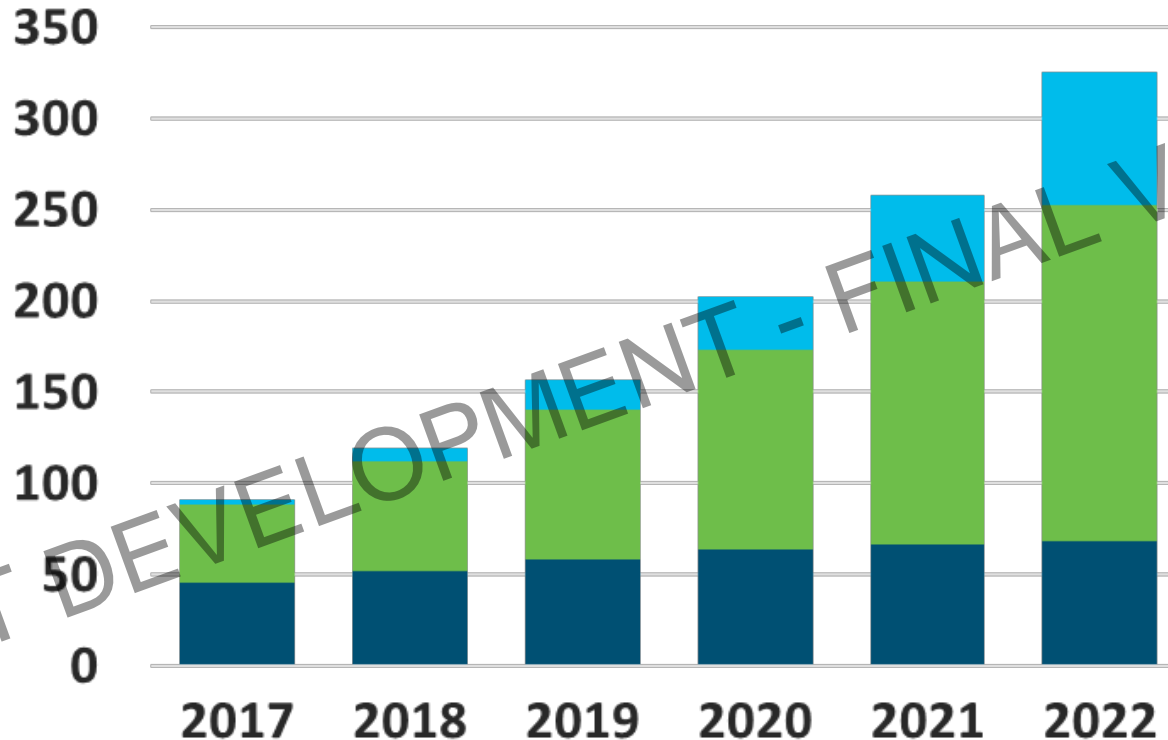

- Ultra-High Def (UHD) Video (3%, 22%)
- High Def (HD) Video (46%, 57%)
- Standard Def (SD) Video (50%, 21%)


* Device (x,y) refers to 2017, 2022 traffic share

Growth in the adoption of HD and UHD dominate IP video traffic


Source: Cisco VNI Forecast Update, http://www.ieee802.org/3/ad_hoc/bwa2/public/calls/19_0624/nowell_bwa_01_190624.pdf

DATA CENTER CAPACITY CONTINUES TO GROW

Enterprise / Cloud Server Unit Shipments*

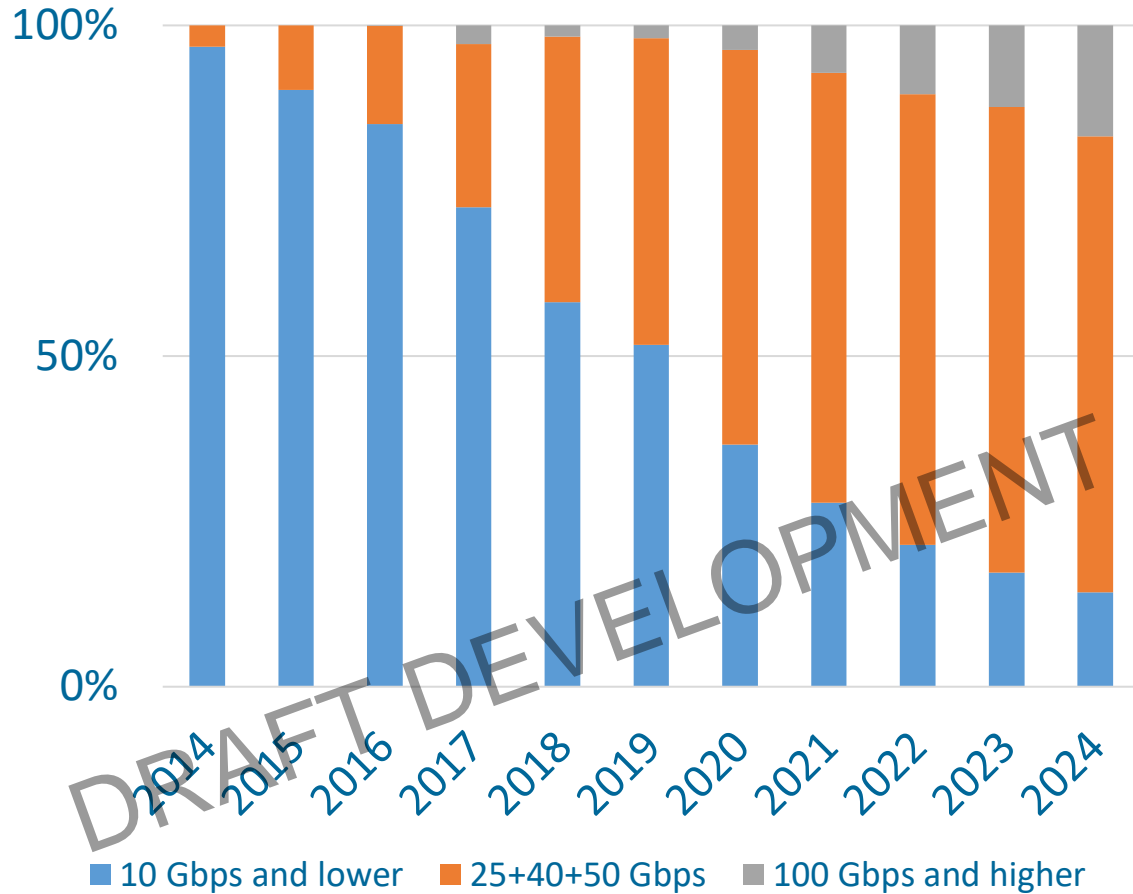


Switch Capacity Shipments in Eb/s**

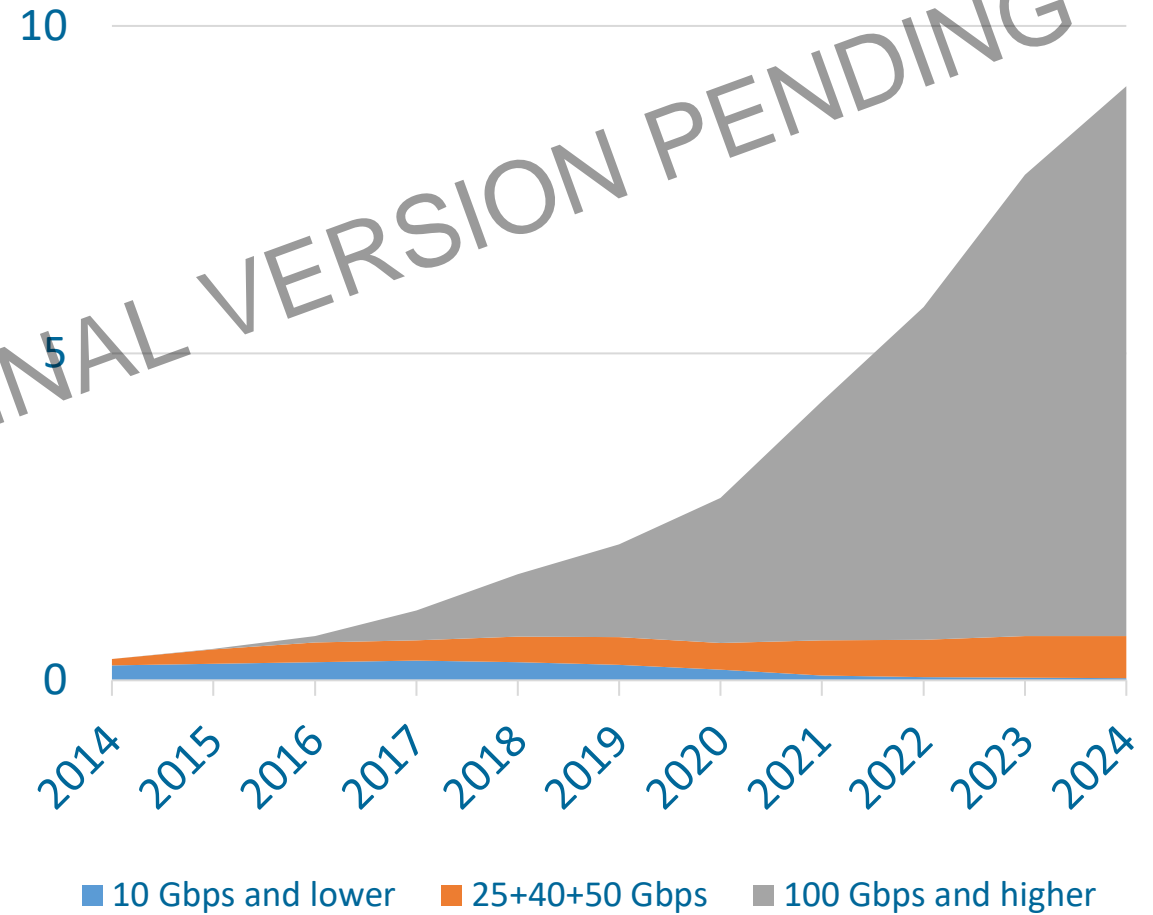

* Percent of annual server shipments categorized by speed of the attached controllers and adapters
 ** Annual port capacity shipped on Data Center Ethernet Switches measured in exabits per second



ESTIMATION OF MOBILE TRAFFIC

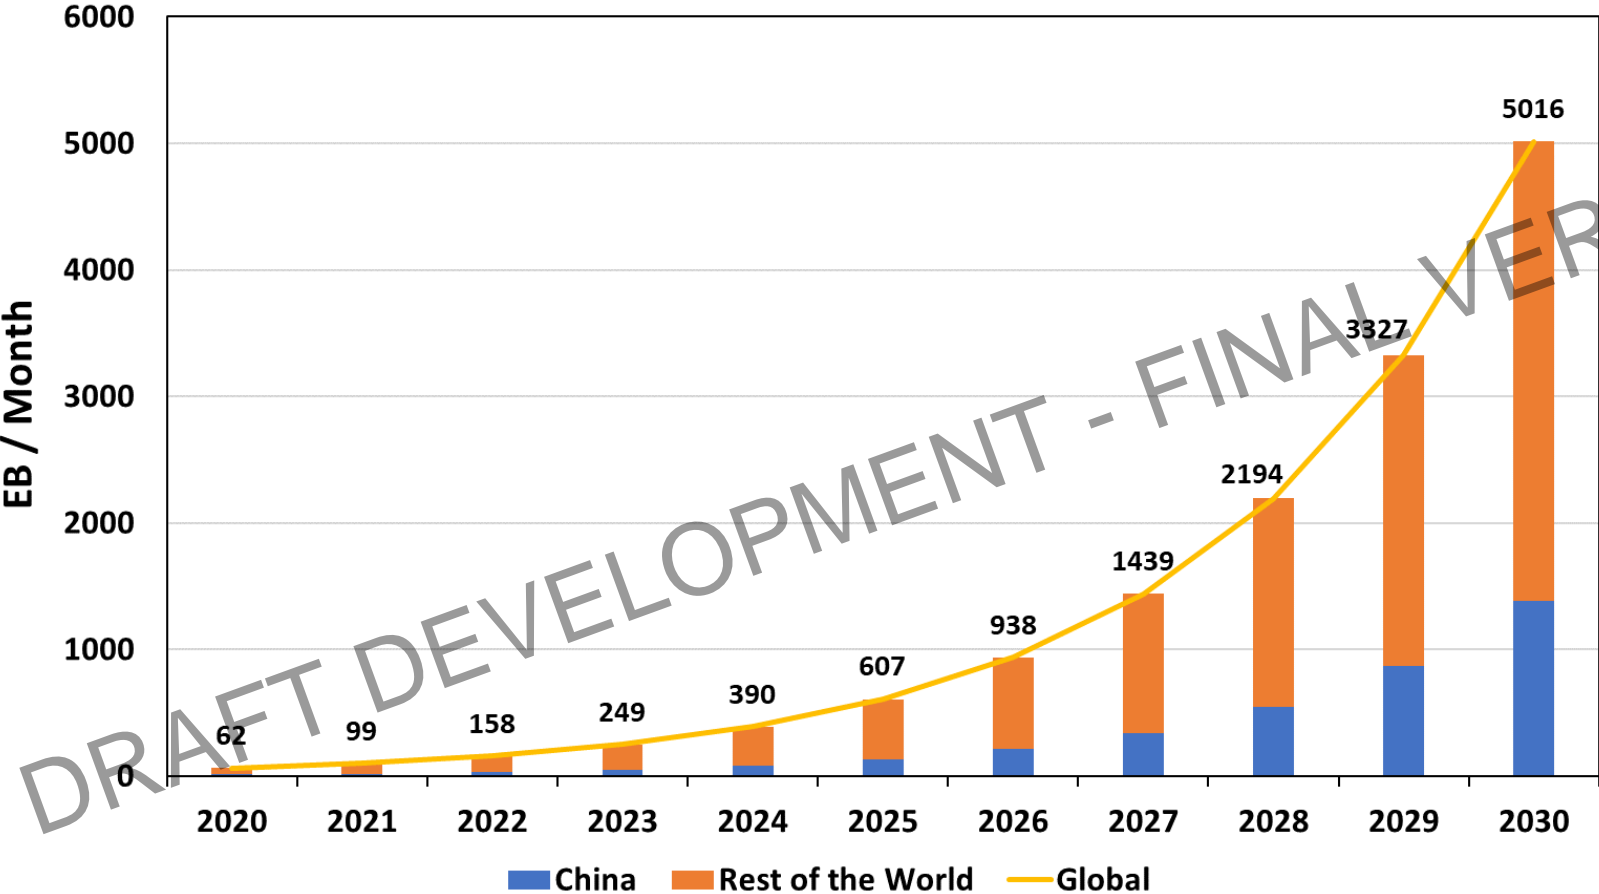

Global mobile traffic is exponential and may even be underestimated

Source: Report ITU-R M.2370-0: IMT traffic estimates for the years 2020 to 2030, <https://www.itu.int/pub/R-REP-M.2370-2015>