

Clarification of proposal for value of TDECQ – SECQ  
Related to comment #7.

***Updated with usage of SECQ***

Peter Stassar, Huawei

IEEE P802.3cu Task Force , Waikoloha, 11 - 12 November 2019

## List of supporters

Mark Kimber, Semtech

Frank Chang, Source Photonics

Ed Ulrichs, Source Photonics

Hai-Feng Liu, HG Genuine

## Introduction, *Updated*

- During the IEEE 802.3 interim meeting in Indianapolis, 9 – 12 September 2019, a baseline specification for 400GBASE-LR4 was agreed, including the insertion of a new parameter “TDECQ – SECQ”, with the value “TBD”.
- The relevant motion, noted in the [minutes](#), passed with Y: 44, N: 1, A: 12.
- The insertion of new the parameter “TDECQ – SECQ” in the baseline specification was based on the information contained in [stassar\\_3cu\\_01\\_0919](#).
- This presentation provides further background to justify the new parameter and also includes a proposal to replace “TBD” with 2.5 dB.
- ***Updated presentation after cu ad hoc call on 6 November 2019.***

## ***Update: usage of SECQ and its definition***

- During the cu ad hoc call on 6 November 2019 a previous version of this presentation and [mazzini\\_3cu\\_adhoc\\_110619](#) were discussed.
- During the call it became evident that many see SECQ as a receiver parameter instead of a (general) transmitter parameter relevant to the transmitter used for testing.
- The intent of the parameter SECQ in the context of this presentation is to mean TDECQ for the “no fiber” case, thus for  $L = 0$ .

# Optical path (dispersion) penalty versus TDP

- In IEEE 802.3 specifications for NRZ modulated systems the parameter TDP (transmitter and dispersion penalty) has been used to distinguish good from bad transmitters.
  - By combining transmitter (distortion) and (chromatic) dispersion penalties in a single parameter, vendors of optical transceivers could trade-off one versus the other and optimize manufacturing yields.
  - The procedure for measuring TDP is provided in Clause 52.9.10
  - Key element is measuring BER on a worst case (dispersion) link
  - If transmitters suffer a high TDP then the specification allows to increase the transmitter power to a higher level, while meeting a minimum value for TX-OMA minus TDP.
  - If a transmitter has very low TDP, then the TX-OMA can be reduced until a certain limit, being 1 dB higher than the TX-OMA minus TDP limit.

## Optical path (dispersion) penalty versus TDP, continued

- In ITU-T optical interface recommendations the parameter optical path penalty has been used to distinguish good from bad transmitter.
  - The major contributor to optical path penalty is chromatic dispersion.
  - Also in this case generally a BER test is done to determine the penalty.
  - In the first optical interface Recommendation G.957 a maximum optical path penalty of 1 dB was defined except for 1550 nm 2.5 Gbit/s applications, where 2 dB was defined.
  - In later Recommendations up to 2 dB was specified for single channel applications and up to 2.5 dB for multi-channel applications (including 0.5 dB Xtalk penalty).
  - The general philosophy for these maximum levels was the experience that above those values, the penalty could increase exponentially versus chromatic dispersion values.
  - It was considered good engineering practice to avoid the exponential area and to define the limits at levels of 2 – 2.5 dB.

# TDECQ versus TDP

- Since IEEE 802.3 introduced PAM4 modulated systems, the parameter TDP could no longer be used in the same way as for NRZ modulated systems.
- TDECQ was introduced as the parameter to distinguish good from bad PAM4 transmitters.
  - In PAM4 systems generally equalizers are used inside receivers to achieve desired receiver performance.
  - To decouple the transmitter TDECQ testing from system receivers a reference equalizer with minimum number of taps was introduced and it is no longer based on a BER test, but based on capturing the waveform and processing it.
  - Unfortunately TDECQ was very new and limited experimental verification was available.
  - During the course of the P802.3bs and P802.3cd projects several modifications were agreed.


# TDECQ in 400GBASE-LR4

- Within the context of the discussions surrounding the creation of a baseline specification for 400GBASE-LR4 in the P802.3cu project (and the preceding SG effort) a lot of experimental data from a variety of vendors was made available.
- Results were reported in [stassar\\_3cu\\_01\\_0919](#), showing:
  - TDECQ versus chromatic dispersion shows a “bathtub” shape with significant scattering.
  - TDECQ minus SECQ versus chromatic dispersion curves show a “bathtub” shape with significantly less scattering and much more consistency.
  - In a private email (8 May 2019) Jonathan King remarked:

*I was impressed by Pete’s graph, and yes I think a proposal to include it would be good. The plots certainly show which transmitters are on the edge of runaway dispersion penalty, much more so than the TDECQ plot.*



# TDECQ minus SECQ in [stassar 3cu 01 0919](#)

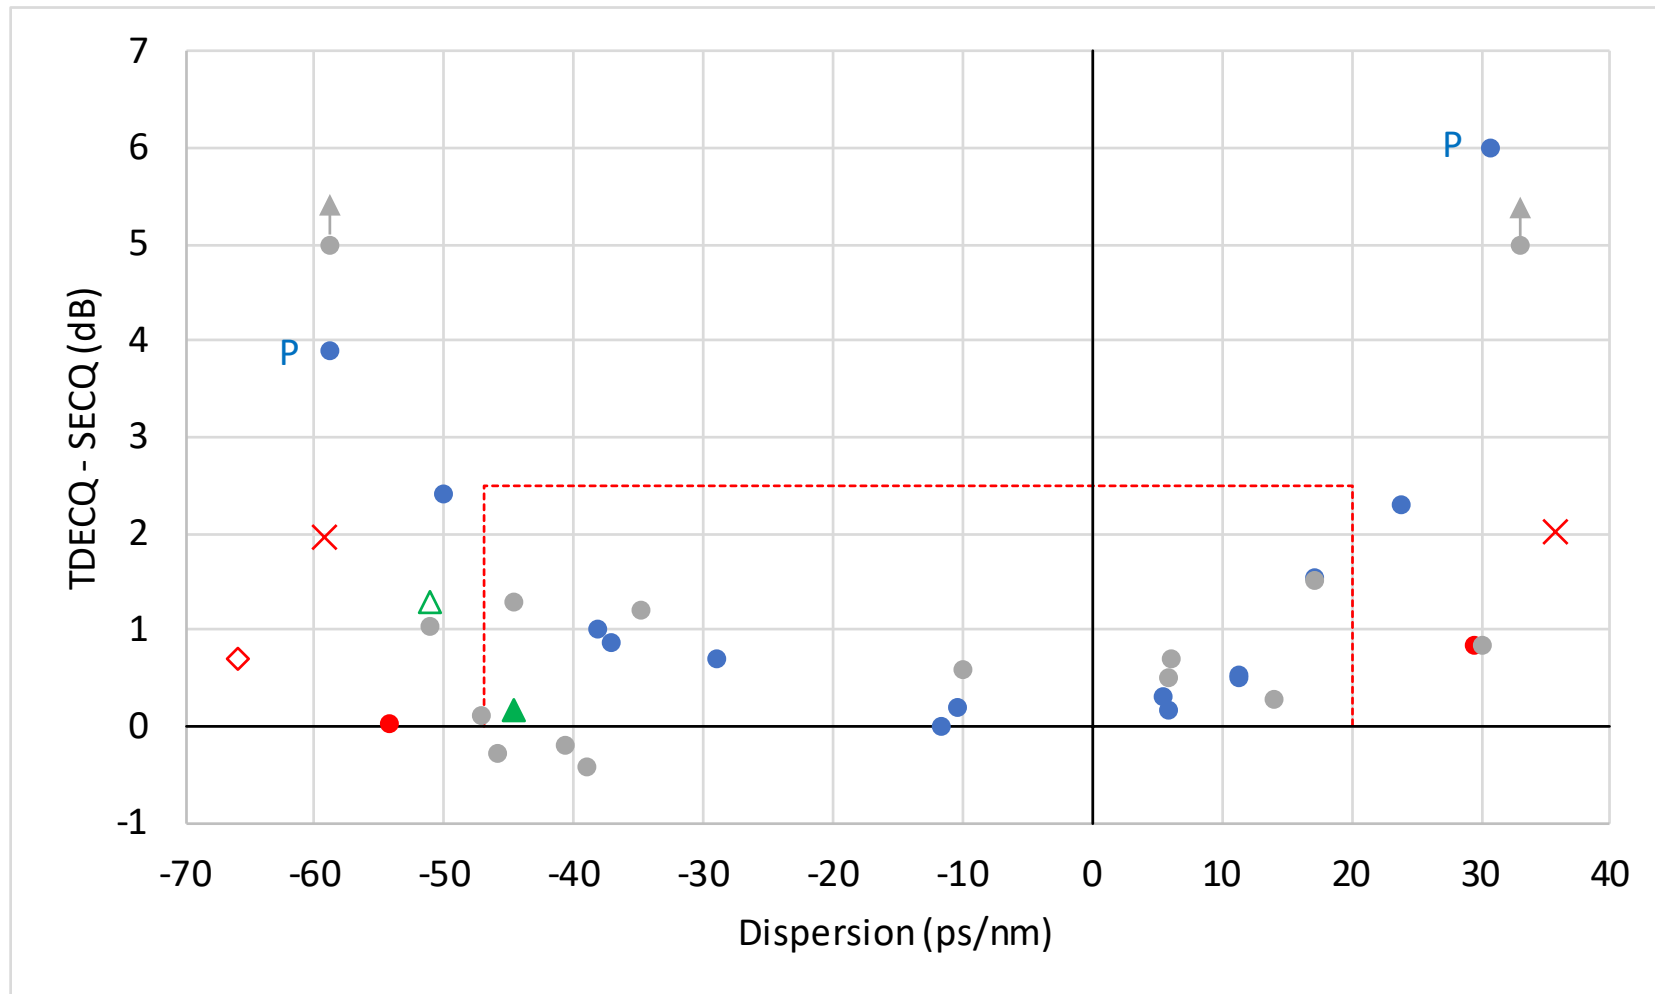

## TDECQ minus SECQ in [stassar\\_3cu\\_01\\_0919](#), continued

- From the results shown on the previous slide it can be concluded that the known phenomena for NRZ modulated systems, that above 2 – 2.5 dB the penalty versus chromatic starts to increase exponentially.
- This is a situation that needs to be avoided, because for small variations of dispersion there can be significant variations of penalty, resulting in unstable/run-away system performance.
- In 400GBASE-LR4, where currently (D1.0) a maximum TDECQ of 3.5 dB is specified, it would be possible that a transmitter would have an SECQ of less than 1 – 1.5 dB, resulting in a TDECQ minus SECQ higher than 2 – 2.5 dB.
- For reasons outlined, it would be wise to avoid this condition.
- It was agreed to include the parameter “TDECQ – SECQ”, with the value “TBD”.
- While 2 dB would be a conservative limit consistent with traditional limits used in ITU-T Recommendations, it is proposed to use the less conservative limit of 2.5 dB.

## ***Update: questions to be answered to progress issue***

The first item to verify after review of this presentation and [welch\\_3cu\\_02\\_1119](#):

- Is there consensus that the chromatic dispersion penalty needs to stay below 2.5dB?

Then:

- If the answer is “yes” then discuss what is best, capturing it in “TDECQ minus SECQ” or “TDECQ –  $10\log_{10}(C_{eq})$ ”
- If the answer is “no” then we need to discuss how to progress.

## ***Updated: Proposal***

**In line with the strawman proposal in [stassar\\_3cu\\_01\\_0919](#) it is proposed to set a limit of 2.5 dB maximum for “TDECQ – SECQ”**

**Update the draft to state that SECQ is TDECQ without fiber.**

Notes:

- It may not be necessary to actually test “TDECQ – SECQ”. SECQ may be a design parameter.
- The IEEE 802.3 specifications do NOT require to measure any of the parameters.

Thanks!